

KERN – Tradition and Innovation for 170 years

An independent family business, KERN since already 7 generations is synonymous with quality and reliability in customer service.

Printed in Germany
by KERN & SOHN GmbH
z-co-gb-kp-20161

KERN

GB

GB

KERN
OPTICS

fast


- 24 hours delivery service – order today, on its way tomorrow
- Sales & service hotline from 8:00 am to 5:00 pm


reliable


- 3 years warranty for instruments over € 400,-
- Certified QM system DIN EN ISO 9001:2008


versatile


- One-stop shopping: from microscope through to refractometer – everything from one supplier
- Quick as a flash, find the product you want with the “Quick-Finder” at www.kern-sohn.com


 **Order hotline**
+49 [0] 7433 9933-0


 **E-mail order**
info@kern-sohn.com

 **www.kern-sohn.com**
For product specification sheets, user manuals, useful information, technical glossary pictures and much more to download

 **Service hotline**
+49 [0] 7433 9933-199

 **Fax Order**
+49 [0] 7433 9933-146

 **Online shop**
www.kern-sohn.com

 **Our team of consultants will assist you**
from Monday to Friday
from 8:00 am to 5:00 pm

KERN & SOHN GmbH
Microscopes and Refractometers
Ziegelei 1
72336 Balingen
Germany

Tel. +49 [0] 7433 9933-0
Fax +49 [0] 7433 9933-146

info@kern-sohn.com
www.kern-sohn.com




2016

MICROSCOPES & REFRACTOMETERS

for laboratory, industry and food

MICROSCOPES & REFRACTOMETERS – for laboratory, industry and food

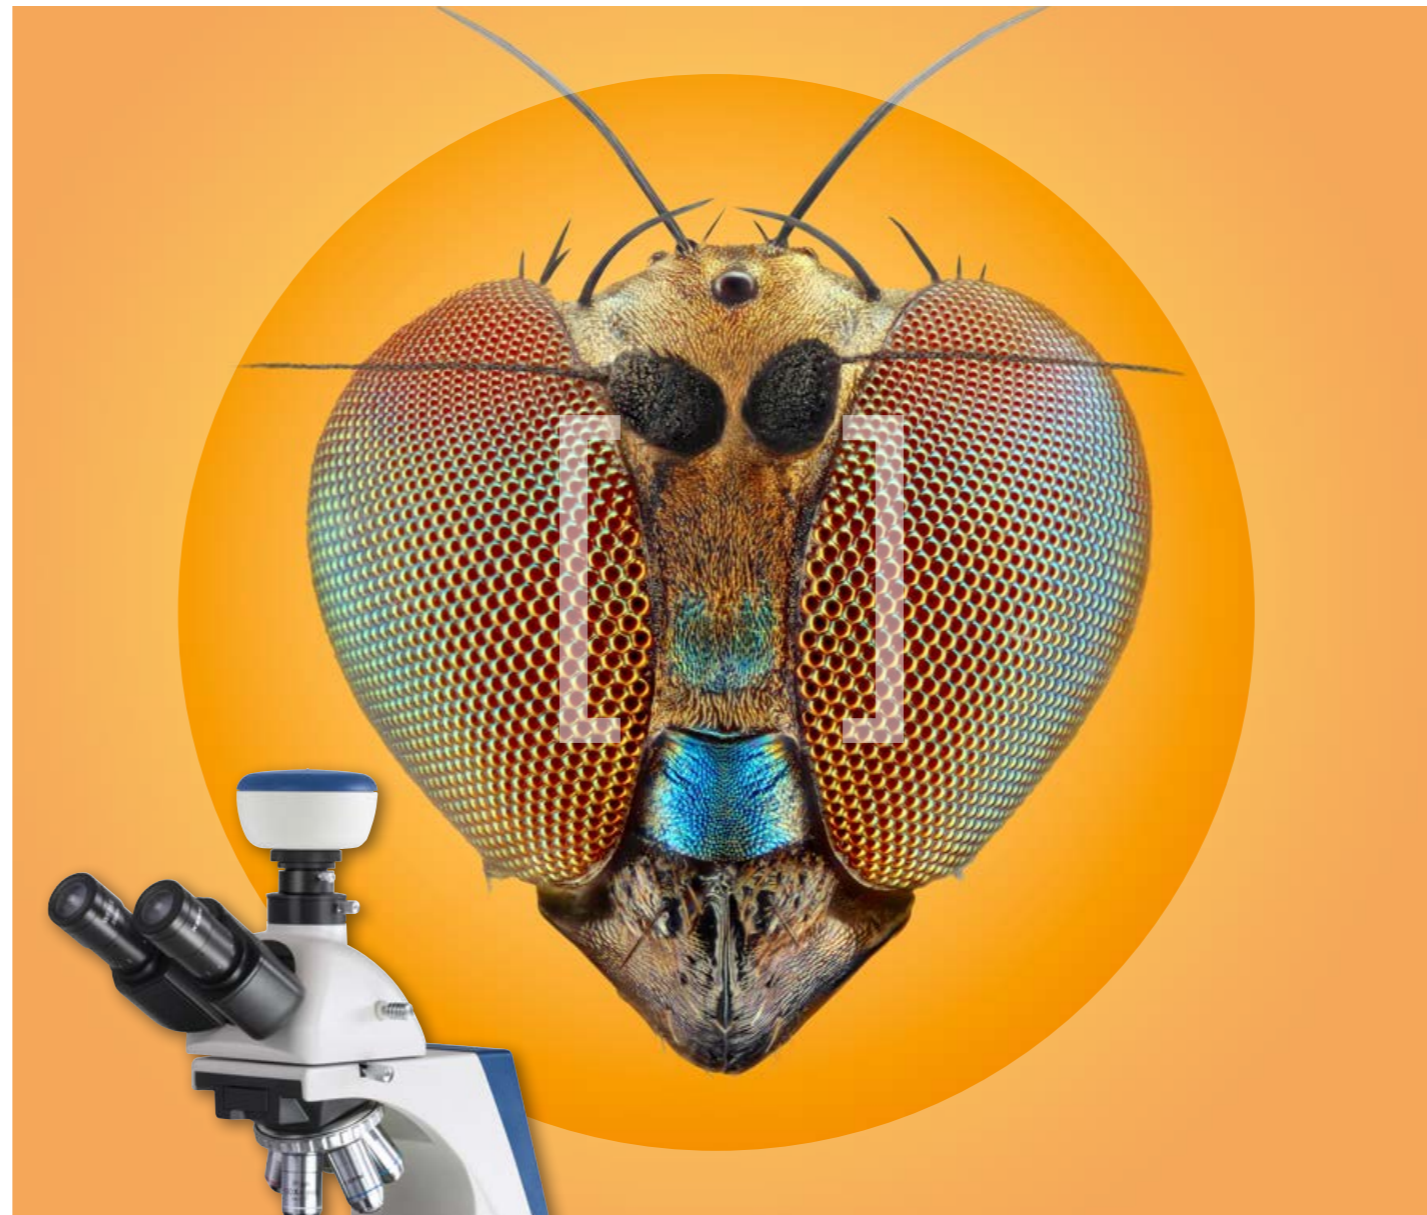

PROFESSIONAL MEASURING


2016


KERN Models A – Z

OBD-1	18	ORT-1	101
OBE-1	9	OSE-4	44
OBF-1	12	OSF-4	46
OBL-12 · OBL-13	14	OSF-4G	48
OBL-14 · OBL-15	16	OSF-5	50
OBN-13	20	OZB-H	79
OBN-14	24	OZB-IR	82
OBN-15	22	OZB-M	77
OCL-2	26	OZB-S	79/80
OCO-2	28	OZB-U	78
OGS-9	42	OZC-5	70
ODC-1	84	OZG-4	72
ODC-8	85/86	OZL-44	52
OKM-1	31	OZL-45	56
OKN-1	33	OZL-45R	58
OKO-1	33	OZL-46	54
OLE-1	35	OZL-9	75
OLF-1	35	OZM-5	60
OPE-1	38	OZM-9	75
OPM-1	40	OZO-5	62
OPN-1	40	OZP-5	64
OPO-1	40	OZR-5	66
ORA	90	OZS-5	68
ORD	96	VIS (OXM-9)	87

Do you have questions about our products?

Our customer consultants will be pleased to assist you:

 UK, IE, MT, Scandinavia
Marietta Diener
Tel. +49 [0] 7433 9933-288
Fax +49 [0] 7433 9933-29288
diener@kern-sohn.com

 USA, CAN, TR, Middle East,
Africa, Oceania
Matthias Huget
Tel. +49 [0] 7433 9933-118
Fax +49 [0] 7433 9933-29118
matthias.huget@kern-sohn.com

 South East Asia
Corinna Klaass
Tel. +49 [0] 7433 9933-215
Fax +49 [0] 7433 9933-29215
Mobil +49 [0] 171 3060086
corinna.klaass@kern-sohn.com

 CZ, SK, Germany (PC 4, 5, 6)
Katharina Wilhelm
Tel. +49 [0] 7433 9933-218
Fax +49 [0] 7433 9933-29218
Mobil +49 [0] 151 46142894
katharina.wilhelm@kern-sohn.com

Special questions for the OPTICS product management:

 Manager KERN Optics
Daniel Junger
Tel. +49 [0] 7433 9933-155
Fax +49 [0] 7433 9933-149
daniel.junger@kern-sohn.com

 Technical Sales &
Product Management KERN Optics
Samuel Haasis
Tel. +49 [0] 7433 9933-173
Fax +49 [0] 7433 9933-29173
samuel.haasis@kern-sohn.com


 Product specialist for optical
instruments
Ralf Gutbrod
Tel. +49 [0] 7433 9933-306
Fax +49 [0] 7433 9933-29306
ralf.gutbrod@kern-sohn.com

Quick help for all questions regarding our technical service and maintenance:

 Technical Service
Frank Eigler
Tel. +49 [0] 7433 9933-166
Fax +49 [0] 7433 9933-195
eigler@kern-sohn.com

 Technical Service
Max Matthes
Tel. +49 [0] 7433 9933-193
Fax +49 [0] 7433 9933-195
matthes@kern-sohn.com

Special questions on sales & marketing:

 Sales Management
Ulrich Ulmer
Tel. +49 [0] 7433 9933-160
Fax +49 [0] 7433 9933-29160
Mobil +49 [0] 172 7423944
ulmer@kern-sohn.com



KERN Pictograms



360° rotatable microscope head



Monocular Microscope
For the inspection with one eye



Binocular Microscope
For the inspection with both eyes



Trinocular Microscope
For the inspection with both eyes and the additional option for the connection of a camera



Abbe Condenser
With high numerical aperture for the concentration and the focusing of light



Halogen illumination
For pictures bright and rich in contrast



LED illumination
Cold, energy saving and especially long-life illumination



Incident illumination
For non-transparent objects



Transmitting illumination
For transparent objects



Fluorescence illumination
For stereomicroscopes



Fluorescence illumination for compound microscopes
With 100 W mercury lamp and filter



Fluorescence illumination for compound microscopes
With 3 W LED illumination and filter



Phase contrast unit
For a higher contrast



Darkfield condenser/unit
For a higher contrast due to indirect illumination



Polarising unit
To polarise the light



Infinity system
Infinity corrected optical system



Zoom magnification
For stereomicroscopes



Parallel optical system
For stereomicroscopes, enables fatigue-proof working



Integrated scale
In the eyepiece



USB 2.0 digital camera
For direct transmitting of the picture to a PC



USB 3.0 digital camera
For direct transmitting of the picture to a PC



HDMI digital camera
For direct transmitting of the picture to a display device



SD card
For data storage



PC software
To transfer the measurements from the device to a PC.



Automatic temperature compensation
For measurements between 10 °C and 30 °C



Protection against dust and water splashes IPxx
The type of protection is shown by the pictogram.



Battery operation
Ready for battery operation. The battery type is specified for each device.



Battery operation rechargeable
Prepared for a rechargeable battery operation



Mains adapter
230V/50Hz in standard version for EU. On request GB, AUS or USA version.



Power supply
Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.



Package shipment
The time required to manufacture the product internally is shown in days in the pictogram.



Warranty
The warranty period is shown in the pictogram.



SLR camera Single-Lens Reflex camera
SWF Super Wide Field (Field number at least ø 23 mm for 10× eyepiece)



W.D. Working Distance
WF Wide Field (Field number up to ø 22 mm for 10× eyepiece)



N.A. Numerical Aperture

Abbreviations

C-Mount Adapter for the connection of a camera to a trinocular microscope

FPS Frames per second

H(S)WF High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)

LWD Long Working Distance

N.A. Numerical Aperture

Why you should choose a KERN microscope now!

For over 170 years, KERN & SOHN has been synonymous with high precision weighing and measuring technology. This claim is the driving force for the development of our microscope and refractometer ranges.

By working closely with you and our production partners, within 3 years we have developed a complete product range of high-quality microscopes and refractometers.

Thanks to consistent customer focus paired with smart ideas and the latest available technology we are proud to be suppliers of high-quality, durable top microscopes and refractometers, which help you to be as efficient as possible in your daily work.

When developing our microscopes we have concentrated on the very best optical quality and have used only high-quality glass and the latest technologies to achieve this. The high-quality Philips halogen and modern LED illumination produce razor-sharp images with high contrast and which will impress you with their brilliant true-colour display – you must have noticed this yourself.

Your advantages:

- all mechanical parts have been designed for a long service life
- special attention has been given to the ergonomics of our microscopes, as this allows the user to work for several hours in a comfortable position which does not cause fatigue
- our microscopes are fully-equipped and can be used immediately
- Highlight for 2016: KERN camera software – you will be amazed at how user-friendly and intuitive it is
- and much more...

Your advantages

1 Quick Delivery
Items in stock are sent the same day if orders are placed before 1:15 pm (valid for parcel service delivery within the EC).

4 3 years warranty
Items under € 400,-: 2 years

Use our practical “Check list for microscopes and refractometers”, which may help you to quickly determine specifications for the future instrument. Together with our KERN product specialist you can choose the right product for you.

If there is no suitable product in the standard range, for example, then we will of course configure an individual microscope for you.

Our aim is to develop a market-driven product solution, so with our microscope and refractometer range, the saying holds true: good quality at a competitive price! This is what we stand for and work towards, every day!

With our current 2016 product range you can benefit from improved quality and a clear reduction in price, which we have been able to achieve through more efficient production methods and increased global sales of our microscopes and refractometers and of course we pass this straight on to you

Do you have any questions about our range of microscopes and refractometers?

Your KERN customer advisers are available at any time to help you further.

I hope that you enjoy working efficiently with our KERN Optics products.

Albert Sauter, Managing Director

Retailer information

Sales conditions

All prices are valid as of January 1st 2016 until a new version of the KERN catalogue is released. In Europe, all prices do not include the applicable V.A.T..

At KERN there is no minimum order value. For orders less than € 15.00 there is no re-sale discount available. A minimum fee of € 15.00 (net) will be charged for orders less than € 15.00 (net).

Delivery Conditions: we supply ex works Balingen, i.e. the transport costs are invoiced. With our contract logistics partners we always offer you shipping at a good rate. When shipping to islands or other more distant areas, or areas which are difficult to access, the transport costs may possibly be higher, please ask for details. Any goods supplied remain KERN's property until complete payment for the goods sold has been received.



Delivery is usually via courier service.



When you see this symbol by truck, please ask for prices.

Extract from general terms and conditions:

Court of jurisdiction/Legal domicile: 72336 Balingen, Germany; Commercial register N°: HRB 400865, AG Stuttgart; Managing director: Albert Sauter, Martin Sauter.

For the full Terms and Conditions, please refer to the website. www.kern-sohn.com/en/kern/agbs.html

Price changes and product changes are likely in individual cases due to product modifications as well as error.

Sale or return: within 14 days of purchase. Not valid for custom processes, such as, for example, special orders.

Warranty: 3 years.

2 years for products with list price ≤ € 400.00

Does not apply to consumables such as batteries, rechargeable battery packs, etc.

Services

Free delivery: all orders from dealers through the KERN Online shop with an order value over € 150.00 (list price) and parcel shipment, within the EU (except of MT, CY) with our parcel service (no pallet shipment) are delivered free of charge.

3 % web discount: Additional discount for dealer orders from the KERN Online shop (only in combination with KERN e-invoice, please ask for details).

KERN DirectCash: The quick, secure COD procedure for protection against non-payment. With the KERN DirectCash COD system, you can safely deliver orders to end customers with unknown credit rating, with no risk of non-payment. Please request further details on this procedure.

Hire Purchase

Financing is available using KERN hire purchase – easy and convenient. Hire Purchase gives you the option of purchasing any product from the range against a simple monthly installment. The product value is financed over the period of the agreement. On payment of the last

installment, the ownership of the contract item automatically transfers from the contractor to the contractee. The Hire Purchase Agreement can – if you so choose – be set for a period of between one and five years. This package includes the transfer of items as well as the guarantee for the entire transfer period. Compared with buying the product, KERN hire purchase offers the advantage that the initial financial investment is largely unnecessary. This is particularly relevant when purchasing a number of products, for example when refitting a laboratory, a company department or a hospital ward. In addition the monthly installments constitute a direct cost and the item does not have to be capitalised by the purchaser.

After-Sales-Service

Repair services within 1 week at our plant in Balingen, transportation costs are additional. In urgent cases, if requested by customer, a replacement device will be provided until all repairs are completed; please ask.

Price reduction on a new device: if repair costs exceed the current value of the defective device, a new device will be offered at a discount price. This offer is valid only up to 2 years after warranty expiration.

Spare parts service within 48 hours, transportation costs are additional.

Marketing support

KERN catalogues, brochures, branch prospectuses – your own personalised marketing tools

This catalogue and branch prospectuses are available free of charge. A neutral version of the catalogue, without the KERN address imprint, is also available for your marketing activities free of charge (200 pcs., larger quantities on request).

On demand, your company logo and address can be printed on the back of the KERN catalogue free of charge (200 pcs., larger quantities on request). In this way you have your own individual marketing tool. The KERN catalogue branch prospectuses are available in the following languages: DE, GB, FR, IT, ES.

Important notice

Humidity

Our models are not suitable for rooms with a high level of air humidity (condensing). Please observe the applicable electrical regulations.

Miscellaneous


Product pictures printed in catalogue

All product pictures contained in our catalogue show devices similar to our products. Please note that possible technical innovations might be the cause of such deviations.

Accessory for optical instruments


Further extensive accessories for our optical instruments you can also find in the KERN Online shop on www.kern-sohn.com

Product group index 2016



Microscopes

1	Compound microscopes	08	1
2	Metallurgical microscopes	30	2
3	Polarising microscopes	37	3
4	Stereomicroscopes	43	4
5	Stereo microscope sets	74	5
6	Stereo microscope modular system	76	6
7	External light sources for stereomicroscopes	81	7
8	Microscope cameras & Software	83	8



Refractometers

9	Analogue refractometers – type: hand-held	90	9
10	Digital refractometers – type: hand-held	96	10
11	Abbe refractometers – type: desktop	101	11

Our new products for 2016:
Innovative products in the usual KERN quality:

**EDUCATIONAL LINE
KERN OBE series**

The new school microscope. The perfect companion for schools, training and laboratories

Further details → page 9

from € 395,-



**LAB LINE
KERN OBF & OBL series**

Available from today:
Our Lab Line in trinocular version

Further details → page 12 and 14

from € 880,-



**LAB LINE
KERN OBL phase contrast**

Phase contrast procedure made easy through powerful features

Further details → page 16

from € 1450,-



**PROFESSIONAL LINE
KERN OBN phase contrast**

Fully-equipped phase contrast microscope for a high level of flexibility

Further details → page 22

only € 2570,-



**KERN butterfly heads for compound microscopes
from the PROFESSIONAL LINE**

The ergonomic microscope head with rotating eyepiece Available in binocular and trinocular version.

Further details → page 20, 21, 23, 25, 34

from € 360,-



KERN darkfield condensers

Professional darkfield application through cardioid construction

Further details → page 13, 15, 19, 21, 25

only € 230,-



KERN 100× objectives (water/dry)

Generate 1000x magnification WITHOUT using oil. Water and air are then used as the immersion media, which ensures high-quality imaging.

Further details → page 10, 11, 13, 15, 17, 19, 21


from € 150,-



KERN stereo microscope sets

Preconfigured stereo microscope set including stand and illumination for a large working distance

Further details → page 74



from € 960,-

Stereo microscope modular system

Universal configuration for the very best level of flexibility and individual work

Further details → page 76



KERN C-mount cameras

Your assistant for professional digital observations

Further details → page 85



from € 320,-

KERN eyepiece cameras

It's easy and in no time at all you're all ready for digital microscopy

Further details → page 86



from € 200,-

KERN USB microscope

Digital microscope for rapid analysis using the screen

Further details → page 86



from € 230,-

KERN Microscope VIS software

The optimum software for measuring, counting and documenting your observation samples

Further details → page 87



Included with every KERN camera delivery

Cleaning sets for microscopes

Flawless image results from a microscope are only possible if you make sure that cleanliness is maintained during and after use. Use the practical KERN cleaning set to help you do this and you will also actively increase the life of your microscope.

Further details → page 42

only € 25,-





Microscopes

1	Compound microscopes Compound, Phase contrast, Digital, Fluorescence and Inverted microscopes	08
2	Metallurgical microscopes	30
3	Polarising microscopes	37
4	Stereomicroscopes Stereo, Stereo-Zoom, Coaxial and Gem microscopes	43
5	Stereo microscope sets	74
6	Stereo microscope modular system	76
7	External light sources for stereomicroscopes Ring illumination and cold light sources	81
8	Microscope cameras & Software	83



Daniel Junger
Manager KERN Optics

Tel. +49 [0] 7433 9933 - 155
Fax +49 [0] 7433 9933 - 149
daniel.junger@kern-sohn.com

1 Compound microscopes

Compound, Phase contrast, Digital, Fluorescence and Inverted microscopes



Compound microscope KERN OBE-1



Trinocular OBE



Monocular OBE



Objectives OBE



Simple polarising unit



Darkfield unit

EDUCATIONAL LINE

The fully equipped all-round compound microscope for school, training and laboratories

Features

- The KERN OBE series is a range of high-quality, fully-equipped compound microscopes, which can't be beaten in terms of ease of use and ergonomic design.
- The strong and continuously dimmable 3 W LED guarantees optimum illumination of the samples and also ensures long service life. Mobile use of several models is also no problem through the use of rechargeable batteries.
- The height-adjustable and thereby focusable 1,25 Abbe condenser with aperture diaphragm is a further quality feature of the OBE series and ensures the very best concentration of light.
- Height adjustment of the fully-equipped mechanical stage is carried out using a coarse and fine focusing knob on both sides. The ergonomically designed coaxial drive enables you to work with the samples and move them rapidly.
- A large selection of different eyepieces and objectives, a simple polarising unit and a darkfield kit are available to you as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of the delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Training, haematology, sediment investigation, doctor's practise.


Applications/Samples

- Translucent, thin, high-contrast, less complex samples (e.g. plant tissue, coloured cells/parasites)

Technical data

- Finite optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided (for binocular and trinocular models)
- Overall dimensions W×D×H 320×180×365 mm
- Net weight approx. 5,5 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
OBE 101 <small>NEW</small>	Monocular	WF 10×/ø 18 mm	Achromatic	4×/10×/40×	3 W LED (transmitted)	395,-
OBE 102 <small>NEW</small>	Binocular	WF 10×/ø 18 mm	Achromatic		3 W LED (transmitted)	495,-
OBE 103 <small>NEW</small>	Binocular	WF 10×/ø 18 mm	Achromatic		3 W LED (transmitted) (battery incl., rechargeable)	570,-
OBE 104 <small>NEW</small>	Trinocular	WF 10×/ø 18 mm	Achromatic		3 W LED (transmitted)	610,-
OBE 111	Monocular	WF 10×/ø 18 mm	Achromatic	4×/10×/40×/100×	3 W LED (transmitted)	460,-
OBE 112	Binocular	WF 10×/ø 18 mm	Achromatic		3 W LED (transmitted)	550,-
OBE 113	Binocular	WF 10×/ø 18 mm	Achromatic		3 W LED (transmitted) (battery incl., rechargeable)	630,-
OBE 114 <small>NEW</small>	Trinocular	WF 10×/ø 18 mm	Achromatic		3 W LED (transmitted)	670,-

NEW New model

Compound microscope KERN OBE-1

Model outfit		Model KERN				Order number	Price/piece excl. of VAT ex works €
		OBE 101	OBE 102	OBE 103	OBE 104		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓	✓✓	✓✓	✓✓	OBB-A1347	40,-
	WF 16×/∅ 13 mm	○	○○	○○	○○	OBB-A1354	45,-
	WF 10×/∅ 18 mm (with Pointer)	○	○	○	○	OBB-A1348	40,-
	WF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	○	○	○	○	OBB-A1349	60,-
Achromatic objectives	4×/0,10	✓	✓	✓	✓	OBB-A1111	35,-
	10×/0,25	✓	✓	✓	✓	OBB-A1108	45,-
	40×/0,65 (spring)	✓	✓	✓	✓	OBB-A1112	70,-
	100×/1,25 (oil) (spring)	○	○	○	○	OBB-A1109	105,-
	20×/0,40	○	○	○	○	OBB-A1110	85,-
	60×/0,85 (spring)	○	○	○	○	OBB-A1113	105,-
	E-Plan 100×/0,80 (dry) (spring)	○	○	○	○	OBB-A1442	150,-
	Plan 100×/1,0 (water) (spring)	○	○	○	○	OBB-A1441	150,-
Monocular tube	30° inclined/360° rotatable	✓				OBB-A1227	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided 		✓	✓		OBB-A1123	
Trinocular tube	<ul style="list-style-type: none"> • see binocular tube • Light distribution 20:80 				✓	OBB-A1341	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 125×115 mm • Travel 50×70 mm 	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 (aperture diaphragm)	✓	✓	✓	✓	OBB-A1101	85,-
Darkfield unit	Usable for 4× – 40× objectives	○	○	○	○	OBB-A1148	85,-
Polarising unit	Analyser/Polariser	○	○	○	○	OBB-A1276	265,-
Illumination	3 W LED illumination system (transmitted) (non-rechargeable)	✓	✓		✓		
	3 W LED illumination system (transmitted) (rechargeable)			✓			
C-Mount	0,5× (focus adjustable)				○	OBB-A1137	160,-
	1×				○	OBB-A1139	100,-

✓ = Included with delivery

○ = Option

Compound microscope KERN OBE-1

Model outfit		Model KERN				Order number	Price/piece excl. of VAT ex works €
		OBE 111	OBE 112	OBE 113	OBE 114		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓	✓✓	✓✓	✓✓	OBB-A1347	40,-
	WF 16×/∅ 13 mm	○	○○	○○	○○	OBB-A1354	45,-
	WF 10×/∅ 18 mm (with Pointer)	○	○	○	○	OBB-A1348	40,-
	WF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	○	○	○	○	OBB-A1349	60,-
Achromatic objectives	4×/0,10	✓	✓	✓	✓	OBB-A1111	35,-
	10×/0,25	✓	✓	✓	✓	OBB-A1108	45,-
	40×/0,65 (spring)	✓	✓	✓	✓	OBB-A1112	70,-
	100×/1,25 (oil) (spring)	✓	✓	✓	✓	OBB-A1109	105,-
	20×/0,40	○	○	○	○	OBB-A1110	85,-
	60×/0,85 (spring)	○	○	○	○	OBB-A1113	105,-
	E-Plan 100×/0,80 (dry) (spring)	○	○	○	○	OBB-A1442	150,-
	Plan 100×/1,0 (water) (spring)	○	○	○	○	OBB-A1441	150,-
Monocular tube	30° inclined/360° rotatable	✓				OBB-A1227	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided 		✓	✓		OBB-A1123	
Trinocular tube	<ul style="list-style-type: none"> • see binocular tube • Light distribution 20:80 				✓	OBB-A1341	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 125×115 mm • Travel 50×70 mm 	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 (aperture diaphragm)	✓	✓	✓	✓	OBB-A1101	85,-
Darkfield unit	Usable for 4× – 40× objectives	○	○	○	○	OBB-A1148	85,-
Polarising unit	Analyser/Polariser	○	○	○	○	OBB-A1276	265,-
Illumination	3 W LED illumination system (transmitted) (non-rechargeable)	✓	✓		✓		
	3 W LED illumination system (transmitted) (rechargeable)			✓			
C-Mount	0,5× (focus adjustable)				○	OBB-A1137	160,-
	1×				○	OBB-A1139	100,-

✓ = Included with delivery

○ = Option

Compound microscope KERN OBF-1



Trinocular version



Simple polarising attachment

LAB LINE

The high-performance compound microscope for every laboratory with fixed, pre-centred Koehler illumination

Features

- The KERN OBF models are excellent, stable laboratory microscopes for all common routine applications. A central feature of this adaptable, robust microscope series is the stable mechanism which can be adjusted precisely.
- Depending on the application, there is a choice of models with strong, continuously dimmable 3 W LED or 20 W halogen illumination (Philips).
- The fixed, pre-centred and focusable 1,25 Abbe condenser with aperture diaphragm and field diaphragm gives you a simplified Koehler illumination, without having to move the centre.
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides.
- A large selection of eyepieces, objectives and colour filters as well as a darkfield condenser and a simple polarising unit are available to you as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Finite optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 395×200×380 mm
- Net weight approx. 6,7 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
OBF 121	Binocular	WF 10×/∅ 18 mm	Achromatic	4×/10×/40×/100×	6 V/20 W Halogen (transmitted)	770,-
OBF 122	Binocular	WF 10×/∅ 18 mm	Plan		6 V/20 W Halogen (transmitted)	880,-
OBF 123	Binocular	WF 10×/∅ 18 mm	Plan		3 W LED (transmitted)	860,-
OBF 131 <small>NEW</small>	Trinocular	WF 10×/∅ 18 mm	Achromatic		6 V/20 W Halogen (transmitted)	880,-
OBF 132 <small>NEW</small>	Trinocular	WF 10×/∅ 18 mm	Plan		6 V/20 W Halogen (transmitted)	990,-
OBF 133 <small>NEW</small>	Trinocular	WF 10×/∅ 18 mm	Plan		3 W LED (transmitted)	970,-

NEW New model

Compound microscope KERN OBF-1

Model outfit		Model KERN						Order number	Price/piece excl. of VAT ex works €
		OBF 121	OBF 131	OBF 122	OBF 132	OBF 123	OBF 133		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	OBB-A1347	40,-
	WF 16×/∅ 13 mm	○	○	○	○	○	○	OBB-A1354	45,-
	WF 10×/∅ 18 mm (with Pointer)	○	○	○	○	○	○	OBB-A1348	40,-
	WF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	○	○	○	○	○	○	OBB-A1349	60,-
	WF 10×/∅ 18 mm (reticule 0,1 mm) (adjustable)	○	○	○	○	○	○	OBB-A1350	90,-
Achromatic objectives	4×/0,10	✓	✓					OBB-A1111	35,-
	10×/0,25	✓	✓					OBB-A1108	45,-
	40×/0,65 (spring)	✓	✓					OBB-A1112	70,-
	100×/1,25 (oil) (spring)	✓	✓					OBB-A1109	105,-
	20×/0,40	○	○					OBB-A1110	85,-
	60×/0,85 (spring)	○	○					OBB-A1113	105,-
Plan objectives	4×/0,10			✓	✓	✓	✓	OBB-A1255	55,-
	10×/0,25			✓	✓	✓	✓	OBB-A1238	75,-
	40×/0,65 (spring)			✓	✓	✓	✓	OBB-A1256	115,-
	100×/1,25 (oil) (spring)			✓	✓	✓	✓	OBB-A1239	150,-
	20×/0,40			○	○	○	○	OBB-A1249	115,-
	60×/0,85 (spring)			○	○	○	○	OBB-A1269	155,-
	100×/1,0 (water) (spring)	○	○	○	○	○	○	OBB-A1441	150,-
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm (for non-infinity system) • Diopter adjustment: One-sided 	✓	○	✓	○	✓	○	OBB-A1129	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 20:80 (for non-infinity system) • Diopter adjustment: One-sided 	○	✓	○	✓	○	✓	OBB-A1345	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs, scale: 2 µm • Two slide holder 	✓	✓	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 precentered (aperture diaphragm)	✓	✓	✓	✓	✓	✓	OBB-A1103	85,-
Darkfield condenser	N.A. 0,85 – 0,91 (dry)	○	○	○	○	○	○	OBB-A1422	230,-
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	✓	✓			OBB-A1370	25,-
	3 W LED illumination system (transmitted) (non-rechargeable)					✓	✓		
Polarising unit	Analyser/Polariser	○	○	○	○	○	○	OBB-A1277	265,-
Colour filters for transmitted illumination	Blue (fitted to the condenser)	✓	✓	✓	✓	✓	✓		
	Green	○	○	○	○	○	○	OBB-A1188	19,-
	Yellow	○	○	○	○	○	○	OBB-A1165	19,-
	Gray	○	○	○	○	○	○	OBB-A1183	19,-
C-Mount	0,47× (focus adjustable)		○		○		○	OBB-A1135	160,-
	1×		○		○		○	OBB-A1142	100,-

✓ = Included with delivery

○ = Option



Trinocular version



Simple polarising attachment

LAB LINE

The flexible laboratory assistant with infinity optical system and fixed, pre-centred Koehler illumination

Features

- The OBL series stands out through its infinity optical unit and is therefore ideally suited for all transmitted illumination applications for the most demanding users. The robust and ergonomic stand base guarantees safe and comfortable working.
- Depending on the application, there is a choice of models with strong, continuously dimmable 3 W LED or 20 W halogen illumination (Philips).
- The fixed, pre-centred and focusable 1,25 Abbe condenser with aperture diaphragm and field diaphragm gives you a simplified Koehler illumination, without having to move the centre.
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides.
- A large selection of eyepieces, objectives and colour filters as well as a darkfield condenser, a simple polarising unit, different phase contrast kits through to HBO and LED fluorescence units are available to you as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions WxDxH 395x200x380 mm
- Net weight approx. 6,7 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eye-piece	Objective quality	Objectives	Illumination	
KERN						
OBL 125	Binocular	WF 10x/φ 20 mm	Infinity E-Plan	4x/10x/40x/100x	6 V/20 W Halogen (transmitted)	930,-
OBL 127	Binocular	WF 10x/φ 20 mm	Infinity E-Plan		3 W LED (transmitted)	930,-
OBL 135 <small>NEW</small>	Trinocular	WF 10x/φ 20 mm	Infinity E-Plan		6 V/20 W Halogen (transmitted)	1040,-
OBL 137 <small>NEW</small>	Trinocular	WF 10x/φ 20 mm	Infinity E-Plan		3 W LED (transmitted)	1040,-

NEW New model

Compound microscopes KERN OBL-12 · 13

Model outfit		Model KERN				Order number	Price/piece excl. of VAT ex works €
		OBL 125	OBL 135	OBL 127	OBL 137		
Eyepieces (23,2 mm)	WF 10×/ø 20 mm	✓✓	✓✓	✓✓	✓✓	OBB-A1351	85,-
	WF 16×/ø 13 mm	○○	○○	○○	○○	OBB-A1354	45,-
	WF 10×/ø 20 mm (with Pointer)	○	○	○	○	OBB-A1448	80,-
	WF 10×/ø 20 mm (reticule 0,1 mm) (adjustable)	○	○	○	○	OBB-A1352	140,-
Infinity E-Plan objectives	4×/0,10	✓	✓	✓	✓	OBB-A1161	90,-
	10×/0,25	✓	✓	✓	✓	OBB-A1159	150,-
	40×/0,65 (spring)	✓	✓	✓	✓	OBB-A1160	265,-
	100×/1,25 (oil) (spring)	✓	✓	✓	✓	OBB-A1158	335,-
	Plan 20×/0,40	○	○	○	○	OBB-A1250	265,-
	Plan 60×/0,85 (spring)	○	○	○	○	OBB-A1270	360,-
	Plan 100×/1,15 (water) (spring)	○	○	○	○	OBB-A1437	445,-
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm (for infinity system) • Diopter adjustment: One-sided 	✓	○	✓	○	OBB-A1130	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 20:80 (for infinity system) • Diopter adjustment: One-sided 	○	✓	○	✓	OBB-A1346	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs, scale: 2 µm • Two slide holder 	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 precentered (aperture diaphragm)	✓	✓	✓	✓	OBB-A1103	85,-
Darkfield condenser	N.A. 0,85 – 0,91 (dry)	○	○	○	○	OBB-A1422	230,-
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓			OBB-A1370	25,-
	3 W LED illumination system (transmitted) (non-rechargeable)			✓	✓		
Polarising unit	Analyser/Polariser	○	○	○	○	OBB-A1277	265,-
Phase contrast units (including PH-condenser and PH-slides)	Single unit with ∞ PH-Plan objective 10×	○	○	○	○	OBB-A1215	320,-
	Single unit with ∞ PH-Plan objective 20×	○	○	○	○	OBB-A1217	360,-
	Single unit with ∞ PH-Plan objective 40×	○	○	○	○	OBB-A1219	430,-
	Single unit with ∞ PH-Plan objective 100×	○	○	○	○	OBB-A1213	520,-
	If required, there are several magnification levels, please contact our OPTICS product management team						
Fluorescence unit	100 W HBO Epi Fluorescence unit, three-hole slide (B/G) including centering objective	○	○	○	○	OBB-A1154	3100,-
	3 W LED Epi Fluorescence unit, three-hole slide (B/G) including centering objective	○	○	○	○	OBB-A1157	3140,-
Colour filters for transmitted illumination	Blue (fitted to the condenser)	✓	✓	✓	✓		
	Green	○	○	○	○	OBB-A1188	19,-
	Yellow	○	○	○	○	OBB-A1165	19,-
	Gray	○	○	○	○	OBB-A1183	19,-
C-Mount	0,47× (focus adjustable)	○	○	○	○	OBB-A1135	160,-
	1×	○	○	○	○	OBB-A1142	100,-

✓ = Included with delivery

○ = Option



NEW



Mounted phase contrast condenser



Simple PH condenser with 40x PH slide

LAB LINE

High-quality phase contrast microscope – specially pre-configured with a series of options for flexible expansion

Features

- We have developed this series specially for general applications with phase contrast method. In addition, the stable, modular construction system of the OBL series offers many more options.
- A strong and continuously adjustable 20 W halogen illumination unit (Philips) ensures the optimum lighting conditions.
- A special fixed, pre-centred phase contrast condenser with aperture diaphragm as well as field diaphragm give you a simplified Koehler illumination and thereby a powerful phase-contrast display of your sample.
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides.
- A large selection of eyepieces, objectives and colour filters, a simple polarising unit as well as further phase contrast units are available to you as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Specially for extremely translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue) with phase contrast

Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 395×200×380 mm
- Net weight approx. 6,7 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBL 145	Binocular	WF 10×/ø 20 mm	Infinity Plan	4×/PH10×/ PH40×/100×	6 V/20 W Halogen (transmitted)	1450,-
OBL 155	Trinocular	WF 10×/ø 20 mm	Infinity Plan		6 V/20 W Halogen (transmitted)	1570,-

Phase contrast microscopes KERN OBL-14 · 15

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OBL 145	OBL 155		
Eyepieces (23,2 mm)	WF 10×/ø 20 mm	✓✓	✓✓	OBB-A1351	85,-
	WF 16×/ø 13 mm	○○	○○	OBB-A1354	45,-
	WF 10×/ø 20 mm (with Pointer)	○	○	OBB-A1448	80,-
	WF 10×/ø 20 mm (reticule 0,1 mm) (adjustable)	○	○	OBB-A1352	140,-
Infinity E-Plan objectives	4×/0,10	✓	✓	OBB-A1161	90,-
	10×/0,25	○	○	OBB-A1159	150,-
	40×/0,65 (spring)	○	○	OBB-A1160	265,-
	100×/1,25 (oil) (spring)	✓	✓	OBB-A1158	335,-
	Plan 20×/0,40	○	○	OBB-A1250	265,-
	Plan 60×/0,85 (spring)	○	○	OBB-A1270	360,-
	Plan 100×/1,15 (water) (spring)	○	○	OBB-A1437	445,-
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm (for infinity system) • Diopter adjustment: One-sided 	✓	○	OBB-A1130	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 20:80 (for infinity system) • Diopter adjustment: One-sided 	○	✓	OBB-A1346	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs, scale: 2 µm • Two slide holder 	✓	✓		
PH condenser	Abbe N.A. 1,25 precentered, for bright field and phase contrast	✓	✓	OBB-A1398	150,-
Phase contrast units	Infinity PH-Plan objective 10×	✓	✓	OBB-A1390	170,-
	Infinity PH-Plan objective 20×	○	○	OBB-A1391	200,-
	Infinity PH-Plan objective 40×	✓	✓	OBB-A1392	260,-
	Infinity PH-Plan objective 100×	○	○	OBB-A1393	345,-
	PH slide 10×	✓	✓	OBB-A1399	75,-
	PH slide 20×	○	○	OBB-A1400	75,-
	PH slide 40×	✓	✓	OBB-A1401	75,-
	PH slide 100×	○	○	OBB-A1402	75,-
	Centering eyepiece	✓	✓		
Darkfield condenser	N.A. 0,85 – 0,91 (dry)	○	○	OBB-A1422	230,-
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	OBB-A1370	25,-
Colour filters for transmitted illumination	Blue (fitted to the condenser)	✓	✓		
	Green	✓	✓	OBB-A1188	19,-
	Yellow	○	○	OBB-A1165	19,-
	Gray	○	○	OBB-A1183	19,-
C-Mount	0,47× (focus adjustable)		○	OBB-A1135	160,-
	1×		○	OBB-A1142	100,-

For further optional accessories, please see the list of items for the OBL-12 and OBL-13 series from page 14

✓ = Included with delivery

○ = Option

Compound microscope KERN OBD-1



Easy connection to the PC, Laptop not included in delivery
Please find the description of the software in chapter 7 (p. 83)

LAB LINE

The digital all-round talent for your applications, documentation and live streaming

Features

- The KERN OBD is an excellent, stable laboratory microscope with integrated camera and infinity optical system, based on the OBL series.
- A strong and continuously adjustable 20 W halogen illumination unit (Philips) ensures the optimum lighting conditions.
- The fixed, pre-centred and focusable 1,25 Abbe condenser with aperture diaphragm and field diaphragm gives you a simplified Koehler illumination, without having to move the centre.
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides.

- A large selection of eyepieces, objectives and colour filters, a simple polarising unit as well as phase contrast units are available to you as accessories.
- Multi-lingual software, USB cable, calibration scale as well as a protective dust cover, eye cups and multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries, if necessary, for training where there will be lots of people observing the screen/beamer at the same time

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 395×200×430 mm
- Net weight approx. 7 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN OBD 127	Binocular/3MP digital/USB 2.0	WF 10×/ø 20 mm	Infinity E-Plan	4×/10×/40×/100×	6 V/20 W Halogen (transmitted)	1530,-
OBD 128 <small>NEW</small>	Binocular/5MP digital/USB 2.0	WF 10×/ø 20 mm	Infinity E-Plan		6 V/20 W Halogen (transmitted)	1690,-

NEW New model

Compound microscope KERN OBD-1

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OBD 127	OBD 128		
Eyepieces (23,2 mm)	WF 10×/ø 20 mm	✓✓	✓✓	OBB-A1351	85,-
	WF 16×/ø 13 mm	○○	○○	OBB-A1354	45,-
	WF 10×/ø 20 mm (with Pointer)	○	○	OBB-A1448	80,-
	WF 10×/ø 20 mm (reticule 0,1 mm) (adjustable)	○	○	OBB-A1352	140,-
Infinity E-Plan objectives	4×/0,10	✓	✓	OBB-A1161	90,-
	10×/0,25	✓	✓	OBB-A1159	150,-
	40×/0,65 (spring)	✓	✓	OBB-A1160	265,-
	100×/1,25 (oil) (spring)	✓	✓	OBB-A1158	335,-
	Plan 20×/0,40	○	○	OBB-A1250	265,-
	Plan 60×/0,80 (spring)	○	○	OBB-A1270	360,-
	Plan 100×/1,15 (water) (spring)	○	○	OBB-A1437	445,-
Digital tube Trinocular (3MP)	<ul style="list-style-type: none"> • 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided • Light distribution 80:20 • Built-in digital 3MP Camera with ½" CMOS • USB port for PC without extra power supply • With multilingual (DE, EN, FR, IT, ES) software "Microscope VIS" for Windows XP, Vista, 7, 8, 10 	✓		OBB-A1126	
Digital tube Trinocular (5MP)	<ul style="list-style-type: none"> • 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided • Light distribution 80:20 • Built-in digital 5 MP Camera with ½,5" CMOS • USB port for PC without extra power supply • With multilingual (DE, EN, FR, IT, ES) software "Microscope VIS" for Windows XP, Vista, 7, 8, 10 		✓	OBB-A1127	
Object micrometer	For calibrating the software measuring function, 0.01 mm division	✓	✓	OBB-A1224	70,-
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Two slide holder 	✓	✓		
Condenser	Abbe N.A. 1,25 precentered (aperture diaphragm)	✓	✓	OBB-A1103	85,-
Darkfield condenser	N.A. 0,85 – 0,91 (dry)	✓	✓	OBB-A1422	230,-
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	OBB-A1370	25,-
Polarising unit	Analyser/Polariser	○	○	OBB-A1277	265,-
Phase contrast units (including PH-condenser and PH-slides)	Single unit with ∞ PH-Plan objective 10×	○	○	OBB-A1215	320,-
	Single unit with ∞ PH-Plan objective 20×	○	○	OBB-A1217	360,-
	Single unit with ∞ PH-Plan objective 40×	○	○	OBB-A1219	430,-
	Single unit with ∞ PH-Plan objective 100×	○	○	OBB-A1213	520,-
	If required, there are several magnification levels, please contact our OPTICS product management team				
Colour filters for transmitted illumination	Blue (fitted to the condenser)	✓	✓		
	Green	○	○	OBB-A1188	19,-
	Yellow	○	○	OBB-A1165	19,-
	Gray	○	○	OBB-A1183	19,-

✓ = Included with delivery

○ = Option

Compound microscope KERN OBN-13



Abbe condenser center-adjustable, also available with swing-out lens



Butterfly head (optionally available)

PROFESSIONAL LINE

Professionalism and versatility united in one microscope – with Koehler illumination for demanding applications

Features

- The OBN series stands out because of its unbeatable and consistently high quality and its ergonomic design. The range of modular components means that the OBN series can be individually customised for the professional user.
- Depending on the application, there is a choice of models with strong, continuously dimmable 3 W LED or 20 W halogen transmitted illumination (Philips).
- This series has a professional Koehler illumination unit with an adjustable field diaphragm as well as a height-adjustable 1,25 Abbe condenser which can be centred and which has an adjustable aperture diaphragm.
- The extremely large mechanical stage with ergonomic, coaxial coarse and fine focusing knob on both sides enables you to adjust and focus your sample rapidly and accurately.
- A wide variety of modular systems, such as, for example, a swing-out condenser, various eyepieces, objectives, colour filters, phase contrast units, a darkfield condenser, a simple polarising unit through to complete fluorescence units are available to you as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 390×200×400 mm
- Net weight approx. 9 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBN 132	Trinocular	WF 10×/ø 20 mm	Infinity Plan	4×/10×/20×/ 40×/100×	6 V/20 W Halogen (transmitted)	1400,-
OBN 135 <small>NEW</small>	Trinocular	WF 10×/ø 20 mm	Infinity Plan		3 W LED (transmitted)	1420,-

NEW New model

Compound microscope KERN OBN-13

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OBN 132	OBN 135		
Eyepieces (23,2 mm)	WF 10×/ø 20 mm	✓✓	✓✓	OBB-A1351	85,-
	WF 16×/ø 13 mm	○○	○○	OBB-A1354	45,-
	WF 10×/ø 20 mm (reticule 0,1 mm) (adjustable)	○	○	OBB-A1352	140,-
Infinity Plan achromatic objectives	4×/0,10	✓	✓	OBB-A1263	110,-
	10×/0,25	✓	✓	OBB-A1243	195,-
	20×/0,40	✓	✓	OBB-A1250	265,-
	40×/0,66 (spring)	✓	✓	OBB-A1257	290,-
	100×/1,25 (oil) (spring)	✓	✓	OBB-A1240	315,-
	2,5×/0,07	○	○	OBB-A1247	265,-
	60×/0,80 (spring)	○	○	OBB-A1270	360,-
	Plan 100×/1,15 (water) (spring)	○	○	OBB-A1437	445,-
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓	✓		
	<ul style="list-style-type: none"> • Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	○	OBB-A1382	520,-
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs • Two slide holder 	✓	✓		
Condenser	Abbe N.A. 1,25 center-adjustable (aperture diaphragm)	✓	✓	OBB-A1102	85,-
	Swing-out condenser N.A. 0,9/0,13 center-adjustable (aperture diaphragm)	○	○	OBB-A1104	220,-
Darkfield condenser	N.A. 0,85 – 0,91 (dry)	✓	✓	OBB-A1421	265,-
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓		OBB-A1370	25,-
	3 W LED illumination system (transmitted) (non-rechargeable)		✓		
Polarising unit	Analyser/Polariser	○	○	OBB-A1283	265,-
Phase contrast units	Quintuple hole turret with 10×/20×/40×/100× Infinity-PH-Plan objectives (complete set)	○	○	OBB-A1237	1590,-
	Single unit with ∞ PH-Plan objective 10×	○	○	OBB-A1214	320,-
	Single unit with ∞ PH-Plan objective 20×	○	○	OBB-A1216	360,-
	Single unit with ∞ PH-Plan objective 40×	○	○	OBB-A1218	430,-
	Single unit with ∞ PH-Plan objective 100×	○	○	OBB-A1212	520,-
	If required, there are several magnification levels, please contact our OPTICS product management team				
C-Mount	1×	○	○	OBB-A1140	100,-
	0,57× (focus adjustable)	○	○	OBB-A1136	160,-
Fluorescence unit	100 W HBO Epi Fluorescence unit 6-filter disc (UV/V/B/G) including centering objective	○	○	OBB-A1155	4400,-
	100 W HBO Epi Fluorescence unit, two-hole slide (B/G) including centering objective	○	○	OBB-A1153	3100,-
	3 W LED Epi Fluorescence unit (B/G) including centering objective	○	○	OBB-A1156	3140,-
Colour filters for transmitted illumination	Blue (fitted to the condenser)	✓	✓		
	Green	○	○	OBB-A1188	19,-
	Yellow	○	○	OBB-A1165	19,-
	Gray	○	○	OBB-A1183	19,-

✓ = Included with delivery

○ = Option

Phase contrast microscope KERN OBN-15

1



NEW



Mounted phase contrast condenser



Quintuple PH universal rotary condenser with 10×/20×/40×/100× Infinity PH-Plan objectives (complete set)

PROFESSIONAL LINE

The powerful, fully-equipped phase contrast microscope with varied options

Features

- This series stands out through its wide-ranging phase-contrast feature which goes beyond the standard OBN level of quality.
- A strong and continuously adjustable 20 W halogen transmitted illumination unit (Philips) ensures the optimum illumination of your samples.
- This series has a professional Koehler illumination unit with a special height-adjustable PH universal rotary condenser which can be centred as well as an aperture diaphragm and field diaphragm.
- The extremely large mechanical stage with ergonomic, coaxial coarse and fine focusing knob on both sides enables you to adjust and focus your sample rapidly and accurately.
- The combination of a professional quintuple condenser wheel, the phase contrast condenser and the Infinity Plan phase contrast objectives makes the KERN OBN 158 a high-quality, fully-equipped microscope for all applications related to contrast procedures.
- A wide variety of modular systems, such as, for example, a swing-out condenser, various eyepieces, objectives, colour filters, a darkfield condenser, a simple polarising unit through to complete fluorescence units are available to you as accessories.
- This centring eyepiece for adjusting the phase contrast, a protective dust cover, eye cups as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Specially for extremely translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue) with phase contrast


Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 390×200×400 mm
- Net weight approx. 9 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBN 158	Trinocular	WF 10×/ø 20 mm	Infinity Plan	4×/PH10×/PH20×/PH40×/PH100×	6 V/20 W Halogen (transmitted)	2570,-

Phase contrast microscope KERN OBN-15

Model outfit		Model KERN	Order number	Price/piece excl. of VAT ex works €
		OBN 158		
Eyepieces (23,2 mm)	WF 10×/∅ 20 mm	✓✓	OBB-A1351	85,-
	WF 16×/∅ 13 mm	○○	OBB-A1354	45,-
	WF 10×/∅ 20 mm (reticule 0,1 mm) (adjustable)	○	OBB-A1352	140,-
Infinity Plan achromatic objectives	4×/0,10	✓	OBB-A1263	110,-
	10×/0,25	○	OBB-A1243	195,-
	20×/0,40	○	OBB-A1250	265,-
	40×/0,66 (spring)	○	OBB-A1257	290,-
	100×/1,25 (oil) (spring)	○	OBB-A1240	315,-
	2,5×/0,07	○	OBB-A1247	265,-
	60×/0,80 (spring)	○	OBB-A1270	360,-
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 - 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓		
	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 - 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	OBB-A1382	520,-
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs • Two slide holder 	✓		
PH condenser	Universal rotary condenser for bright field and phase contrast suitable for 10×/20×/40×/100× PH objectives center-adjustable PH ring units; with aperture diaphragm	✓		
Phase contrast units	Infinity PH-Plan objective 10×	✓	OBB-A1390	170,-
	Infinity PH-Plan objective 20×	✓	OBB-A1391	200,-
	Infinity PH-Plan objective 40×	✓	OBB-A1392	260,-
	Infinity PH-Plan objective 100×	✓	OBB-A1393	345,-
	Centering eyepiece	✓		
Darkfield condenser	N.A. 0,85 - 0,91 (dry)	○	OBB-A1421	265,-
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	OBB-A1370	25,-
Colour filters for transmitted illumination	Blue	○	OBB-A1170	19,-
	Green	✓		
	Yellow	○	OBB-A1165	19,-
	Gray	○	OBB-A1183	19,-
C-Mount	1×	○	OBB-A1140	100,-
	0,57× (focus adjustable)	○	OBB-A1136	160,-

For further optional accessories, please see the list of items for the OBN-13 series from page 20

✓ = Included with delivery

○ = Option

Fluorescence microscope KERN OBN-14



OBN 147



Illumination unit



Sextuple filter wheel OBN 148

PROFESSIONAL LINE

The fluorescence microscope for the professional user

Features

- The fluorescence microscope in the OBN-14 series is based on the usual high quality and versatility of the OBN series. The outstanding, stable design in combination with high-quality optics set the standard in fluorescence microscopy in this class.
- The powerful, dimmable 20 W halogen illumination unit (Philips) and a 100 W Epi fluorescence illumination unit ensure perfect illumination and excitation of your fluorescence samples.
- This series has a professional Koehler illumination unit with an adjustable field diaphragm as well as a height-adjustable 1,25 Abbe condenser which can be centred and which has an adjustable aperture diaphragm.
- The extremely large mechanical stage with ergonomic, coaxial coarse and fine focusing knob on both sides enables you to adjust and focus your sample rapidly and accurately.
- Depending on the version, in addition to the strong 100 W Epi fluorescence unit a modular filter wheel (up to 6 times) (B/G) or (B/G/UV/V) is integrated into the standard product. By turning this filter wheel you can change the excitation filter quickly.
- A large selection of eyepieces, objectives, colour filters, darkfield condensers as well as polarising and phase contrast units can easily be integrated thanks to the modular construction system.
- The centring objective for adjusting the fluorescence, a protective dust cover, eye cups as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Specially for translucent, thin, low-contrast, challenging samples (e.g. immuno fluorescence, FISH, DAPI staining, etc.)


Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions WxDxH 530x220x490 mm
- Net weight approx. 23 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBN 147	Trinocular	WF 10x/φ 20 mm	Infinity Plan	4x/10x/20x/ 40x/100x	Halogen + 100 W Epi Fluorescence (B/G)	4450,-
OBN 148	Trinocular	WF 10x/φ 20 mm	Infinity Plan		Halogen + 100 W Epi Fluorescence (B/G/UV/V)	5710,-

Fluorescence microscope KERN OBN-14

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OBN 147	OBN 148		
Eyepieces (23,2 mm)	WF 10×/∅ 20 mm	✓✓	✓✓	OBB-A1351	85,-
	WF 16×/∅ 13 mm	○○	○○	OBB-A1354	45,-
	WF 10×/∅ 20 mm (reticule 0,1 mm) (adjustable)	○	○	OBB-A1352	140,-
Infinity Plan achromatic objectives	4×/0,10	✓	✓	OBB-A1263	110,-
	10×/0,25	✓	✓	OBB-A1243	195,-
	20×/0,40	✓	✓	OBB-A1250	265,-
	40×/0,66 (spring)	✓	✓	OBB-A1257	290,-
	100×/1,25 (oil) (spring)	✓	✓	OBB-A1240	315,-
	2,5×/0,07	○	○	OBB-A1247	265,-
	60×/0,80 (spring)	○	○	OBB-A1270	360,-
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 - 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓	✓		
	<ul style="list-style-type: none"> • Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 - 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	○	OBB-A1382	520,-
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs • Two slide holder 	✓	✓		
Condenser	Abbe N.A. 1,25 center-adjustable (aperture diaphragm)	✓	✓	OBB-A1102	85,-
	Swing-out condenser N.A. 0,9/0,13 center-adjustable (aperture diaphragm)	○	○	OBB-A1104	220,-
Darkfield condenser	N.A. 0,85 - 0,91 (dry)	✓	✓	OBB-A1421	265,-
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	OBB-A1370	25,-
Polarising unit	Analyser/Polariser	○	○	OBB-A1283	265,-
Phase contrast units	Quintuple hole turret with 10×/20×/40×/100× Infinity-PH-Plan objectives (complete set)	○	○	OBB-A1237	1590,-
	Single unit with ∞ PH-Plan objective 10×	○	○	OBB-A1214	320,-
	Single unit with ∞ PH-Plan objective 20×	○	○	OBB-A1216	360,-
	Single unit with ∞ PH-Plan objective 40×	○	○	OBB-A1218	430,-
	Single unit with ∞ PH-Plan objective 100×	○	○	OBB-A1212	520,-
If required, there are several magnification levels, please contact our OPTICS product management team					
C-Mount	1×	○	○	OBB-A1140	100,-
	0,57× (focus adjustable)	○	○	OBB-A1136	160,-
Fluorescence unit	100 W HBO Epi Fluorescence unit 6-filter disc (UV/V/B/G) including centering objective		✓		
	100 W HBO Epi Fluorescence unit, two-hole slide (B/G) including centering objective	✓			
	3 W LED Epi Fluorescence unit (B/G) including centering objective	○	○	OBB-A1156	3140,-
Colour filters for transmitted illumination	Blue (fitted to the condenser)	✓	✓		
	Green	○	○	OBB-A1188	19,-
	Yellow	○	○	OBB-A1165	19,-
	Gray	○	○	OBB-A1183	19,-

✓ = Included with delivery

○ = Option

Inverted microscope KERN OCL-2



Trinocular head



Stage



Phase contrast slide



Coaxial pinion drive for x/y
Coarse and fine height adjustment

LAB LINE

The inverted Infinity microscope for high level of requirements and large working distance

Features

- The products in the OCL series are inverted microscopes and will impress you with their stability, ergonomic design and high-quality features. The inverted design means that a large working distance is guaranteed, for example for the analysis of cell cultures.
- A strong and continuously adjustable 30 W halogen transmitted illumination unit (Osram) ensures the optimum illumination of your samples.
- A special Abbe N.A. 0.3 condenser with aperture diaphragm and large working distance of 72 mm guarantees the very best working routine in the bright field and with phase-contrast applications.
- The extremely large stage is configured with two specimen holders as standard, one with a diameter of 110 mm and the other with a clip. The precise coarse and fine focusing knob (on both sides) allows optimal adjustment and focusing of your sample.
- Depending on the model, the OCL series is available for left-handed or right-handed operators.
- Further options such as, for example, a large selection of eyepieces, objectives further phase contrast units or a fixed stage can easily be integrated thanks to the modular construction system.
- A dust cover as well as user instructions are included with the delivery.
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Research and breeding of cell cultures and tissue cultures

Applications/Samples

- Particularly for viewing samples in culture vessels (flasks, petri dishes, microtitre plates), translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, tissue, microorganisms if necessary)

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined
- Diopter adjustment: Both-sided
- Overall dimensions WxDxH
510x220x530 mm
- Net weight approx. 13 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OCL 251	Trinocular	HWF 10x/φ 20 mm	Infinity Plan	10x/20x/40x/ 20xPH	6 V/30 W Halogen (transmitted)	2920,-
OCL 252	Trinocular	HWF 10x/φ 20 mm	Infinity Plan		6 V/30 W Halogen (transmitted)	2920,-

Inverted microscope KERN OCL-2

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OCL 251	OCL 252		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OBB-A2403	55,-
	WF 16×/∅ 13 mm	○○	○○	OBB-A2406	65,-
	HWF 10×/∅ 18 mm (reticule 0,1 mm)	○	○	OBB-A2404	200,-
	HWF 10×/∅ 20 mm (reticule 0,1 mm)	○	○	OBB-A2410	100,-
	HWF 10×/∅ 22 mm (Only in combination with tube OBB-A2407/OBB-A2408)	○○	○○	OBB-A2409	70,-
Infinity Plan achromatic objectives for long working distance	4×/0,13	○	○	OBB-A2413	90,-
	10×/0,25	✓	✓	OBB-A2414	155,-
	20×/0,40	✓	✓	OBB-A2415	230,-
	40×/0,60	✓	✓	OBB-A2416	325,-
	60×/0,70	○	○	OBB-A2417	420,-
Binocular tube	• Siedentopf 30° inclined • Interpupillary distance 52 - 75 mm • Diopter adjustment: One-sided	○	○	OBB-A2401	135,-
	• Siedentopf 30° inclined, for 22 mm field of view • Interpupillary distance 52 - 75 mm • Diopter adjustment: One-sided (Only in combination with tube OBB-A2409)	○	○	OBB-A2407	170,-
Trinocular tube	• Siedentopf 30° inclined • Interpupillary distance 52 - 75 mm • Light distribution 80:20 • Diopter adjustment: One-sided	✓	✓		
	• Siedentopf 30° inclined, for 22 mm field of view • Interpupillary distance 52 - 75 mm • Light distribution 80:20 • Diopter adjustment: One-sided (Only in combination with tube OBB-A2409)	○	○	OBB-A2408	250,-
Mechanical stage	• Stage size W×D 180×155 mm, • Travel 80×50 mm • Coaxial coarse and fine focusing knobs	Right handed v.	✓		
		Left handed v.		✓	
	Drop specimen holder (∅ 110)	✓	✓	OBB-A2425	60,-
	Specimen holder (Clip)	✓	✓	OBB-A2426	35,-
Fixed stage	Stage size W×D 240×180 mm	○	○	OBB-A2424	165,-
	Drop specimen holder (∅ 110)	○	○	OBB-A2425	60,-
Condenser	Abbe N.A. 0,3 (aperture diaphragm) LWD 72 mm	✓	✓		
Illumination	6 V/30 W Halogen spare bulb (transmitted)	✓	✓	OBB-A2440	35,-
Phase contrast units	Phase contrast slide	✓	✓	OBB-A2432	95,-
	Infinity PH-Plan objective 10×	○	○	OBB-A2418	195,-
	Infinity PH-Plan objective 20×	✓	✓	OBB-A2419	260,-
	Infinity PH-Plan objective 40×	○	○	OBB-A2420	360,-
	Centering telescope	✓	✓	OBB-A2405	95,-
C-Mount	0,5×	○	○	OBB-A2437	85,-
	1×	○	○	OBB-A2438	55,-
	0,25×	○	○	OBB-A2439	115,-
Colour filters for transmitted illumination	Blue	✓	✓	OBB-A2434	19,-
	Green	✓	✓	OBB-A2435	19,-
	Yellow	✓	✓	OBB-A2436	19,-

✓ = Included with delivery

○ = Option

Inverted microscope KERN OCO-2



Stage



Camera connection and coaxial coarse and fine focusing knob

PROFESSIONAL LINE

The modular, fully-equipped and extra stable inverted microscope with varied options

Features

- The KERN OCO series is part of the group of inverted microscopes and it stands out through its design which is ergonomic, robust and extremely stable. This design, with its large working distance, is particularly suitable for the analysis of cell cultures, for example.
- A strong and continuously adjustable 30 W halogen transmitted illumination unit (Osram) ensures the optimum illumination of your samples.
- A special Abbe N.A. 0,3 condenser with aperture diaphragm and large working distance of 72 mm guarantees the very best working routine in the bright field and with phase-contrast applications.
- As standard, the KERN OCO series is fitted with a trinocular eyepiece tube including a 0,5× C-mount adapter which is delivered with the product, and is fitted on the side.
- Depending on the model, there is a choice of a mechanical stage including a specimen holder (∅ 118 mm) or a fixed stage including a specimen holder (∅ 118 mm and ∅ 54 mm for culture petri dishes).
- Further options such as, for example, eyepieces, objectives, specimen holders and further phase contrast units can easily be integrated thanks to the modular construction system.
- A dust cover as well as user instructions are included with the delivery.
- Please find detailed information in the following charts.

Scope of application

- Research and breeding of cell cultures and tissue cultures

Applications/Samples

- Particularly for viewing samples in culture vessels (flasks, petri dishes, microtitre plates), translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, tissue, microorganisms if necessary)

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 45° inclined
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 600×350×600 mm
- Net weight approx. 26,5 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OCO 255	Trinocular	HWF 10×/∅ 20 mm	Infinity Plan	10×/20×/40×/20×PH	6 V/30 W Halogen (transmitted)	4620,-
OCO 256	Trinocular	HWF 10×/∅ 20 mm	Infinity Plan		6 V/30 W Halogen (transmitted)	4820,-

Inverted microscope KERN OCO-2

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OCO 255	OCO 256		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OBB-A2503	55,-
	WF 16×/∅ 13 mm	○○	○○	OBB-A2507	35,-
	HWF 10×/∅ 20 mm (reticule 0,1 mm)	○	○	OBB-A2410	100,-
	HWF 10×/∅ 22 mm	○○	○○	OBB-A2409	70,-
Infinity Plan achromatic objectives for long working distance	4×/0,13	○	○	OBB-A2413	90,-
	10×/0,25	✓	✓	OBB-A2414	155,-
	20×/0,40	✓	✓	OBB-A2415	230,-
	40×/0,60	✓	✓	OBB-A2416	325,-
	60×/0,70	○	○	OBB-A2417	420,-
Binocular tube	• Siedentopf 45° inclined • Interpupillary distance 52 - 75 mm • Diopter adjustment: One-sided	✓	✓		
	• Siedentopf 45° inclined • Interpupillary distance 48 - 75 mm • Diopter adjustment: One-sided	○	○	OBB-A2502	300,-
Mechanical stage	• Stage size W×D 350×208 mm • Travel 50×50 mm • Coaxial coarse and fine focusing knobs		✓		
	Drop specimen holder (∅ 118)		✓	OBB-A2520	95,-
Fixed stage	• Stage size W×D 240×260 mm • Travel 135×85 mm	✓			
	Drop specimen holder (∅ 118)	✓		OBB-A2520	95,-
	Specimen holder for 96-hole microtitre plate	○		OBB-A2521	70,-
	Specimen holder for 30 mm culture dish	○		OBB-A2562	65,-
	Specimen holder for 54 mm culture dish	✓		OBB-A2522	70,-
	Specimen holder for 60 mm culture dish	○		OBB-A2560	65,-
	Specimen holder for 65 mm culture dish	○		OBB-A2561	65,-
Condenser	Abbe N.A. 0,3 (aperture diaphragm) LWD 72 mm	✓	✓		
Illumination	6 V/30 W Halogen spare bulb (transmitted)	✓	✓	OBB-A2440	35,-
Phase contrast units	Phase contrast slide	✓	✓	OBB-A2432	95,-
	Infinity PH-Plan objective 10×	○	○	OBB-A2418	195,-
	Infinity PH-Plan objective 20×	✓	✓	OBB-A2419	260,-
	Infinity PH-Plan objective 40×	○	○	OBB-A2420	360,-
	Centering telescope	✓	✓	OBB-A2506	95,-
C-Mount	0,5×	✓	✓	OBB-A2531	85,-
	0,25×	○	○	OBB-A2532	115,-
Colour filters for transmitted illumination	Blue	✓	✓	OBB-A2434	19,-
	Green	✓	✓	OBB-A2435	19,-
	Yellow	✓	✓	OBB-A2436	19,-


✓ = Included with delivery

○ = Option

2 Metallurgical microscopes



Metallurgical microscope KERN OKM-1

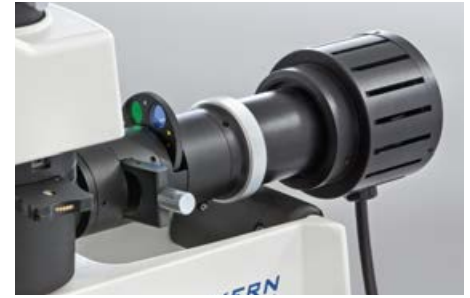

Illumination unit with filter disc



Stage and objectives

LAB LINE MET

The metallurgical reflected light microscope for material testing and surface testing, as well as quality assurance in industry

Features

- The KERN OKM is an excellent metallurgical reflected light microscope, e.g. for surface quality testing of raw materials and finished products in industry.
- The strong, continuously dimmable 30 W halogen reflected illumination unit (Philips) ensures excellent, high-contrast images.
- The illumination unit with an integrated 5-slot filter wheel for blue, green, yellow, grey and blank means that you can quickly change the colour filter for different contrast views.
- A large mechanical stage for reflected illumination applications is configured as standard. The coarse and fine focusing knob on both sides guarantees optimal adjustment and focusing of your sample.
- A large selection of different eyepieces, objectives and a polarising unit are also available.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Metallurgy, material testing, quality assurance

Applications/Samples

- Opaque and thick samples, workpieces (surfaces, fold lines, coatings)

Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 440×200×460 mm
- Net weight basic configuration approx. 8 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN OKM 172	Binocular	WF 10×/ø 18 mm	Infinity Plan	5×/10×/ LWD 20×/ LWD40×	6 V/30 W Halogen (incident)	1850,-
KERN OKM 173 <small>NEW</small>	Trinocular	WF 10×/ø 18 mm	Infinity Plan	5×/10×/ LWD 20×/ LWD40×	6 V/30 W Halogen (incident)	1940,-

NEW New model

For more information, please visit www.kern-sohn.com/en/OKM-1 · Order hotline +49 [0] 7433 9933-0

Metallurgical microscopes

Metallurgical microscope KERN OKM-1

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OKM 172	OKM 173		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓	✓	OBB-A1347	40,-
	WF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	✓	✓	OBB-A1349	60,-
	WF 5×/∅ 20 mm	○	○	OBB-A1355	55,-
	WF 12,5×/∅ 14 mm	○	○	OBB-A1353	75,-
	WF 16×/∅ 13 mm	○	○	OBB-A1354	45,-
Infinity Plan achromatic objectives (no cover glass)	5×/0,11 W.D. 12,10 mm	✓	✓	OBB-A1268	105,-
	10×/0,25 W.D. 4,75 mm	✓	✓	OBB-A1244	195,-
	20×/0,40 (spring) W.D. 2,14 mm	○	○	OBB-A1251	265,-
	40×/0,65 (spring) W.D. 0,45 mm	○	○	OBB-A1258	290,-
Infinity Plan achromatic objectives (no cover glass) for long working distance	20×/0,40 (spring) W.D. 8,35 mm	✓	✓	OBB-A1252	290,-
	40×/0,65 (spring) W.D. 3,90 mm	✓	✓	OBB-A1259	405,-
	50×/0,70 (spring) W.D. 1,95 mm	○	○	OBB-A1266	450,-
	80×/0,80 (spring) W.D. 0,85 mm	○	○	OBB-A1271	500,-
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided 	✓	○	OBB-A1130	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 80:20 • Diopter adjustment: One-sided 	○	✓	OBB-A1346	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 200×140 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs 	✓	✓		
Illumination	6 V/30 W Halogen spare bulb (incident)	✓	✓	OBB-A1372	35,-
Reflected illumination unit	5-filter unit (Blue, Green, Yellow, Gray, Empty)	✓	✓		
	Polarising unit (Incl. analyser and polariser slide)	✓	✓		
C-Mount	1×	○	○	OBB-A1142	100,-
	0,47× (focus adjustable)	○	○	OBB-A1135	160,-

✓ = Included with delivery

○ = Option



Stage OKN



Stage OKO



Illumination unit

PROFESSIONAL LINE MET

The fully-equipped reflected and transmitted light microscope for numerous applications in metallurgy

Features

- The KERN OKN and OKO series are professional, versatile, metallurgical microscopes, which are used in testing metals and analysing surfaces.
- You can choose between two reflected illumination units: A 50 W halogen reflected illumination unit or a premium illumination unit with stunning 100 W reflected illumination for powerful performance.
- A height-adjustable 1,25 Abbe condenser which can be centred as well as a field diaphragm are available for the transmitted light variants (KERN OKO series), for complete professional Koehler illumination.
- The KERN OKO transmitted illumination variant is fitted with an open, mechanical stage, as standard. On the other hand, the KERN OKN reflected illumination variant has a closed, mechanical stage, as standard.
- A simple polarising unit (analyser and polariser) is included with delivery.
- A large selection of accessories, such as, for example, a trinocular eyepiece tube, eyepieces and further objectives are available for longer working distances.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Metallurgy, material testing, quality assurance

Applications/Samples

- Opaque and thick samples, workpieces (surfaces, fold lines, coatings)

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 550×200×460 mm
- Net weight basic configuration approx. 14,5 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
OKN 175	Binocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/ LWD40×	12 V/50 W Halogen (incident)	2250,-
OKO 176	Binocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/ LWD40×/100×	12 V/50 W Halogen (incident) + 6 V/20 W (transmitted)	2820,-
OKN 177	Binocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/ LWD40×	12 V/100 W Halogen (incident)	2490,-
OKO 178	Binocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/ LWD40×/100×	12 V/100 W Halogen (incident) + 6 V/20 W (transmitted)	3050,-

Metallurgical microscopes KERN OKN-1 · OKO-1

Model outfit		Model KERN				Order number	Price/piece excl. of VAT ex works €
		OKN 175	OKO 176	OKN 177	OKO 178		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓✓	✓✓	✓✓	✓✓	OBB-A1347	40,-
	WF 10×/∅ 18 mm (reticule 0,1 mm) (adjustable)	✓	✓	✓	✓	OBB-A1350	90,-
	WF 5×/∅ 20 mm	○	○	○	○	OBB-A1355	55,-
	WF 12,5×/∅ 14 mm	○	○	○	○	OBB-A1353	75,-
	WF 16×/∅ 13 mm	○	○	○	○	OBB-A1354	45,-
Infinity Plan objectives (no cover glass)	5×/0,11 W.D. 6,73 mm	✓	✓	✓	✓	OBB-A1268	105,-
	10×/0,25 W.D. 4,19 mm	✓	✓	✓	✓	OBB-A1244	195,-
	20×/0,40 (spring) W.D. 2,14 mm	○	○	○	○	OBB-A1251	265,-
	40×/0,65 (spring) W.D. 0,45 mm	○	○	○	○	OBB-A1258	290,-
	100×/1,25 (oil) (spring) W.D. 0,12 mm		✓		✓	OBB-A1241	315,-
Infinity Plan objectives (no cover glass) for long working distance	20×/0,40 (spring) W.D. 8,35 mm	✓	✓	✓	✓	OBB-A1252	290,-
	40×/0,65 (spring) W.D. 3,90 mm	✓	✓	✓	✓	OBB-A1259	405,-
	50×/0,70 (spring) W.D. 1,95 mm	○	○	○	○	OBB-A1266	450,-
	80×/0,80 (spring) W.D. 0,85 mm	○	○	○	○	OBB-A1271	500,-
Binocular tube	• Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: Both-sided	✓	✓	✓	✓		
	• Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: Both-sided	○	○	○	○	OBB-A1359	360,-
Trinocular tube	• Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75mm • Light distribution 100:0 • Diopter adjustment: Both-sided	○	○	○	○	OBB-A1344	420,-
	• Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided	○	○	○	○	OBB-A1382	520,-
Mechanical stage for reflection	• Stage size W×D 200×140 mm • Travel 78×55 mm • Stage fast lowering unit • Stage Up-Down moving range: max. 50 mm	✓		✓			
Mechanical stage for transmitted illumination	• Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs		✓		✓		
Stage plate	Plate for sample placement	✓	✓	✓	✓		
Glass plate	Glass plate		○		○	OBB-A1378	40,-
Reflected illumination unit	Polarising unit (Incl. analyser, polariser and blue filter slide)	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 (aperture diaphragm)		✓		✓	OBB-A1380	90,-
Illumination	6 V/20 W Halogen spare bulb (transmitted)		✓		✓	OBB-A1370	25,-
	12 V/50 W Halogen spare bulb (incident)	✓	✓			OBB-A1207	19,-
	12 V/100 W Halogen spare bulb (incident)			✓	✓	OBB-A1377	35,-
Polarising unit	for transmitted illumination		✓		✓	OBB-A1470	135,-
Colour filters for transmitted illumination	Blue (fitted to the condenser)		✓		✓		
	Green		○		○	OBB-A1188	19,-
	Yellow		○		○	OBB-A1165	19,-
	Gray		○		○	OBB-A1183	19,-
C-Mount	1×	○	○	○	○	OBB-A1140	100,-
	0,57× (focus adjustable)	○	○	○	○	OBB-A1136	160,-

✓ = Included with delivery

○ = Option



EDUCATIONAL LINE MET

The compact inverted metallurgical microscope for details with large workpieces

Features

- The inverted series – KERN OLE and KERN OLF – stand out through their design which is compact, stable and ergonomic.
- The strong, continuously dimmable 3 W LED reflected illumination guarantees a permanent optimum illumination of the materials being tested.
- A mechanical stage with additional plate (opening \varnothing 10 mm and \varnothing 20 mm) is included with delivery as standard. The coarse and fine focusing knob on both sides guarantees optimal adjustment and focusing.
- Colour filters (blue, green and grey) are included with delivery.
- A large selection of eyepieces, stage inserts and objectives for a larger working distance are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Training, metallurgy, material testing, quality assurance

Applications/Samples

- Inverted opaque or translucent samples, workpieces (surfaces, fold lines, coatings), inverted viewing

Technical data

- Finite optical system
- Quadplex nosepiece
- Tube 45° inclined
- Diopter adjustment: One-sided (for binocular models)
- Overall dimensions WxDxH 340x190x330 mm
- Net weight basic configuration approx. 7 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OLE 161	Monocular	WF 10x/ \varnothing 18 mm	Plan	10x/20x/40x	3 W LED (incident)	1310,-
OLF 162	Binocular	WF 10x/ \varnothing 18 mm	Plan		3 W LED (incident)	1390,-

Metallurgical inverted microscopes KERN OLE-1 · OLF-1

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OLE 161	OLF 162		
Eyepieces (23,2 mm)	WF 10×/ø 18 mm	✓	✓✓	OBB-A1347	40,-
	WF 12,5×/ø 14 mm	○	○○	OBB-A1353	75,-
	WF 16×/ø 13 mm	○	○○	OBB-A1354	45,-
	WF 5×/ø 20 mm	○	○○	OBB-A1355	55,-
	WF 10×/ø 18 mm (reticule 0,1 mm) (non-adjustable)	○	○○	OBB-A1349	60,-
Plan achromatic objectives	Plan 10×/0,25	✓	✓	OBB-A1246	140,-
	Plan 20×/0,35 (spring)	✓	✓	OBB-A1253	220,-
	Plan 40×/0,65 (spring)	✓	✓	OBB-A1261	220,-
	Plan 100×/1,25 (spring) (oil)	○	○	OBB-A1242	245,-
	Plan 4×/0,10	○	○	OBB-A1265	115,-
Plan achromatic objectives for long working distance	PL L 40×/0,60 W.D. 3,64 mm	○	○	OBB-A1262	420,-
	PL L 50×/0,70 W.D. 3,01 mm	○	○	OBB-A1267	420,-
	PL L 80×/0,80 (spring) W.D. 1,08 mm	○	○	OBB-A1272	460,-
Monocular tube	45° inclined	✓		OBB-A1228	
Binocular tube	· 45° inclined · Diopter adjustment: One-sided		✓	OBB-A1128	
Mechanical stage	· Stage size W×D 180×180 mm · Travel 50×40 mm	✓	✓		
Extra stage plate	1 (opening ø 10 mm)	✓	✓	OBB-A1322	40,-
	2 (opening ø 20 mm)	✓	✓	OBB-A1323	40,-
	3 (opening ø 40 mm)	○	○	OBB-A1324	40,-
Illumination	3 W LED illumination system (incident)	✓	✓		
Colour filters for transmitted illumination	Blue	✓	✓	OBB-A1174	19,-
	Green	✓	✓	OBB-A1190	19,-
	Gray	✓	✓	OBB-A1184	19,-

✓ = Included with delivery

○ = Option

3 Polarising microscopes



Polarising microscope KERN OPE-1



λ Slip and quartz wedge

EDUCATIONAL LINE POL

The economical polarising microscope for training, laboratory and industry

Features

- The KERN OPE series is a range of excellent polarising microscopes with transmitted light for all common routine applications, such as, for example observation and analysis of translucent, isotropic materials such as, for example, crystals or minerals
- The strong, continuously dimmable 20 W halogen transmitted illumination is the basis for excellent and high-contrast images.
- The height-adjustable and focusable 1,25 Abbe condenser with aperture diaphragm is a further quality feature of the KERN OPE series and ensures the very best adjustment of the illumination.
- A quadruple nosepiece enables rapid and simple changing to the different magnification levels. As standard, the nosepiece is fitted with three achromatic "non stress" polarising objectives
- The monocular eyepiece tube is fitted with a polarising unit, a Bertrand lens and a $\lambda + \frac{1}{4} \lambda$ Slip.
- A 360° revolving stage with 1° division, 6' fine division and locking function is integrated into the KERN OPE series as standard.
- A large selection of accessories such as, for example, a quartz wedge, a mechanical table attachment as well as further objectives are available.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Training, mineralogy, texture observations, material testing, observation of crystals

Applications/Samples

- Less complex samples with polarising properties

Technical data

- Finite optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Overall dimensions W×D×H 320×180×380 mm
- Net weight approx. 5,5 kg

STANDARD



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OPE 118	Monocular	WF 10×/∅ 18 mm	Achromatic	Non-stress 4×/10×/40×	6 V/20 W Halogen (transmitted)	890,-

Polarising microscope KERN OPE-1

Model outfit		Model KERN	Order number	Price/piece excl. of VAT ex works €
		OPE 118		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	✓	OBB-A1349	60,-
	WF 16×/∅ 13 mm	○	OBB-A1354	45,-
Non-stress achromatic objectives	4×/0,10	✓	OBB-A1280	45,-
	10×/0,25	✓	OBB-A1278	65,-
	40×/0,66 (spring)	✓	OBB-A1281	70,-
	20×/0,40	○	OBB-A1279	80,-
	60×/0,80 (spring)	○	OBB-A1282	90,-
Monocular tube	30° inclined/360° rotatable	✓	OBB-A1227	105,-
Analyser unit	0 – 90°, can easily be moved out of the optical path	✓		
Bertrand lens	Can easily be moved out of the optical path	✓	OBB-A1120	230,-
λ + ¼ λ Slip	λ Slip and ¼ λ Slip (combination)	✓	OBB-A1316	140,-
Quartz wedge	I – IV Class	○	OBB-A1320	240,-
Revolving round stage	360° rotatable, Division 1°, Fine division 6', locking fuction	✓		
Polarising attached mechanical stage	Polarising attached mechanical stage	○	OBB-A1337	270,-
Condenser	Abbe N.A. 1,25 (aperture diaphragm)	✓	OBB-A1101	85,-
Polarising unit	Can be moved out of the optical path	✓		
Colour filters for transmitted illumination	Blue (holder ring)	✓	OBB-A1173	45,-
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	OBB-A1370	25,-

✓ = Included with delivery

○ = Option



Bertrand lens, λ Slip, 360° rotatable analyser (removable)



Center-adjustable and turnable polarisation stage



"Swing-Out" condenser

PROFESSIONAL LINE POL

The flexible and powerful polarising microscope for all professional applications with reflected and transmitted light

Features

- These devices are professional, fully-equipped polarising microscopes, which use the polarisation of light to analyse minerals, crystals and isotropic materials.
- You can choose between a pure transmitted light variant (KERN OPM), a pure reflected light variant (KERN OPN) and a combi variant (KERN OPO). A complete Koehler illumination is integrated into all series as standard.
- As standard, the KERN OPM and OPO transmitted illumination variants have a height-adjustable 0,9/0,13 swing-out Abbe condenser which can be centred, for complete Koehler illumination.
- A 360° revolving stage with 1° division, 6' fine division and locking function is integrated into all series as standard.
- As standard all series are fitted with a complete polarising unit with scale, a Bertrand lens, a $\lambda + \frac{1}{4} \lambda$ Slip as well as a quartz wedge.
- A large selection of accessories such as, for example, a mechanical stage attachment as well as further objectives for a long working distance and filter units are also available.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Mineralogy, texture observations, material testing, observation of crystals

Applications/Samples

- More complex samples with polarising properties

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions WxDxH 500x200x500 mm
- Net weight approx. 14,5 kg

STANDARD



OPTION



Model	Standard configuration					Price excl. of VAT ex works €
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
OPM 181	Binocular	WF 10x/φ 20 mm	Inifnity Plan	Non-stress 4x/10x/20x/40x	6 V/20 W Halogen (transmitted)	3490,-
OPN 182	Binocular	WF 10x/φ 18 mm	Inifnity Plan	Non-stress 4x/10x/20x/40x	12 V/50 W Halogen (incident)	3490,-
OPO 183	Binocular	WF 10x/φ 18 mm	Inifnity Plan	Non-stress 4x/10x/20x/40x/60x	12 V/50 W Halogen (incident) + 6 V/20 W (transmitted)	4920,-
OPN 184	Binocular	WF 10x/φ 18 mm	Inifnity Plan	Non-stress 4x/10x/20x/40x	12 V/100 W Halogen (incident)	3700,-
OPO 185	Binocular	WF 10x/φ 18 mm	Inifnity Plan	Non-stress 4x/10x/20x/40x/60x	12 V/100 W Halogen (incident) + 6 V/20 W (transmitted)	5100,-

Polarising microscopes KERN OPM-1 · OPN-1 · OPO-1

Model outfit		Model KERN					Order number	Price/piece excl. of VAT ex works €
		OPM 181	OPN 182	OPO 183	OPN 184	OPO 185		
Eyepieces (23,2 mm)	WF 10×/18 mm		✓	✓	✓	✓	OBB-A1347	40,-
	WF 10×/18 mm (reticule 0,1 mm) (adjustable)		✓	✓	✓	✓	OBB-A1464	90,-
	WF 10×/20 mm	✓					OBB-A1351	85,-
	WF 10×/20 mm (reticule 0,1 mm) (adjustable)	✓					OBB-A1465	140,-
Non-stress Infinity Plan objectives	4×/0,10	✓	✓	✓	✓	✓	OBB-A1294	105,-
	10×/0,25	✓	✓	✓	✓	✓	OBB-A1289	200,-
	20×/0,40 (spring)	✓	✓	✓	✓	✓	OBB-A1290	265,-
	40×/0,65 (spring)			✓		✓	OBB-A1292	310,-
	40×/0,65 (spring) (no cover glass)	✓	✓	○	✓	○	OBB-A1288	390,-
	60×/0,80 (spring)	○	○	✓	○	✓	OBB-A1296	370,-
Infinity Plan objectives (no cover glass) for long working distance	LWD 20×/0,40 (spring) W.D. 8,35 mm	○	○	○	○	○	OBB-A1291	345,-
	LWD 40×/0,65 (spring) W.D. 3,90 mm	○	○	○	○	○	OBB-A1293	390,-
	LWD 50×/0,70 (spring) W.D. 1,95 mm	○	○	○	○	○	OBB-A1295	415,-
	LWD 80×/0,80 (spring) W.D. 0,85 mm	○	○	○	○	○	OBB-A1297	500,-
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided 	✓	✓	✓	✓	✓		
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: One-sided 	○	○	○	○	○	OBB-A1447	455,-
Professional dedicated polarising binocular head	To keep the reticular cross in the right-hand eyepiece in the same position, independent of the adjustment of the tube.	○	○	○	○	○	OBB-A1209	430,-
Professional dedicated polarising trinocular head		○	○	○	○	○	OBB-A1210	550,-
Analyser unit with scale	360° rotatable, lockable	✓	✓	✓	✓	✓		
Bertrand lens	Built-in, center-adjustable	✓	✓	✓	✓	✓	OBB-A1121	305,-
λ + ¼ λ Slip	λ Slip and ¼ λ Slip (combination)	✓	✓	✓	✓	✓	OBB-A1316	140,-
Quartz wedge	I – IV Class	✓	✓	✓	✓	✓	OBB-A1321	240,-
Revolving round stage	360° rotatable, center-adjustable, division 1°, Vernier division 6'	✓	✓	✓	✓	✓		
Polarising attached mechanical stage	Polarising attached mechanical stage	○	○	○	○	○	OBB-A1337	270,-
Swing-out condenser	N.A. 0,9/0,13 swing-out achromatic condenser (aperture diaphragm)	✓		✓		✓	OBB-A1107	135,-
Polarising unit with scale (transmitted)	360° rotatable, lockable	✓		✓		✓		
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓		✓		✓	OBB-A1370	25,-
Reflecting polarising unit replacement bulb	12 V/50 W Halogen		✓	✓	○	○	OBB-A1207	19,-
	12 V/100 W Halogen		○	○	✓	✓	OBB-A1377	35,-
Colour filters for transmitted illumination	Blue	✓		✓		✓	OBB-A1170	19,-
	Green	○		○		○	OBB-A1188	19,-
	Yellow	○		○		○	OBB-A1165	19,-
	Gray	○		○		○	OBB-A1183	19,-
C-Mount	1×	○	○	○	○	○	OBB-A1140	100,-
	0,57× (focus adjustable)	○	○	○	○	○	OBB-A1136	160,-

✓ = Included with delivery

○ = Option

Cleaning sets for microscopes KERN OCS-901



NEW



Cleaning sets for microscopes

Features

- This economical and fully equipped 7-piece cleaning set contains everything you need for the very best care of your microscope.
- A silicon hand blower, dust brush, 60 ml of cleaning liquid, lint-free duster, optical cleaning cloths and cleaning swabs. You get all that in a high-quality KERN storage bag which you can also easily fix onto your belt.
- You can use this set not only to gently clean your microscope, but also for example your camera, binoculars or all other optical surfaces.

Model	Description	Price excl. of VAT ex works €
KERN		
OCS 901	7-piece cleaning sets for microscopes und other optical instruments	25,-

Microscopy, measuring technology and testing services from a single source



Optical instruments catalogue



Balances & test service catalogue



Medical scales catalogue




SAUTER measuring equipment catalogue



DAkkS calibration service brochure

4 Stereomicroscopes

Stereo, Stereo-Zoom, Coaxial and Gem microscopes

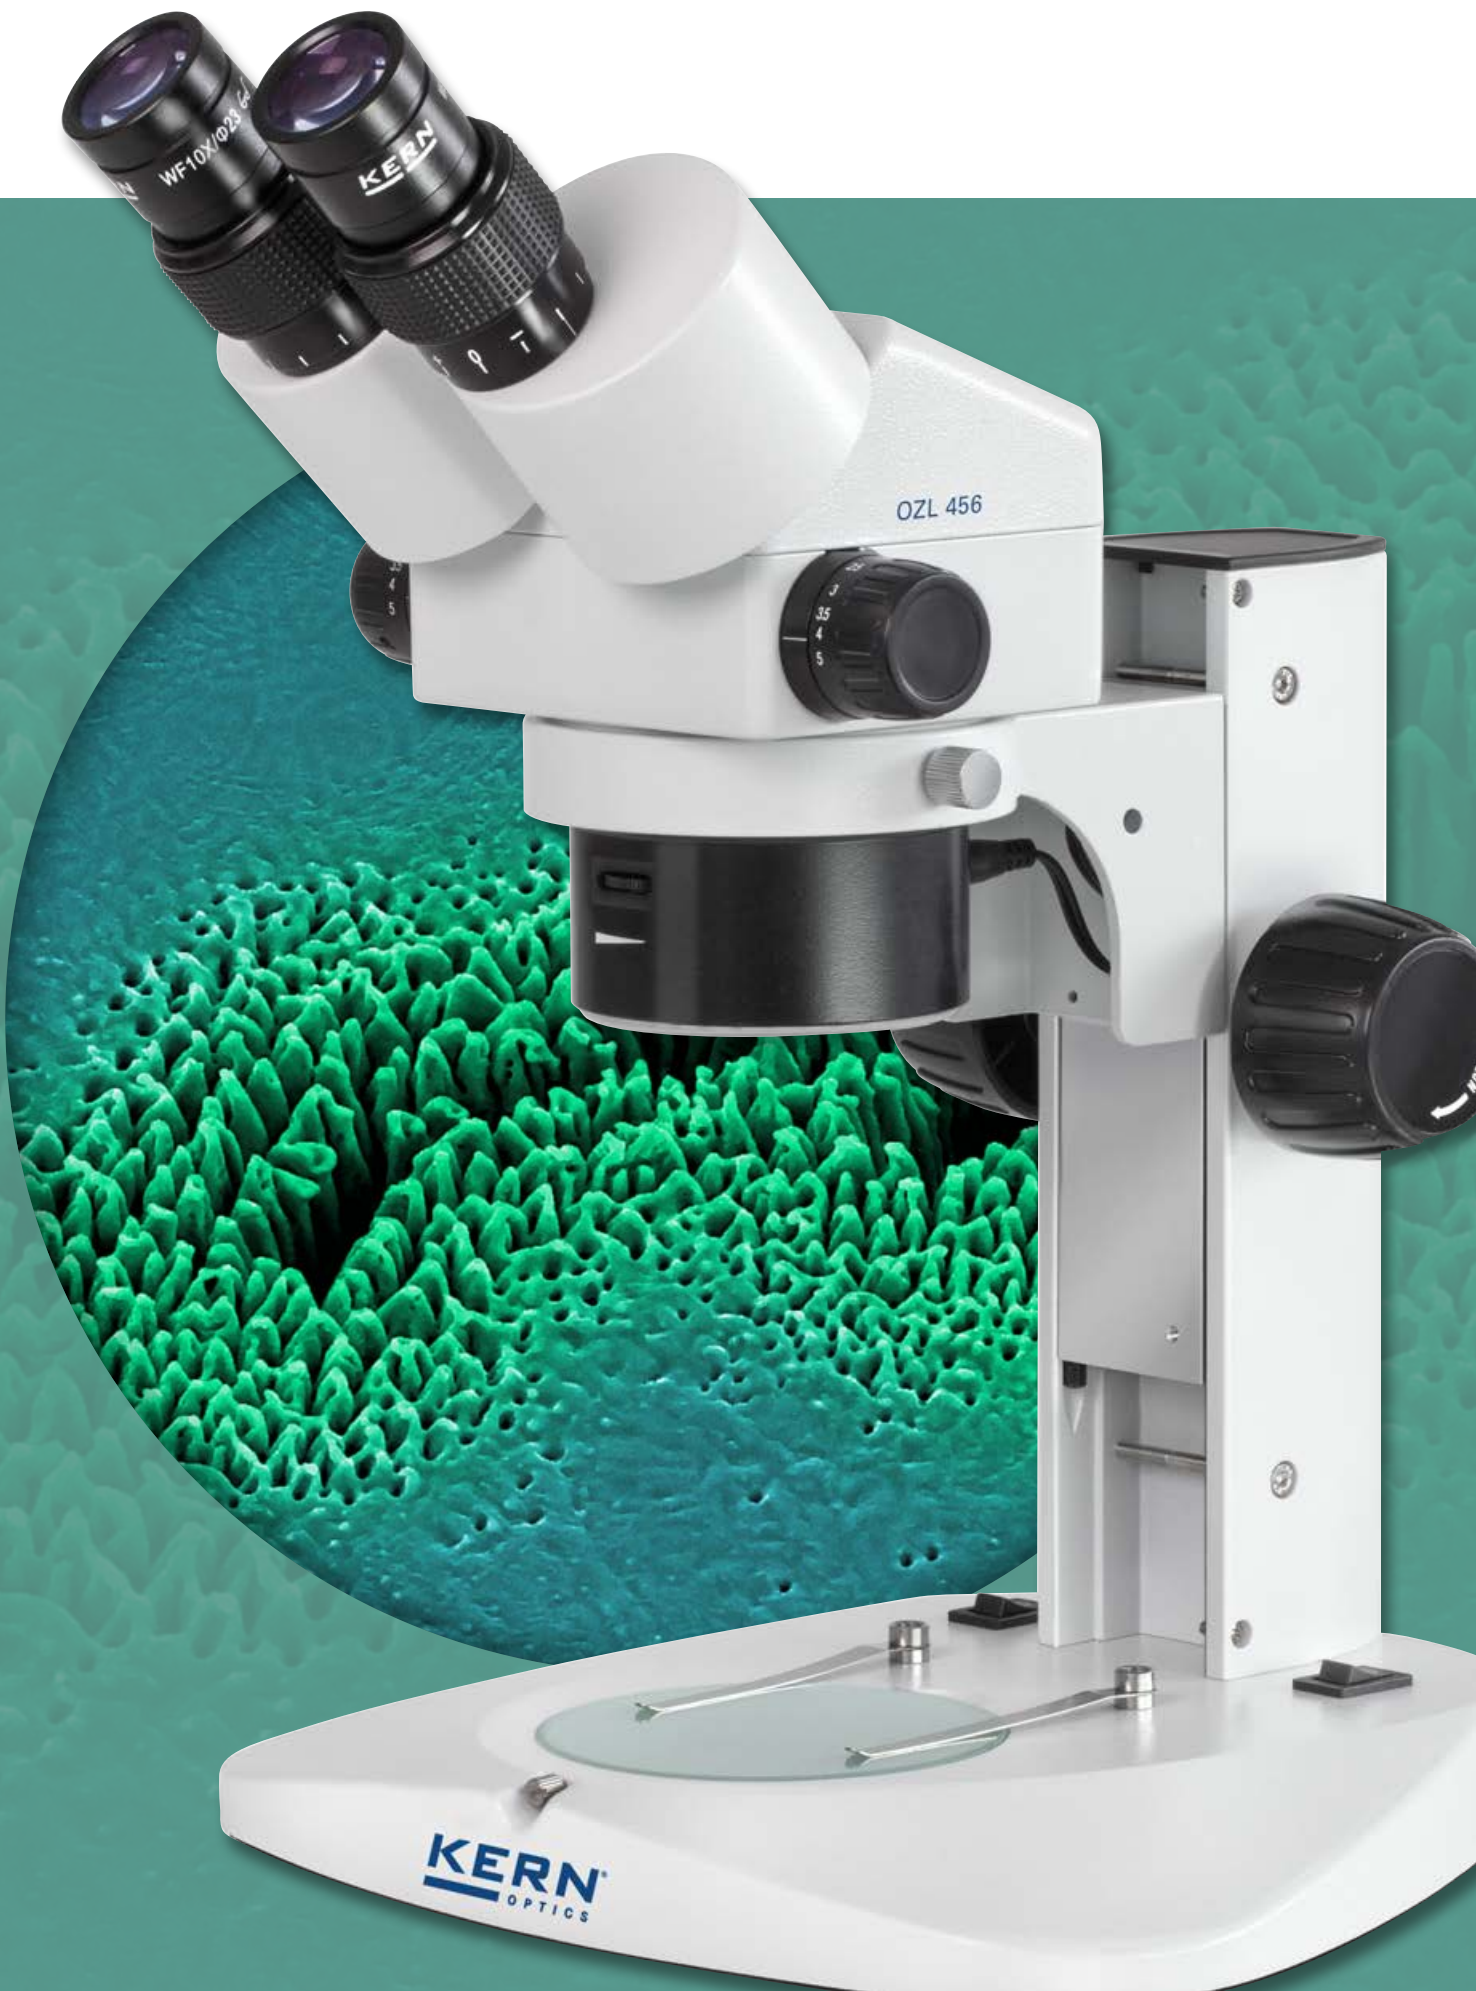

Stereomicroscope KERN OSE-4



OSE 416



With white stage plate



With black stage plate

4

EDUCATIONAL LINE

The small robust model for school, training establishment or workshops

Features

- The KERN OSE-4 is an extremely robust, stable stereo microscope which is easy to use, it is ideal for all conventional applications in schools, workshops and training companies.
- Depending on the model, optional LED reflected illumination as well as transmitted and reflected illumination ensure the very best illumination of your sample.
- Despite its low price it has very good optical characteristics, which enable you to have sharp images over a large field of view.
- A turnable objective with predefined magnifications is available to make your working procedures quicker and more efficient.
- The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost.
- A special feature of this adaptable and yet robust microscope series is the stable mechanism of the microscope stand which can be adjusted precisely. It will also impress you with its functionality and ergonomic design.
- A large selection of eyepieces as well as various additional external illumination units are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Training, in vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Tube 45° inclined
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 230×130×330 mm
- Net weight approx. 2 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective	Stand	Illumination	
OSE 410	Binocular	WF 10×/ø 20 mm	ø 20	1×/3×	Pillar style	-	220,-
OSE 411	Binocular	WF 10×/ø 20 mm	ø 20	2×/4×	Pillar style	-	220,-
OSE 413	Binocular	WF 10×/ø 20 mm	ø 20	1×/3×	Pillar style	0,21 W LED (incident)	250,-
OSE 414	Binocular	WF 10×/ø 20 mm	ø 20	2×/4×	Pillar style	0,21 W LED (incident)	250,-
OSE 416	Binocular	WF 10×/ø 20 mm	ø 20	1×/3×	Pillar style	0,21 W LED (incident); 0,21 W LED (transmitted)	255,-
OSE 417	Binocular	WF 10×/ø 20 mm	ø 20	2×/4×	Pillar style	0,21 W LED (incident); 0,21 W LED (transmitted)	255,-

Stereomicroscope KERN OSE-4

Eyepiece	Specifications – Objectives				
	Magnification	1×	2×	3×	4×
WF 5×	Total magnification	5×	10×	15×	20×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 15	∅ 7,5	∅ 5	∅ 3,7
WF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 10	∅ 6,5	∅ 4,3	∅ 3,2
Working distance		57 mm	57 mm	57 mm	57 mm

Model outfit		Model KERN						Order number	Price/piece excl. of VAT ex works €
		OSE 410	OSE 411	OSE 413	OSE 414	OSE 416	OSE 417		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○	○	○	○	○	○	OZB-A4101	35,-
	WF 10×/∅ 20 mm	✓	✓	✓	✓	✓	✓	OZB-A4102	30,-
	WF 15×/∅ 15 mm	○	○	○	○	○	○	OZB-A4103	30,-
	WF 20×/∅ 10 mm	○	○	○	○	○	○	OZB-A4104	35,-
Stand	Pillar style, without illumination	✓	✓						
	Pillar style, with 0,21 W LED illumination (incident)			✓	✓				
	Pillar style, with 0,21 W LED illumination (transmission + incident)					✓	✓		
Stage plate	Black-white/∅ 59,5 mm	✓	✓	✓	✓			OZB-A4816	19,-
	Frosted glass/∅ 95 mm					✓	✓	OZB-A4805	19,-
	Black-white/∅ 95 mm					✓	✓	OZB-A4806	19,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com								

✓ = Included with delivery

○ = Option

Stereomicroscope KERN OSF-4



OSF 430



OSF 435

4

EDUCATIONAL LINE

Stereo microscope with robust, ergonomic design, ideal for workshops, schools and training

Features

- The KERN OSF-4 stands out through its ergonomic construction and its superb arm curved stand. This ensures precise adjustment and focusing of your sample.
- The LED reflected and transmitted illumination included as standard guarantees the very best illumination of your sample.
- As well as very good optical characteristics, its flat working surface means that it offers the highest level of convenience in this class.
- A turnable objective with up to three predefined magnifications is available to make your working procedures quicker and more efficient.
- The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost.
- Depending on the model, the arm curved stand has a coarse focusing knob (OSF 430, OSF 431) or a coarse and fine focusing knob (OSF 434, OSF 435). The ergonomic shape and the stable mechanism which can be adjusted extremely accurately offer a high level of functionality and enable you to work quickly and efficiently with very little effort.
- A large selection of eyepieces as well as various additional external illumination units are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Training, in vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control


Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Tube 45° inclined
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 230×140×340 mm
- Net weight approx. 2,5 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective	Stand	Illumination	
KERN							
OSF 430	Binocular	WF 10×/ø 20 mm	ø 20	1×/3×	Arm curved	1 W LED (incident); 0,21 W LED (transmitted)	325,-
OSF 431	Binocular	WF 10×/ø 20 mm	ø 20	2×/4×	Arm curved	1 W LED (incident); 0,21 W LED (transmitted)	325,-
OSF 434	Binocular	WF 10×/ø 20 mm	ø 20	1×/2×/3×	Arm curved, fine focus	1 W LED (incident); 0,21 W LED (transmitted)	360,-
OSF 435	Binocular	WF 10×/ø 20 mm	ø 20	1×/2×/4×	Arm curved, fine focus	1 W LED (incident); 0,21 W LED (transmitted)	360,-

Stereomicroscope KERN OSF-4

Eyepiece	Specifications – Objectives				
	Magnification	1×	2×	3×	4×
WF 5×	Total magnification	5×	10×	15×	20×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 15	∅ 7,5	∅ 5	∅ 3,7
WF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 10	∅ 6,5	∅ 4,3	∅ 3,2
Working distance		100 mm	100 mm	100 mm	100 mm

Model outfit		Model KERN				Order number	Price/piece excl. of VAT ex works €
		OSF 430	OSF 431	OSF 434	OSF 435		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○	○	○	○	OZB-A4101	35,-
	WF 10×/∅ 20 mm	✓✓	✓✓	✓✓	✓✓	OZB-A4102	30,-
	WF 15×/∅ 15 mm	○	○	○	○	OZB-A4103	30,-
	WF 20×/∅ 10 mm	○	○	○	○	OZB-A4104	35,-
Auxiliary objective	Soldering protection lens	✓	✓	✓	✓	OZB-A4250	19,-
Stand	Arm curved, with LED illumination (0,21 W transmitted + 1 W incident)	✓	✓				
	Arm curved, incl. fine adjustment, with LED illumination (0,21 W transmitted + 1 W incident)			✓	✓		
Stage plate	Frosted glass/∅ 74,5 mm	✓	✓	✓	✓	OZB-A4813	19,-
	Black-white/∅ 74,5 mm	✓	✓	✓	✓	OZB-A4814	19,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com						

✓ = Included with delivery

○ = Option

Stereomicroscope KERN OSF-4G



Stage plate black



Stage plate white

4

EDUCATIONAL LINE

The practical and robust product for schools, training centres, the workshop and laboratory

Features

- With its integrated handle as well as its stable arm curved stand, the KERN OSF-4G has been specially developed for schools and workshops.
- The LED reflected and transmitted illumination included as standard guarantees the very best, continuously dimmable illumination of your sample.
- As well as very good optical characteristics, its ergonomic working surface means that it offers the highest level of convenience in this class.
- A turnable objective with three predefined magnifications is available to make your working procedures quicker and more effective.
- The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost.
- The ergonomic shape and the stable mechanism which can be adjusted extremely accurately offer a high level of functionality and enable you to work quickly and efficiently with very little effort.
- A large selection of eyepieces as well as various additional external illumination units are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Training, in vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 230×180×275 mm
- Net weight approx. 2,5 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective	Stand	Illumination	
KERN OSF 438	Binocular	WF 10×/ø 20 mm	ø 20	1×/2×/3×	Arm curved	1 W LED (incident); 0,35 W LED (transmitted)	325,-
OSF 439	Binocular	WF 10×/ø 20 mm	ø 20	1×/2×/4×	Arm curved	1 W LED (incident); 0,35 W LED (transmitted)	325,-

Stereomicroscope KERN OSF-4G

Eyepiece	Specifications – Objectives				
	Magnification	1×	2×	3×	4×
WF 5×	Total magnification	5×	10×	15×	20×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 15	∅ 7,5	∅ 5	∅ 3,7
WF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 10	∅ 6,5	∅ 4,3	∅ 3,2
Working distance		57 mm	57 mm	57 mm	57 mm

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OSF 438	OSF 439		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○ ○	○ ○	OZB-A4101	35,-
	WF 10×/∅ 20 mm	✓ ✓	✓ ✓	OZB-A4102	30,-
	WF 15×/∅ 15 mm	○ ○	○ ○	OZB-A4103	30,-
	WF 20×/∅ 10 mm	○ ○	○ ○	OZB-A4104	35,-
Stand	Arm curved, incl. handle, with LED illumination (0,35 W transmitted + 1 W incident)	✓	✓		
Stage plate	Frosted glass/∅ 59,5 mm	✓	✓	OZB-A4815	19,-
	Black-white/∅ 59,5 mm	✓	✓	OZB-A4816	19,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com				

✓ = Included with delivery

○ = Option

Stereomicroscope KERN OSF-5



OSF 527



OSF 526

4

EDUCATIONAL LINE

High level of quality, strong illumination and a high level of flexibility, for schools, training workshops and laboratories

Features

- The KERN OSF-5 series stands out because of its modular construction and flexible pole stands. Due to its robust design it is also ideal for use in harsh working environments.
- Depending on the model, you have the choice of reflected and transmitted illumination variants with 3 W LED (continuously dimmable) or a variant without a light source.
- The high-quality optics, together with a large working surface offers the highest level of comfort for your applications.
- A turnable objective with two predefined magnifications is available to make your working procedures quicker and more effective.
- The large eyepieces with a field of view of 23 mm give you the very best and most comfortable microscope use over several hours.
- The pillar stand not only gives you the highest level of flexibility when working under the microscope, but also the option of removing the microscope head and integrating this into other modular construction systems, for example into a universal stand.
- A large selection of eyepieces, (universal) stands, a darkfield kit as well as a mechanical stage extension are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- Training, zoology and botany, quality control


Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 310×285×400 mm
- Net weight approx. 3,5 kg

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective	Stand	Illumination	
KERN OSF 522	Binocular	HSWF 10×/ø 23 mm	ø 23	1×/2×	Pillar style	-	520,-
OSF 523	Binocular	HSWF 10×/ø 23 mm	ø 23	1×/2×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	730,-
OSF 524	Binocular	HSWF 10×/ø 23 mm	ø 23	1×/3×	Pillar style	-	520,-
OSF 525	Binocular	HSWF 10×/ø 23 mm	ø 23	1×/3×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	730,-
OSF 526	Binocular	HSWF 10×/ø 23 mm	ø 23	2×/4×	Pillar style	-	520,-
OSF 527	Binocular	HSWF 10×/ø 23 mm	ø 23	2×/4×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	730,-

Stereomicroscope KERN OSF-5

Eyepiece	Specifications – Objectives				
	Magnification	1×	2×	3×	4×
HSWF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 23	∅ 11,5	∅ 7,67	∅ 5,75
SWF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 17	∅ 8,5	∅ 5,67	∅ 4,25
SWF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 14	∅ 7	∅ 4,67	∅ 3,5
SWF 30×	Total magnification	30×	60×	90×	120×
	Field of view mm	∅ 9	∅ 4,5	∅ 3	∅ 2,25
Working distance		105 mm	105 mm	105 mm	105 mm

Model outfit		Model KERN						Order number	Price/piece excl. of VAT ex works €
		OSF 522	OSF 523	OSF 524	OSF 525	OSF 526	OSF 527		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	OZB-A5503	60,-
	SWF 15×/∅ 17 mm	○	○	○	○	○	○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○	○	○	○	○	○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○	○	○	○	○	○	OZB-A5506	85,-
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	○	○	○	○	OZB-A5512	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	○	○	○	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	○	○	○	○	OZB-A5514	110,-
Darkfield unit	Darkfield unit	○	○	○	○	○	○	OZB-A4601	70,-
Object clamp	Object clamp	○	○	○	○	○	○	OBB-A6205	35,-
Stand	Pillar style, without illumination	✓		✓		✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		✓		✓		
	Please find more stands in the catalogue on page 78 and on our website www.kern-sohn.com								
Stage plate	Frosted glass/∅ 94,5 mm		✓		✓		✓	OZB-A5192	19,-
	Black-white/∅ 94,5 mm	✓	✓	✓	✓	✓	✓	OZB-A5191	19,-
	Glass/∅ 94,5 mm		○		○		○	OZB-A5190	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for transmitted and incident illumination	○	○	○	○	○	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm; Travel 100×86 mm, for incident illumination only	○	○	○	○	○	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com								

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZL-44



OZL 445

4

LAB LINE

The affordable and flexible stereo zoom microscope for laboratories, inspection authorities and quality controls

Features

- The products in the KERN OZL-44 series are stereo zoom microscopes, which will impress you with their easy handling, flexibility as well as their stability and economical price.
- The LED reflected and transmitted illumination included as standard guarantees the very best illumination of your sample.
- As well as excellent optical characteristics and their large working surface, these models offer the highest level of comfort in this class – ideal for training companies, workshops as well as assembly and repair workstations, e.g. in the electronics industry.
- Depending on the model, the zoom objective gives you either continuous magnification of 10× – 40× (OZL 441) or continuous magnification of 7,5× – 36× (OZL 445).
- The OZL-44 series is available as a binocular or trinocular version. The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost.
- The pillar stand offers you the highest level of flexibility and the freedom to remove the microscope head and to integrate it into other modular systems, for example into a universal stand.
- A large selection of eyepieces, external illumination units as well as auxiliary objectives are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control


Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio OZL 441: 4:1
- Magnification ratio OZL 445: 4,8:1
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×235×380 mm
- Net weight approx. 5 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
OZL 441 *	Trinocular	WF 10×/ø 22 mm	ø 23 – 5,5	1× – 4×	Pillar style	1 W LED (incident); 0,35 W LED (transmitted)	570,-
OZL 445	Binocular	HWF 10×/ø 21,5 mm	ø 28 – 6	0,75× – 3,6×	Pillar style	1 W LED (incident); 0,35 W LED (transmitted)	410,-

* ONLY WHILE STOCKS LAST

Stereo zoom microscope KERN OZL-44

OZL 44 1		Specifications - Objectives				
Eyepiece	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,75×	1,5×	2,0×
WF 5×	Total magnification	5× - 20×	2,5× - 10×	3,75× - 15×	7,5× - 30×	10× - 40×
	Field of view mm	∅ 20 - 5	∅ 40 - 11	∅ 25 - 6,5	∅ 13 - 3,5	∅ 10 - 2,5
WF 10×	Total magnification	10× - 40×	5× - 20×	7,5× - 30×	15× - 60×	20× - 80×
	Field of view mm	∅ 23 - 5,5	∅ 52 - 12	∅ 30 - 7	∅ 15 - 4,8	∅ 11,5 - 3
WF 15×	Total magnification	15× - 60×	7,5× - 30×	11,25× - 45×	22,5× - 90×	30× - 120×
	Field of view mm	∅ 15,5 - 4	∅ 36 - 8,5	∅ 21 - 5	∅ 10,5 - 2,5	∅ 8 - 2
WF 20×	Total magnification	20× - 80×	10× - 40×	15× - 60×	30× - 120×	40× - 160×
	Field of view mm	∅ 10,5 - 3	∅ 25 - 5,8	∅ 14 - 3,5	∅ 7 - 1,8	∅ 5,5 - 1,5
Working distance		91 mm	170 mm	100 mm	42 mm	28 mm

OZL 44 5		Specifications - Objectives				
Eyepiece	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,75×	1,5×	2,0×
WF 5×	Total magnification	3,75× - 18×	1,875× - 9×	2,81× - 13,5×	5,625× - 27×	7,5× - 36×
	Field of view mm	∅ 26 - 6	∅ 60 - 13	∅ 32 - 7	∅ 16 - 4	∅ 12,5 - 3
HWF 10×	Total magnification	7,5× - 36×	3,75× - 18×	5,625× - 27×	11,25× - 54×	15× - 72×
	Field of view mm	∅ 28 - 6	∅ 63 - 14	∅ 35 - 8	∅ 18 - 4	∅ 14 - 3
WF 15×	Total magnification	11,25× - 54×	5,625× - 27×	8,44× - 40,5×	16,875× - 81×	22,5× - 108×
	Field of view mm	∅ 19 - 4,5	∅ 43 - 9,5	∅ 24 - 5,5	∅ 12 - 3	∅ 9,5 - 2
WF 20×	Total magnification	15× - 72×	7,5× - 36×	56,25× - 54×	22,5× - 108×	30× - 144×
	Field of view mm	∅ 12,5 - 3	∅ 28 - 6	∅ 16 - 3,5	∅ 8 - 2	∅ 6 - 1,5
Working distance		86 mm	178 mm	96 mm	42,5 mm	25,5 mm

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OZL 44 1	OZL 44 5		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○ ○	○ ○	OZB-A4101	35,-
	WF 10×/∅ 22 mm	✓ ✓		OZB-A4105	35,-
	HWF 10×/∅ 21,5 mm		✓ ✓	OZB-A4106	35,-
	WF 15×/∅ 15 mm	○ ○	○ ○	OZB-A4103	30,-
	WF 20×/∅ 10 mm	○ ○	○ ○	OZB-A4104	35,-
Auxiliary objectives	0,5×	○	○	OZB-A4201	75,-
	0,75×	○	○	OZB-A4202	75,-
	1,5×	○	○	OZB-A4204	75,-
	2,0×	○	○	OZB-A4205	80,-
	Soldering protection lens	○	○	OZB-A4250	19,-
C-Mount	1× (focus adjustable)	○		OZB-A4809	65,-
	0,3× (focus adjustable)	○		OZB-A4810	85,-
	0,5× (focus adjustable)	○		OZB-A4811	100,-
Stand	Pillar style, with LED illumination (0,35 W transmitted + 1 W incident)	✓	✓		
Stage plate	Frosted glass/∅ 95 mm	✓	✓	OZB-A4805	19,-
	Black-white/∅ 95 mm	✓	✓	OZB-A4806	19,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com				

✓ = Included with delivery

○ = Option

NEW



4

LAB LINE

The flexible, affordable all-rounder with zoom function for schools, training companies, inspection authorities and laboratories

Features

- The products in the KERN OZL-46 series are stereo zoom microscopes, which will impress you with their quality, easy handling, flexibility as well as their stability and economical price.
- The LED reflected and transmitted illumination included as standard guarantees the very best illumination of your sample.
- As well as excellent optical characteristics and their large working surface, these models offer the highest level of comfort in this class – ideal for training companies, workshops as well as assembly and repair workstations, e.g. in the electronics industry.
- The zoom objective offers you continuous magnification from 7×–45×.
- The KERN OZL-46 series is available as a binocular or trinocular version.
- The pillar stand offers you the highest level of flexibility and the freedom to remove the microscope head and to integrate it into other modular systems, for example into a universal stand.
- A large selection of eyepieces, external illumination units as well as auxiliary objectives are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control


Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 6,4:1
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 300×240×420 mm
- Net weight approx. 4 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZL 463	Binocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Pillar style	1 W LED (incident); 1 W LED (transmitted)	560,-
OZL 464	Trinocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Pillar style	1 W LED (incident); 1 W LED (transmitted)	630,-

Stereo zoom microscope KERN OZL-46

Eyepiece	Specifications - Objectives				
	Magnification	Standard 1,0×	Auxiliary objectives		
			0,5×	1,5×	2,0×
HSWF 10×	Total magnification	7× - 45×	3,5× - 22,5×	10,5× - 67,5×	14× - 90×
	Field of view mm	∅ 28,6 - 4,4	∅ 57,1 - 8,9	∅ 19 - 3	∅ 14,3 - 2,2
HWF 15×	Total magnification	10,5× - 67,5×	5,3× - 33,8×	15,5× - 101,3×	21× - 135×
	Field of view mm	∅ 21,4 - 3,3	∅ 42,9 - 6,7	∅ 14,3 - 2,2	∅ 10,7 - 1,7
HSWF 20×	Total magnification	14× - 90×	7× - 45×	21× - 135×	28× - 180×
	Field of view mm	∅ 14,3 - 2,2	∅ 28,6 - 4,4	∅ 9,5 - 1,5	∅ 7,1 - 1,1
HWF 25×	Total magnification	17,5× - 122,5×	8,8× - 56,3×	26,3× - 168,8×	35× - 225×
	Field of view mm	∅ 12,9 - 2,0	∅ 25,7 - 4,0	∅ 8,6 - 1,3	∅ 6,4 - 1,0
Working distance		105 mm	177 mm	47 mm	26 mm

4

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OZL 463	OZL 464		
Eyepieces (30,0 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OZB-A4631	40,-
	HSWF 15×/∅ 15 mm	○○	○○	OZB-A4632	50,-
	HWF 20×/∅ 10 mm	○○	○○	OZB-A4633	50,-
	HSWF 25×/∅ 9 mm	○○	○○	OZB-A4634	55,-
Auxiliary objectives	0,5×	○	○	OZB-A4641	80,-
	1,5×	○	○	OZB-A4642	80,-
	2,0×	○	○	OZB-A4643	80,-
C-Mount	1× (focus adjustable)		○	OZB-A4809	65,-
	0,3× (focus adjustable)		○	OZB-A4810	85,-
	0,5× (focus adjustable)		○	OZB-A4811	100,-
Stand	Pillar style, with 1 W-LED illumination (transmitted + incident)	✓	✓		
Stage plate	Frosted glass/∅ 95 mm	✓		OZB-A4805	19,-
	Black-white/∅ 95 mm	✓	✓	OZB-A4806	19,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com				

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZL-45



OZL 451



OZL 453

4

LAB LINE

Stereo zoom microscope with or without halogen illumination, for the laboratory, training centres, quality control or agriculture

Features

- The KERN OZL-45 stereo zoom microscope series will impress you with its excellent optical characteristics, easy operation and high level of ergonomic working comfort.
- You have the choice of a model with a strong, continuously dimmable halogen reflected and transmitted illumination unit or a model without an integrated light source.
- The high-quality optics, together with a large working surface offers the highest level of comfort for your applications.
- The zoom objective offers you continuous magnification from 7,5×–50×.
- The KERN OZL-45 series is available as a binocular version.
- The pillar stand offers you the highest level of flexibility and the freedom to remove the microscope head and to integrate it into other modular systems, for example into a universal stand.

- A large selection of eyepieces, external illumination units as well as auxiliary objectives are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable
- Tube 45° inclined
- Magnification ratio: 6,7:1
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: Both-sided

OZL 451

- Overall dimensions W×D×H 330×270×460 mm
- Net weight approx. 5 kg

OZL 453

- Overall dimensions W×D×H 315×285×470 mm
- Net weight approx. 4,5 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZL 451	Binocular	HSWF 10×/ø 23 mm	ø 33 – 5	0,75× – 5,0×	Pillar style	12 V/10 W Halogen (incident) 12 V/10 W Halogen (transmitted)	580,-
OZL 453	Binocular	HSWF 10×/ø 23 mm	ø 33 – 5	0,75× – 5,0×	Pillar style	–	540,-

Stereo zoom microscope KERN OZL-45

Eyepiece	Specifications - Objectives				
	Magnification	Standard 1,0×	Auxiliary objectives		
			0,5×	1,5×	2,0×
HWF 5×	Total magnification	3,75× - 25×	1,875× - 12,5×	5,625× - 37,5×	7,5× - 50×
	Field of view mm	∅ 31 - 4,6	∅ 61,3 - 9,2	∅ 22 - 3,3	∅ 16 - 2,5
HSWF 10×	Total magnification	7,5× - 50×	3,75× - 25×	11,25× - 75×	15× - 100×
	Field of view mm	∅ 33 - 5	∅ 65 - 10	∅ 22 - 3,3	∅ 16 - 2,5
HWF 15×	Total magnification	11,25× - 75×	5,625× - 37,5×	16,875× - 112,5×	22,5× - 150×
	Field of view mm	∅ 24 - 4,2	∅ 48 - 8,5	∅ 16 - 2,8	∅ 12 - 2
HSWF 20×	Total magnification	15× - 100×	7,5× - 50×	22,5× - 150×	30× - 200×
	Field of view mm	∅ 20 - 3,5	∅ 40 - 7	∅ 13,3 - 2,3	∅ 10 - 1,8
HWF 25×	Total magnification	18,75× - 125×	9,375× - 62,5×	28,125× - 187,5×	37,5× - 255×
	Field of view mm	∅ 15,8 - 2,4	∅ 31,5 - 4,8	∅ 10,5 - 1,6	∅ 7,9 - 1,2
Working distance		113 mm	220 mm	50 mm	35 mm

4

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OZL 451	OZL 453		
Eyepieces (30,0 mm)	HWF 5×/∅ 23,2 mm	○ ○	○ ○	OZB-A4112	40,-
	HSWF 10×/∅ 23 mm	✓ ✓	✓ ✓	OZB-A4118	40,-
	HWF 15×/∅ 15 mm	○ ○	○ ○	OZB-A4119	40,-
	HSWF 20×/∅ 14,5 mm	○ ○	○ ○	OZB-A4120	60,-
	HWF 25×/∅ 11,7 mm	○ ○	○ ○	OZB-A4121	60,-
Auxiliary objectives	0,5×	○	○	OZB-A4201	75,-
	1,5×	○	○	OZB-A4204	75,-
	2,0×	○	○	OZB-A4206	115,-
Stand	Pillar style, with 12 V/ 10 W Halogen Illumination (transmitted + incident)	✓			
	Pillar style, without illumination		✓		
Stage plate	Frosted glass/∅ 95 mm	✓		OZB-A4805	19,-
	Black-white/∅ 95 mm	✓	✓	OZB-A4806	19,-
Illumination	12 V/ 10 W spare bulb (transmitted + incident)	✓		OZB-A4804	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 180×155 mm, Travel 75×55 mm, for transmitted and incident illumination	○	○	OZB-A4605	235,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com				

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZL-45R



4

LAB LINE

The practical and flexible stereo zoom microscope with integrated LED ring illumination and large zoom range

Features

- The KERN OZL-456 stereo zoom microscope series will impress you with its excellent optical characteristics, easy operation and its integrated LED ring illumination unit.
- The highlight of the KERN OZL-456 is the strong, continuously dimmable, integrated LED ring illumination in the objective housing, which ensures uniform, shadow-free illumination. An LED transmitted light variant is also included.
- With its built-in, top-quality optics and powerful, integrated LED illumination unit, this model is a special all-rounder for all areas of application.
- The zoom objective offers you continuous magnification from 7,5× – 50×.
- As standard, the KERN OZL-45R series is provided as a binocular version with 10× eyepieces with a field of view with a diameter of 23 mm.
- The arm curved stand gives you a large working area as well as a precise adjustment mechanism.
- A large selection of eyepieces as well as auxiliary objectives are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Transmitted illumination dimmable
- Tube 45° inclined
- Magnification ratio: 6,7:1
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 320×275×420 mm
- Net weight approx. 4,5 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZL 456	Binocular	HSWF 10×/ø 23 mm	ø 33 – 5	0,75× – 5,0×	Arm curved	1 W LED (incident); 0,21 W LED (transmitted)	660,-

Stereo zoom microscope KERN OZL-45R

Eyepiece	Specifications - Objectives			
	Magnification	Standard 1,0×	Auxiliary objectives	
			1,5×	2,0×
HWF 5×	Total magnification	3,75× - 25×	5,625× - 37,5×	7,5× - 50×
	Field of view mm	∅ 31 - 4,6	∅ 22 - 3,3	∅ 16 - 2,5
HSWF 10×	Total magnification	7,5× - 50×	11,25× - 75×	15× - 100×
	Field of view mm	∅ 33 - 5	∅ 22 - 3,3	∅ 16 - 2,5
HWF 15×	Total magnification	11,25× - 75×	16,875× - 112,5×	22,5× - 150×
	Field of view mm	∅ 24 - 4,2	∅ 16 - 2,8	∅ 12 - 2
HSWF 20×	Total magnification	15× - 100×	22,5× - 150×	30× - 200×
	Field of view mm	∅ 20 - 3,5	∅ 13,3 - 2,3	∅ 10 - 1,8
HWF 25×	Total magnification	18,75× - 125×	28,125× - 187,5×	37,5× - 255×
	Field of view mm	∅ 15,8 - 2,4	∅ 10,5 - 1,6	∅ 7,9 - 1,2
Working distance		113 mm	50 mm	35 mm

4

Model outfit		Model KERN	Order number	Price/piece excl. of VAT ex works €
		OZL 456		
Eyepieces (30,0 mm)	HWF 5×/∅ 23,2 mm	○ ○	OZB-A4112	40,-
	HSWF 10×/∅ 23 mm	✓ ✓	OZB-A4118	40,-
	HWF 15×/∅ 15 mm	○ ○	OZB-A4119	40,-
	HSWF 20×/∅ 14,5 mm	○ ○	OZB-A4120	60,-
	HWF 25×/∅ 11,7 mm	○ ○	OZB-A4121	60,-
Auxiliary objectives	1,5×	○	OZB-A4204	75,-
	2,0×	○	OZB-A4206	115,-
Stand	Arm curved, with LED illumination (0,21 W transmitted + 1 W incident)	✓		
Stage plate	Frosted glass/∅ 95 mm	✓	OZB-A4805	19,-
	Black-white/∅ 95 mm	✓	OZB-A4806	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 180×155 mm, Travel 75×55 mm, for transmitted and incident illumination	○	OZB-A4605	235,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com			

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZM-5



OZM 544



OZM 541

4

LAB LINE

First-class optics and strong illumination combined with a high level of flexibility

Features

- The KERN OZM series is a range of excellent stereo zoom microscopes with above-average optical features.
- The ergonomic shape allows a simple, effortless working over a period of several hours.
- The extraordinarily strong and continuously dimmable 3 W LED reflected and transmitted illumination ensures a flexible and particularly good level of illumination for your sample.
- With its large working distance, an extra large field of view and its brilliant resolution, the KERN OZM provides sharp, high-contrast, colour-true images.
- The zoom objective gives you continuous magnification from 7,5×–45×.
- There is a choice of two binocular models as well as three trinocular models for connecting a camera for documentation purposes and for quality reports. For both variants you have the choice of models with or without illumination.
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures.
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 6,4:1
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×285×440 mm
- Net weight approx. 4,5 kg

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZM 541	Binocular	HSWF 10×/ø 23 mm	ø 32,8 – 5,1	0,7× – 4,5×	Pillar style	–	860,-
OZM 542	Binocular	HSWF 10×/ø 23 mm	ø 32,8 – 5,1	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	1070,-
OZM 543	Trinocular	HSWF 10×/ø 23 mm	ø 32,8 – 5,1	0,7× – 4,5×	Pillar style	–	1150,-
OZM 544	Trinocular	HSWF 10×/ø 23 mm	ø 32,8 – 5,1	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	1350,-

Stereo zoom microscope KERN OZM-5

Eyepiece	Specifications - Objectives						
	Magnification	Standard 1,0×	Auxiliary objectives				
			0,37×	0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	7× - 45×	2,59× - 16,65×	3,5× - 22,5×	4,9× - 31,5×	10,5× - 67,5×	14× - 90×
	Field of view mm	∅ 32,8 - 5,1	∅ 88,8 - 13,8	∅ 65,7 - 10,2	∅ 46,9 - 7,3	∅ 21,9 - 3,4	∅ 16,4 - 2,6
SWF 15×	Total magnification	10,5× - 67,5×	3,89× - 25×	5,3× - 33,8×	7,4× - 47,2×	15,8× - 101,3×	21× - 135×
	Field of view mm	∅ 24,3 - 3,8	∅ 65,6 - 10,2	∅ 48,6 - 7,6	∅ 34,7 - 5,4	∅ 16,2 - 2,5	∅ 12,1 - 1,9
SWF 20×	Total magnification	14× - 90×	5,18× - 33,3×	7× - 45×	9,8× - 63×	21× - 135×	28× - 180×
	Field of view mm	∅ 20 - 3,1	∅ 54,1 - 8,4	∅ 40 - 6,2	∅ 28,6 - 4,4	∅ 13,3 - 2,1	∅ 10 - 1,6
SWF 30×	Total magnification	21× - 135×	7,77× - 50×	10,5× - 67,5×	14,7× - 94,5×	31,5× - 202,5×	42× - 270×
	Field of view mm	∅ 12,9 - 2	∅ 34,7 - 5,4	∅ 25,7 - 4	∅ 18,4 - 2,9	∅ 8,6 - 1,6	∅ 6,4 - 1
Working distance		110 mm	275 mm	195 mm	145 mm	50 mm	35 mm

Model outfit	Model KERN				Order number	Price/piece excl. of VAT ex works €	
	OZM 541	OZM 542	OZM 543	OZM 544			
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	✓✓	✓✓	OZB-A5503	60,-
	SWF 15×/∅ 17 mm	○	○	○	○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○	○	○	○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○	○	○	○	OZB-A5506	85,-
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	○	○	OZB-A5512	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5514	110,-
Achromatic auxiliary objectives	0,37× only in combination with a universal stand	○	○	○	○	OZB-A5611	135,-
	0,5×	○	○	○	○	OZB-A5612	120,-
	0,7×	○	○	○	○	OZB-A5613	120,-
	1,5×	○	○	○	○	OZB-A5615	120,-
	2,0×	○	○	○	○	OZB-A5616	120,-
	Soldering protection lens	○	○	○	○	OZB-A5614	45,-
C-Mount	0,3× (focus adjustable)			○	○	OZB-A5701	120,-
	0,5× (focus adjustable)			○	○	OZB-A5702	120,-
	1,0× (focus adjustable)			○	○	OZB-A5703	95,-
	1,0× (with micrometer) only in combination with OZB-A5703			○	○	OZB-A5704	255,-
	for SLR cameras (Nikon)			○	○	OZB-A5706	255,-
	for SLR cameras (Olympus)			○	○	OZB-A5707	255,-
	for SLR cameras (Canon)			○	○	OZB-A5708	255,-
Darkfield unit	Darkfield unit	○	○	○	○	OZB-A4601	70,-
Object clamp	Object clamp	○	○	○	○	OBB-A6205	35,-
Stand	Pillar style, without illumination	✓		✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		✓		
	Please find more stands in the catalogue on page 78 and on our website www.kern-sohn.com						
Stage plate	Frosted glass/∅ 94,5 mm		✓		✓	OZB-A5192	19,-
	Black-white/∅ 94,5 mm	✓	✓	✓	✓	OZB-A5191	19,-
	Glass/∅ 94,5 mm		○		○	OZB-A5190	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for transmitted and incident illumination	○	○	○	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	○	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com						

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZO-5



4

LAB LINE

The high-contrast and flexible stereo zoom microscope for professional applications which require high levels of magnification

Features

- The KERN OZO series will stand out through its large magnification range in higher magnifications as well as its sturdy construction and the fact that it is easy to use.
- The ergonomic shape allows a simple, effortless working over a period of several hours.
- The KERN OZO series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination.
- With its large working distance, an extra large field of view and brilliant resolution, the KERN OZO provides sharp, high-contrast and colour-true images.
- The large, continuously adjustable magnification radius from 8 to 70 times magnification means that you can work quickly and efficiently.
- There is a choice of two binocular models as well as two trinocular models for connecting a camera for documentation purposes and for quality reports.
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures.
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Zoology and botany, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube: 35° inclined
- Magnification ratio: 8,8:1
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×285×470 mm
- Net weight approx. 4,5 kg

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZO 551	Binocular	HSWF 10×/ø 23 mm	ø 28,75 – 3,3	0,8× – 7×	Pillar style	–	1460,-
OZO 552	Binocular	HSWF 10×/ø 23 mm	ø 28,75 – 3,3	0,8× – 7×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	1670,-
OZO 553	Trinocular	HSWF 10×/ø 23 mm	ø 28,75 – 3,3	0,8× – 7×	Pillar style	–	1810,-
OZO 554	Trinocular	HSWF 10×/ø 23 mm	ø 28,75 – 3,3	0,8× – 7×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	2020,-

Stereo zoom microscope KERN OZO-5

Eyepiece	Specifications - Objectives						
	Magnification	Standard 1,0×	Auxiliary objectives				
			0,37×	0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	8× - 70×	2,96× - 25,9×	4× - 35×	5,6× - 49×	12× - 105×	16× - 140×
	Field of view mm	∅ 28,75 - 3,3	∅ 74,3 - 8,5	∅ 57,5 - 6,6	∅ 41,1 - 4,7	∅ 19,2 - 2,2	∅ 14,4 - 1,6
SWF 15×	Total magnification	12× - 105×	4,44× - 38,9×	6× - 52,5×	8,4× - 73,5×	18× - 157,5×	24× - 210×
	Field of view mm	∅ 21,25 - 2,4	∅ 57,4 - 6,6	∅ 42,5 - 4,9	∅ 30,4 - 3,5	∅ 14,2 - 1,6	∅ 10,6 - 1,2
SWF 20×	Total magnification	16× - 140×	5,92× - 51,8×	8× - 70×	11,2× - 98×	24× - 210×	32× - 280×
	Field of view mm	∅ 17,5 - 2	∅ 47,3 - 5,4	∅ 35 - 4	∅ 25 - 2,9	∅ 11,7 - 1,3	∅ 8,75 - 1
SWF 30×	Total magnification	24× - 210×	8,88× - 77,7×	12× - 105×	16,8× - 147×	36× - 315×	48× - 420×
	Field of view mm	∅ 11,25 - 1,3	∅ 30,4 - 3,5	∅ 22,5 - 2,6	∅ 16,1 - 1,8	∅ 7,5 - 0,9	∅ 5,625 - 0,6
Working distance		108 mm	275 mm	195 mm	145 mm	50 mm	35 mm

Model outfit	Model KERN				Order number	Price/piece excl. of VAT ex works €	
	OZO 551	OZO 552	OZO 553	OZO 554			
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	✓✓	✓✓	OZB-A5503	60,-
	SWF 15×/∅ 17 mm	○	○	○	○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○	○	○	○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○	○	○	○	OZB-A5506	85,-
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	○	○	OZB-A5512	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5514	110,-
Achromatic auxiliary objectives	0,37× only in combination with a universal stand	○	○	○	○	OZB-A5611	135,-
	0,5×	○	○	○	○	OZB-A5612	120,-
	0,7×	○	○	○	○	OZB-A5613	120,-
	1,5×	○	○	○	○	OZB-A5615	120,-
	2,0×	○	○	○	○	OZB-A5616	120,-
	Soldering protection lens	○	○	○	○	OZB-A5614	45,-
C-Mount	0,3× (focus adjustable)			○	○	OZB-A5701	120,-
	0,5× (focus adjustable)			○	○	OZB-A5702	120,-
	1,0× (focus adjustable)			○	○	OZB-A5703	95,-
	1,0× (with micrometer) only in combination with OZB-A5703			○	○	OZB-A5704	255,-
	for SLR cameras (Nikon)			○	○	OZB-A5706	255,-
	for SLR cameras (Olympus)			○	○	OZB-A5707	255,-
	for SLR cameras (Canon)			○	○	OZB-A5708	255,-
Darkfield unit	Darkfield unit	○	○	○	○	OZB-A4601	70,-
Object clamp	Object clamp	○	○	○	○	OBB-A6205	35,-
Stand	Pillar style, without illumination	✓		✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		✓		
	Please find more stands in the catalogue on page 78 and on our website www.kern-sohn.com						
Stage plate	Frosted glass/∅ 94,5 mm		✓		✓	OZB-A5192	19,-
	Black-white/∅ 94,5 mm	✓	✓	✓	✓	OZB-A5191	19,-
	Glass/∅ 94,5 mm		○		○	OZB-A5190	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for transmitted and incident illumination	○	○	○	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	○	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com						

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZP-5



OZP 558



OZP 555



Trinocular head

4

LAB LINE

Professional and powerful – thanks to its extremely large magnification range, strong illumination and first-class optics

Features

- The KERN OZP stereo zoom microscope stands out through its above-average magnification range and its robust shape which is also ergonomic, it enables effortless, simple working over a period of several hours.
- The KERN OZP series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination.
- With its large working distance, an extra large field of view and brilliant resolution, the KERN OZP provides sharp, high-contrast and colour-true images.
- The extremely large, continuously adjustable magnification range from 6 to 55 times magnification means that you can work quickly and effectively.
- There is a choice of two binocular models as well as two trinocular models for connecting a camera for documentation purposes and for quality reports.
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures.
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Zoology and botany, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube: 35° inclined
- Magnification ratio: 9,2:1
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H
330×285×470 mm
- Net weight approx. 4,5 kg

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZP 555	Binocular	HSWF 10×/ø 23 mm	ø 38,3 – 4,2	0,6× – 5,5×	Pillar style	–	1030,-
OZP 556	Binocular	HSWF 10×/ø 23 mm	ø 38,3 – 4,2	0,6× – 5,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	1230,-
OZP 557	Trinocular	HSWF 10×/ø 23 mm	ø 38,3 – 4,2	0,6× – 5,5×	Pillar style	–	1330,-
OZP 558	Trinocular	HSWF 10×/ø 23 mm	ø 38,3 – 4,2	0,6× – 5,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	1530,-

Stereo zoom microscope KERN OZP-5

Eyepiece	Specifications - Objectives						
	Magnification	Standard 1,0×	Auxiliary objectives				
			0,37×	0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	6× - 55×	2,22× - 20,4×	3× - 27,5×	4,2× - 38,5×	9× - 82,5×	12× - 110×
	Field of view mm	∅ 38,3 - 4,2	∅ 99,1 - 10,8	∅ 76,7 - 8,4	∅ 54,8 - 6	∅ 25,6 - 2,8	∅ 19,2 - 2,1
SWF 15×	Total magnification	9× - 82,5×	3,33× - 30,5×	4,5× - 41,25×	6,3× - 57,75×	13,5× - 123,75×	18× - 165×
	Field of view mm	∅ 28,3 - 3,1	∅ 76,6 - 8,35	∅ 56,7 - 6,2	∅ 40,5 - 4,4	∅ 18,9 - 2,1	∅ 14,2 - 1,5
SWF 20×	Total magnification	12× - 110×	4,44× - 40,7×	6× - 55×	8,4× - 77×	18× - 165×	24× - 220×
	Field of view mm	∅ 23,3 - 2,5	∅ 63,1 - 6,9	∅ 46,7 - 5,1	∅ 33,3 - 3,6	∅ 15,6 - 1,7	∅ 11,7 - 1,3
SWF 30×	Total magnification	18× - 165×	6,66× - 61,1×	9× - 82,5×	12,6× - 115,5×	27× - 247,5×	36× - 330×
	Field of view mm	∅ 15 - 1,6	∅ 40,5 - 4,4	∅ 30 - 3,3	∅ 21,4 - 2,3	∅ 10 - 1,1	∅ 7,5 - 0,8
Working distance		108 mm	275 mm	195 mm	145 mm	50 mm	35 mm

Model outfit		Model KERN				Order number	Price/piece excl. of VAT ex works €
		OZP 555	OZP 556	OZP 557	OZP 558		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	✓✓	✓✓	OZB-A5503	60,-
	SWF 15×/∅ 17 mm	○	○	○	○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○	○	○	○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○	○	○	○	OZB-A5506	85,-
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	○	○	OZB-A5512	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5514	110,-
Achromatic auxiliary objectives	0,37× only in combination with a universal stand	○	○	○	○	OZB-A5611	135,-
	0,5×	○	○	○	○	OZB-A5612	120,-
	0,7×	○	○	○	○	OZB-A5613	120,-
	1,5×	○	○	○	○	OZB-A5615	120,-
	2,0×	○	○	○	○	OZB-A5616	120,-
	Soldering protection lens	○	○	○	○	OZB-A5614	45,-
C-Mount	0,3× (focus adjustable)			○	○	OZB-A5701	120,-
	0,5× (focus adjustable)			○	○	OZB-A5702	120,-
	1,0× (focus adjustable)			○	○	OZB-A5703	95,-
	1,0× (with micrometer) only in combination with OZB-A5703			○	○	OZB-A5704	255,-
	for SLR cameras (Nikon)			○	○	OZB-A5706	255,-
	for SLR cameras (Olympus)			○	○	OZB-A5707	255,-
	for SLR cameras (Canon)			○	○	OZB-A5708	255,-
Darkfield unit	Darkfield unit	○	○	○	○	OZB-A4601	70,-
Object clamp	Object clamp	○	○	○	○	OBB-A6205	35,-
Stand	Pillar style, without illumination	✓		✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		✓		
	Please find more stands in the catalogue on page 78 and on our website www.kern-sohn.com						
Stage plate	Frosted glass/∅ 94,5 mm		✓		✓	OZB-A5192	19,-
	Black-white/∅ 94,5 mm	✓	✓	✓	✓	OZB-A5191	19,-
	Glass/∅ 94,5 mm		○		○	OZB-A5190	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	○	○	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	○	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com						

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZR-5



OZR 564



OZR 563

4

PROFESSIONAL LINE

Professional stereo zoom microscope with parallel optics for excellent images, depth of field, contrast and fatigue-free working

Features

- The KERN OZR series is a special, high-quality stereo zoom microscope with parallel optics for demanding analyses.
- The KERN OZR series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination.
- The parallel optical system is a high-quality optical system and provides excellent images with the best contrast, colour and depth of field with fatigue-free working. Refocusing is also only necessary in very few cases when magnifying the zoom.
- The continuously adjustable magnification range from 8 to 50 times magnification means that you can work quickly and effectively.
- As standard, the models of the KERN OZR series are trinocular and are therefore equipped for connecting a camera for documentation purposes and for quality reports.
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures.
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Parallel optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 6,25:1
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 305×300×540 mm
- Net weight approx. 5,5 kg

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZR 563	Trinocular	HWF 10×/ø 22 mm	ø 27,5 – 4,4	0,8× – 5×	Pillar style	–	1940,-
OZR 564	Trinocular	HWF 10×/ø 22 mm	ø 27,5 – 4,4	0,8× – 5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	2140,-

Stereo zoom microscope KERN OZR-5

Eyepiece	Specifications - Objectives				
	Magnification	Standard Plan 1,0×	Achromatische Objektive		
			0,5×	0,7×	1,5× (Auxiliary)
HWF 10×	Total magnification	8× - 50×	4× - 25×	5,6× - 35×	12× - 75×
	Field of view mm	∅ 27,5 - 4,4	∅ 55 - 8,8	∅ 39,3 - 6,3	∅ 18,33 - 2,93
SWF 15×	Total magnification	12× - 75×	6× - 37,5×	8,4× - 5,5×	18× - 112,5×
	Field of view mm	∅ 21,25 - 3,4	∅ 42,5 - 6,8	∅ 30,36 - 4,86	∅ 14,17 - 2,27
SWF 20×	Total magnification	16× - 100×	8× - 50×	11,2× - 70×	24× - 150×
	Field of view mm	∅ 17,5 - 2,8	∅ 35 - 5,6	∅ 25 - 4	∅ 11,67 - 1,87
SWF 30×	Total magnification	24× - 150×	12× - 75×	16,8× - 105×	36× - 225×
	Field of view mm	∅ 11,25 - 1,8	∅ 22,5 - 3,6	∅ 16,1 - 2,57	∅ 7,5 - 1,2
Working distance		91 mm	186 mm	135 mm	40 mm

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OZR 563	OZR 564		
Eyepieces (30,0 mm)	HWF 10×/∅ 22 mm	✓✓	✓	OZB-A5502	60,-
	SWF 15×/∅ 17 mm	○○	○○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○○	○○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○○	○○	OZB-A5506	85,-
	HWF 10×/∅ 22 mm (reticule 0,1 mm)	○	○	OZB-A5511	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	110,-
Plan achromatic objective	1,0×	✓	✓	OZB-A5603	490,-
Achromatic objectives	0,5×	○	○	OZB-A5601	205,-
	0,7×	○	○	OZB-A5602	205,-
	1,5× Only in combination with OZB-A5603	○	○	OZB-A5604	265,-
Trinocular beamsplitter	Division 100:0	✓	✓	OZB-A5401	575,-
	Division 50:50	○	○	OZB-A5402	575,-
C-Mount	0,3× (focus adjustable)	○	○	OZB-A5701	120,-
	0,5× (focus adjustable)	○	○	OZB-A5702	120,-
	1,0× (focus adjustable)	○	○	OZB-A5703	95,-
	1,0× (with micrometer) only in combination with OZB-A5703	○	○	OZB-A5704	255,-
	for SLR cameras (Nikon)	○	○	OZB-A5706	255,-
	for SLR cameras (Olympus)	○	○	OZB-A5707	255,-
	for SLR cameras (Canon)	○	○	OZB-A5708	255,-
Darkfield unit	Darkfield unit	○	○	OZB-A4601	70,-
Object clamp	Object clamp	○	○	OBB-A6205	35,-
Stand	Pillar style, without illumination	✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		
Stage plate	Frosted glass/∅ 94,5 mm		✓	OZB-A5192	19,-
	Black-white/∅ 94,5 mm	✓	✓	OZB-A5191	19,-
	Glass/∅ 94,5 mm		○	OZB-A5190	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com				

✓ = Included with delivery

○ = Option

Stereo zoom microscope KERN OZS-5



OZS 574



OZS 573

4

PROFESSIONAL LINE

High-quality parallel optics for the best images, depth of field and contrast – with extra large zoom range

Features

- The devices in the KERN OZS series are special, high-quality stereo zoom microscopes with parallel optics and an above-average zoom range for demanding analyses.
- The KERN OZS series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination.
- The parallel optics is a high-quality optical system and provides excellent images with the best contrast, colour and depth of field with fatigue-free working.
- The exceptionally large, adjustable magnification range from 8 to 80 times magnification gives you continuous zoom for the views you need.
- As standard, the models of the KERN OZS series are trinocular and therefore equipped for connecting a camera for documentation purposes and for quality reports.
- These models are particularly flexible due to the modular construction, the pillar stand as well as the powerful, longlife LED reflected and transmitted illumination which can be integrated as an option.
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Parallel optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 10:1
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 305×300×540 mm
- Net weight approx. 5,5 kg

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZS 573	Trinocular	HWF 10×/ø 22 mm	ø 27,5 – 2,75	0,8× – 8×	Pillar style	–	2750,-
OZS 574	Trinocular	HWF 10×/ø 22 mm	ø 27,5 – 2,75	0,8× – 8×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	2960,-

Stereo zoom microscope KERN OZS-5

Eyepiece	Specifications - Objectives				
	Magnification	Standard Plan 1,0×	Achromatische Objektive		
			0,5×	0,7×	1,5× (Auxiliary)
HWF 10×	Total magnification	8× - 80×	4× - 40×	5,6× - 56×	12× - 120×
	Field of view mm	∅ 27,5 - 2,75	∅ 55 - 5,5	∅ 39,3 - 3,93	∅ 18,33 - 1,83
SWF 15×	Total magnification	12× - 120×	6× - 60×	8,4× - 84×	18× - 180×
	Field of view mm	∅ 21,25 - 2,13	∅ 42,5 - 4,25	∅ 30,36 - 3,04	∅ 14,17 - 1,42
SWF 20×	Total magnification	16× - 160×	8× - 80×	11,2× - 112×	24× - 240×
	Field of view mm	∅ 17,5 - 1,75	∅ 35 - 3,5	∅ 25 - 2,5	∅ 11,67 - 1,17
SWF 30×	Total magnification	24× - 240×	12× - 120×	16,8× - 168×	36× - 360×
	Field of view mm	∅ 11,25 - 1,13	∅ 22,5 - 2,25	∅ 16,1 - 1,61	∅ 7,5 - 0,75
Working distance		91 mm	186 mm	135 mm	40 mm

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OZS 573	OZS 574		
Eyepieces (30,0 mm)	HWF 10×/∅ 22 mm	✓✓	✓	OZB-A5502	60,-
	SWF 15×/∅ 17 mm	○○	○○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○○	○○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○○	○○	OZB-A5506	85,-
	HWF 10×/∅ 22 mm (reticule 0,1 mm)	○	○	OZB-A5511	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	110,-
Plan achromatic objective	1,0×	✓	✓	OZB-A5603	490,-
Achromatic objectives	0,5×	○	○	OZB-A5601	205,-
	0,7×	○	○	OZB-A5602	205,-
	1,5× Only in combination with OZB-A5603	○	○	OZB-A5604	265,-
Trinocular beamsplitter	Division 100:0	✓	✓	OZB-A5401	575,-
	Division 50:50	○	○	OZB-A5402	575,-
C-Mount	0,3× (focus adjustable)	○	○	OZB-A5701	120,-
	0,5× (focus adjustable)	○	○	OZB-A5702	120,-
	1,0× (focus adjustable)	○	○	OZB-A5703	95,-
	1,0× (with micrometer) only in combination with OZB-A5703	○	○	OZB-A5704	255,-
	for SLR cameras (Nikon)	○	○	OZB-A5706	255,-
	for SLR cameras (Olympus)	○	○	OZB-A5707	255,-
	for SLR cameras (Canon)	○	○	OZB-A5708	255,-
Darkfield unit	Darkfield unit	○	○	OZB-A4601	70,-
Object clamp	Object clamp	○	○	OBB-A6205	35,-
Stand	Pillar style, without illumination	✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		
Stage plate	Frosted glass/∅ 94,5 mm		✓	OZB-A5192	19,-
	Black-white/∅ 94,5 mm	✓	✓	OZB-A5191	19,-
	Glass/∅ 94,5 mm		○	OZB-A5190	19,-
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com				

✓ = Included with delivery

○ = Option

Coaxial microscope KERN OZC-5



Plug in for power supply

4

PROFESSIONAL LINE

The coaxial with parallel optics for excellent contrast and depth of field

Features

- The KERN OZC has been developed specially to meet requirements for high contrast and depth of field. These devices are absolutely essential for the LCD/LED electronics industry.
- The coaxial 2 W LED reflected illumination which is integrated into the objective guarantees selective depth of focus, so that even low-lying sections can be recorded (e.g. the bottom of a drilled hole).
- The parallel optics is a high-quality optical system and provides excellent images with the best contrast, colour and depth of field with fatigue-free working. Refocusing is also only necessary in very few cases when magnifying the zoom.
- The large, adjustable magnification range from 18 to 65 times gives you continuous zoom when you are working.
- As standard, the KERN OZC is trinocular and is therefore equipped for connecting a camera for documentation purposes and for quality reports.
- The arm curved stand ensures precise adjustment and focusing of your sample. The stand base is particularly heavy and therefore offers a high level of stability and an extremely secure footing.
- A large selection of eyepieces and a mechanical stage extension are available as accessories.
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- LCD/LED electronics, semiconductor technology

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), zoom for variable magnification, e.g. LCD/LED electronics, circuit boards, ICs

Technical data

- Optical system: Parallel optics
- Brightness adjustable
- Tube 45° inclined
- Magnification ratio: 3,6:1
- Interpupillary distance: 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 305×180×405 mm
- Net weight approx. 6,6 kg.

STANDARD



OPTION



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZC 583	Trinocular	HSWF 10×/ø 23 mm	ø 12,78 – 3,5	1,8× – 6,5×	Arm curved	2 W LED (coaxial incident)	4280,-

Coaxial microscope KERN OZC-5

Eyepiece	Specifications - Objectives	
	Magnification	Standard 1,0×
HWF 10×	Total magnification	18× - 65×
	Field of view mm	∅ 12,78 - 3,5
SWF 15×	Total magnification	27× - 97,5×
	Field of view mm	∅ 9,5 - 2,6
SWF 20×	Total magnification	36× - 130×
	Field of view mm	∅ 7,78 - 2,2
SWF 30×	Total magnification	54× - 195×
	Field of view mm	∅ 5 - 1,4
Working distance		92 mm

Model outfit		Model KERN	Order number	Price/piece excl. of VAT ex works €
		OZC 583		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	OZB-A5503	60,-
	SWF 15×/∅ 17 mm	○○	OZB-A5504	60,-
	SWF 20×/∅ 14 mm	○○	OZB-A5505	70,-
	SWF 30×/∅ 9 mm	○○	OZB-A5506	85,-
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	OZB-A5512	95,-
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	OZB-A5513	110,-
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	OZB-A5514	110,-
C-Mount	0,3× (focus adjustable)	○	OZB-A5701	120,-
	0,5× (focus adjustable)	○	OZB-A5702	120,-
	1,0× (focus adjustable)	○	OZB-A5703	95,-
	1,0× (with micrometer) only in combination with OZB-A5703	○	OZB-A5704	255,-
	for SLR cameras (Nikon)	○	OZB-A5706	255,-
	for SLR cameras (Olympus)	○	OZB-A5707	255,-
	for SLR cameras (Canon)	○	OZB-A5708	255,-
Stand	Arm curved, without illumination	✓		
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	OZB-A5781	175,-
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	OZB-A5782	240,-
External illumination	Please find the information about external illumination units in the catalogue from page 81 and on our website www.kern-sohn.com			

✓ = Included with delivery

○ = Option

Gem microscope KERN OZG-4



OZG 493



OZG 497 *



Backside of OZG 497



Tilt positions



Tilt positions

4

LAB LINE

The specialist for jewellers and the gem industry

Features

- The KERN OZG series has been specially developed for jewellers and mineral observations in the gem industry. Precious stones and gems can be checked and handled with this stereo zoom microscope.
- You have a choice of a strong halogen transmitted illumination unit as well as halogen reflected and transmitted illumination variants, each with an additional frontal illumination.
- As well as very good optical characteristics, these models form an ideal package with their dark field unit with object clamp which is included in the scope of delivery.
- The KERN OZG 493 is fitted with a pillar stand as well as an integrated bright halogen light unit with reflected and transmitted illumination.
- The KERN OZG 497 has a arm curved stand, which is extremely flexible as it can be tilted and rotated Together with the powerful illumination units, which also includes a single fiber. This is an ideal solution for jewellers and the gem industry.

- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery.
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list.
- Please find detailed information in the following charts.

Scope of application

- Jewellers and gem industry

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), zoom for variable magnification, special stand for processing workpieces e.g. gems, components, precious stones

Technical data

- Optical system: Greenough optics
- Brightness adjustable
- Tube 45° inclined
- Interpupillary distance: 55 – 75 mm
- Diopter adjustment: Both-sided

OZG 493

- Magnification ratio: 5,1:1
- Overall dimensions W×D×H 310×170×350 mm
- Net weight approx. 5 kg

OZG 497

- Magnification ratio: 6,7:1
- Overall dimensions W×D×H 340×235×480 mm
- Net weight approx. 11,5 kg

STANDARD



Model	Standard configuration						Price excl. of VAT ex works €
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZG 493	Binocular	HWF 10×/ø 21,5 mm	ø 28 – 5,6	0,7× – 3,6×	Pillar style	12 V/10 W Halogen (incident) 12 V/10 W Halogen (transmitted) 10 W Fluorescence (front illumination)	465,-
OZG 497 *	Trinocular	HSWF 10×/ø 23 mm	ø 33 – 5,1	0,75× – 5,0×	Arm curved	12 V/10 W Halogen (transmitted) 10 W Fluorescence (front illumination including single fiber)	1690,-

* ONLY WHILE STOCKS LAST

Gem microscope KERN OZG-4

OZG 493	Specifications - Objectives	
Eyepiece	Magnification	Standard 1,0×
WF 5×	Total magnification	3,75× - 18×
	Field of view mm	∅ 26 - 6
HWF 10×	Total magnification	7,5× - 36×
	Field of view mm	∅ 28 - 6
WF 15×	Total magnification	11,25× - 54×
	Field of view mm	∅ 19 - 4,5
WF 20×	Total magnification	15× - 72×
	Field of view mm	∅ 12,5 - 3
Working distance		86 mm

OZG 497	Specifications - Objectives	
Eyepiece	Magnification	Standard 1,0×
HWF 5×	Total magnification	3,75× - 25×
	Field of view mm	∅ 31 - 4,6
HSWF 10×	Total magnification	7,5× - 50×
	Field of view mm	∅ 33 - 5
HWF 15×	Total magnification	11,25× - 75×
	Field of view mm	∅ 24 - 4,2
HSWF 20×	Total magnification	15× - 100×
	Field of view mm	∅ 20 - 3,5
HWF 25×	Total magnification	18,75× - 125×
	Field of view mm	∅ 15,8 - 2,4
Working distance		113 mm

4

Model outfit		Model KERN		Order number	Price/piece excl. of VAT ex works €
		OZG 493	OZG 497		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○ ○		OZB-A4101	35,-
	HWF 10×/∅ 21,5 mm	✓ ✓		OZB-A4106	35,-
	WF 15×/∅ 15 mm	○ ○		OZB-A4103	30,-
	WF 20×/∅ 10 mm	○ ○		OZB-A4104	35,-
Eyepieces (30,0 mm)	HWF 5×/∅ 23,2 mm		○ ○	OZB-A4112	40,-
	HSWF 10×/∅ 23 mm		✓ ✓	OZB-A4118	40,-
	HWF 15×/∅ 15 mm		○ ○	OZB-A4119	40,-
	HSWF 20×/∅ 14,5 mm		○ ○	OZB-A4120	60,-
	HWF 25×/∅ 11,7 mm		○ ○	OZB-A4121	60,-
C-Mount	1,0× (focus adjustable)		○	OZB-A4809	65,-
	0,3× (focus adjustable)		○	OZB-A4810	85,-
	0,5× (focus adjustable)		○	OZB-A4811	100,-
Darkfield unit	Darkfield unit	✓	✓	OZB-A4601	70,-
Object clamp	Object clamp (steel wire)	✓	✓	OZB-A4604	30,-
Stand	Pillar style, with 12 V/10 W Halogen (transmitted + incident) and 10 W Fluorescent illumination (front)	✓			
	Arm curved, with 12 V/10 W Halogen (transmitted) and 10 W Fluorescent illumination (front) + Single fiber illumination		✓		
Stage plate	Frosted glass/∅ 95 mm	✓		OZB-A4805	19,-
	Black-white/∅ 95 mm	✓		OZB-A4806	19,-
Illumination	12 V/10 W spare bulb (transmitted + incident)	✓	✓	OZB-A4804	19,-

✓ = Included with delivery

○ = Option

5 Stereo microscope sets



Stereo microscope sets KERN OZL-9 · OZM-9



Predefined stereo microscope sets with universal stand and illumination for your functional workplace

Features

- Sets which have already been defined, consisting of a stereo microscope head, a universal stand and a ring illumination from our range.
- Simple – convenient – affordable
- This saves you spending time on configuration and being spoilt for choice in the combination of different components. In this way you get an expensive and highly-flexible solution for your microscope workplace.

Model	Microscope head		Stand	Holder	Illumination	Price excl. of VAT ex works €
	Tube	Objective Zoom				
OZL 961	Binocular (OZL 461)	0,7× – 4,5×	Telescopic arm with plate	With coarse focusing knob Adjustable torque of the hand wheels	4,5 W LED ring light (OBB-A6 102)	960,-
OZL 963	Trinocular (OZL 462)	0,7× – 4,5×	Telescopic arm with plate	With coarse focusing knob Adjustable torque of the hand wheels	4,5 W LED ring light (OBB-A6 102)	1030,-
OZM 912	Binocular (OZM 546)	0,7× – 4,5×	Telescopic arm with plate (OZB-A5201)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	1440,-
OZM 913	Trinocular (OZM 547)	0,7× – 4,5×	Telescopic arm with plate (OZB-A5201)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	1740,-
OZM 932	Binocular (OZM 546)	0,7× – 4,5×	ball-bearing double telescopic arm with plate (OZB-A5203)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	1730,-
OZM 933	Trinocular (OZM 547)	0,7× – 4,5×	ball-bearing double telescopic arm with plate (OZB-A5203)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	2030,-
OZM 952	Binocular (OZM 546)	0,7× – 4,5×	Jointed arm with clamp (OZB-A5212)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	1390,-
OZM 953	Trinocular (OZM 547)	0,7× – 4,5×	Jointed arm with clamp (OZB-A5212)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	1690,-
OZM 982	Binocular (OZM 546)	0,7× – 4,5×	Spring loaded arm with clamp (OZB-A6302)	With double handle	4,5 W LED ring light (OBB-A6 102)	1380,-
OZM 983	Trinocular (OZM 547)	0,7× – 4,5×	Spring loaded arm with clamp (OZB-A6302)	With double handle	4,5 W LED ring light (OBB-A6 102)	1680,-

6 Stereo microscope modular system



Stereo microscope modular system – Head KERN OZB-M

NEW



Head of the microscope series OSF-5



Head of the microscope series OZL-46



Head of the microscope series OZM-5



Head of the microscope series OZP-5



Head of the microscope series OZO-5

Individuality, variety and flexible working through our modular construction system → Stereo microscope heads

Features

- To enable the highest level of flexibility for your special requirements and applications, we have a large selection of stereo microscope heads, universal stands and external illumination units, which are easy to combine.
- Through the different properties of the stereo microscope heads, as well as the flexibility of the universal stands and the professional fixing of our brackets, we can configure your ideal microscope to suit your needs.
- There are various microscope heads available from our product range for this purpose, both as binocular or trinocular versions.

Model	Tube	Eyepieces (included)	Objective	Price excl. of VAT ex works €
KERN			Zoom	
OSF 512	Binocular	HSWF 10×/∅ 23 mm	1×/2×	395,-
OSF 514	Binocular	HSWF 10×/∅ 23 mm	1×/3×	395,-
OSF 516	Binocular	HSWF 10×/∅ 23 mm	2×/4×	395,-
OZL 461	Binocular	HWF 10×/∅ 20 mm	0,7× - 4,5×	430,-
OZL 462	Trinocular	HWF 10×/∅ 20 mm	0,7× - 4,5×	500,-
OZM 546	Binocular	HSWF 10×/∅ 23 mm	0,7× - 4,5×	740,-
OZM 547	Trinocular	HSWF 10×/∅ 23 mm	0,7× - 4,5×	1040,-
OZP 551	Binocular	HSWF 10×/∅ 23 mm	0,6× - 5,5×	920,-
OZP 552	Trinocular	HSWF 10×/∅ 23 mm	0,6× - 5,5×	1220,-
OZO 556	Binocular	HSWF 10×/∅ 23 mm	0,8× - 7×	1350,-
OZO 557	Trinocular	HSWF 10×/∅ 23 mm	0,8× - 7×	1690,-

Stereo microscope modular system – Universal stands KERN OZB-U



OZB-A5201/OZB-A5211



OZB-A5202/OZB-A5212



OZB-A5203/OZB-A5213



OZB-A6301



OZB-A6302

Individuality, variety and flexible working through our modular construction system → Universal stands

Features

- With our universal stands and basic stands, as well as microscope heads and external illumination units, you can configure your microscope to your own specifications and adapt it to your application.
- Thanks to the versatile, adjustable universal stands it is possible to work in the very best way in all areas with the most varied of samples.
- Universal stands are available as stand base variants as well as with the option of a bench clamp. Depending on the model, you have the choice of a telescopic arm stand, a jointed arm stand or a telescopic double arm universal stand with ball bearings.
- A spring loaded universal stand including bench clamp will make your daily work with your stereo microscope easier.

Model	Description	Price excl. of VAT ex works €
KERN		
OZB-A5201	Telescopic arm – Plate – excl. holder	430,-
OZB-A5211 <small>NEW</small>	Telescopic arm – Clamp – excl. holder	390,-
OZB-A5202 *	Jointed arm – Plate – excl. holder	430,-
OZB-A5212 <small>NEW</small>	Jointed arm – Clamp – excl. holder	380,-
OZB-A5203	Telescopic double arm with ball bearings – Plate – excl. holder	720,-
OZB-A5213 <small>NEW</small>	Telescopic double arm with ball bearings – Clamp – excl. holder	670,-
OZB-A6301 <small>NEW</small>	Pillar stand with "C"-shape base – excl. holder	265,-
OZB-A6302 <small>NEW</small>	Spring loaded arm – Clamp – with holder	500,-

* **ONLY WHILE STOCKS LAST**

NEW New model

Stereo microscope modular system – KERN OZB-H holder



OZB-A5301



OZB-A5306

Individuality, variety and flexible working through our modular construction system → Holder

Features

- There are two microscope head holders available for these flexible, modular systems. These brackets are suitable for all stereo microscope stands and universal stands (excluding spring loaded arm), to make focusing possible.
- The first variant available is a holder with adjustable handwheel as well as adjustment of the torque for your configuration.
- For professional applications you have the choice of a mount with coarse and fine focusing knob for the very best focusing operation.

Model	Description	Price excl. of VAT ex works €
KERN		
OZB-A5301	Holder with adjustable torque of the hand wheel. Suitable for all universal stands (except of spring loaded arm) and for all basic stands as possible accessories.	130,-
OZB-A5306	Holder with coaxial coarse and fine focusing knob and adjustable torque of the hand wheel. Suitable for all universal stands (except of spring loaded arm) and for all basic stands as possible accessories.	245,-

7

Stereo microscope modular system → KERN OZB-S basic stand



OZB-A5121 with coarse and fine adjustment



OZB-A5123 with coarse and fine adjustment as well as incident and transmitted illumination

Stereo microscope modular system – KERN OZB-S basic stand



OZB-A5104 (Arm curved stand)



OZB-A5106 (Arm curved stand) with incident and transmitted illumination



OZB-A5107 with extra small stage



OZB-A5109 with extra small stage as well as incident and transmitted illumination



OZB-A5114 with rust protection iron stage



OZB-A5127 with coated steel stage as well as coarse and fine adjustment

A holder is included with every basic stand

Model	Stand style	Illumination	Description	Dimensions mm	Price excl. of VAT ex works €
KERN					
OZB-A5 121	Pillar style	-	With coaxial coarse and fine adjustment	283×292×271,5	295,-
OZB-A5 123	Pillar style	3 W LED (incident + transmitted)	With coaxial coarse and fine adjustment	283×292×303,5	465,-
OZB-A5 104	Arm curved	-	Coarse focusing knob	283×292×240	195,-
OZB-A5 106	Arm curved	3 W LED (incident + transmitted)	Coarse focusing knob	283×292×272	395,-
OZB-A5 107	Pillar style	-	Coarse focusing knob	170×245×271,5	195,-
OZB-A5 109	Pillar style	3 W LED (incident + transmitted)	Coarse focusing knob	170×245×303,5	390,-
OZB-A5 114	Pillar style	-	With rust protection iron stage	400×300×371,5	230,-
OZB-A5 127	Pillar style	-	With coated steel stage	181×245×272	345,-

7 External light sources for stereomicroscopes

Ring illumination and cold light sources



Ring illumination KERN OZB-IR

Professional illumination units guarantee outstanding, uniform and strong illumination

Features

- Choose your favourite external illumination here to achieve maximum flexibility and greatest possible ease of use in stereo microscopy.
- These professional illumination units provide a quality of light at a high, constant intensity at all times.
- Regardless of whether your choice is space-saving ring lights or cold light sources using optical fiber, our range is all you can wish for.
- Naturally, these external illumination units also fit your standard stereo microscope, with the exception of the ring illumination units in combination with the following series: OSE-1, OSF-4G, OZL-44, OZL-45, OZL-45R, OZC-5 and OZG-4



OZB-A4571



OZB-A4572



OBB-A6102

Model	Illuminance	Inner ϕ	Colour temperature	Brightness adjustable	Illumination by segments	Price excl. of VAT ex works €
KERN		mm	K			
OZB-A4571	3W-LED	60	7000 - 11000	✓		80,-
OZB-A4572	3W-LED	60	6500 - 7000	✓	✓	140,-
OBB-A6102	4,5W-LED	63	ca. 7600	✓		140,-

✓ = Included with delivery

○ = Option

Fiber illumination KERN OZB-IF



OZB-A4515



OZB-A4512



OZB-A4531



OZB-A4532



OZB-A4533

Model	Description	Length	Illuminance	Colour temperature	Brightness adjustable	Price excl. of VAT ex works €
KERN		mm		K		
OZB-A4515	Dual fiber unit LED	300	6W	5600 - 6300	✓	160,-
OZB-A4512	Cold light source halogen	-	24V/150W	3150 - 3200	✓	290,-
OZB-A4531	Single fiber	490	Usable for OZB-A4512			175,-
OZB-A4532	Dual fiber	490				245,-
OZB-A4533	Ring fiber	900				350,-

✓ = Included with delivery

○ = Option

8 Microscope cameras & Software



Microscope cameras KERN ODC

Specialists in microscopy for measurement, counting, documentation, archiving and image processing

Features

- A large selection of microscope cameras is available for your individual applications.
- The universal microscope cameras can be used anywhere and can be connected to the microscope as well as to a laptop or PC using the USB cable (USB 2.0 or USB 3.0, see table).
- The power supply is through the USB cable, which means that no additional power supply is required.
- Your daily work is made significantly easier with the very best synchronisation, a high frame rate as well as stable image performance together with our Microscope VIS software which we deliver with the product.
- For details about our software please refer to the "Software" section in the catalogue (page 87) or see www.kern-sohn.com.
- These universal cameras can also be connected to all microscopes available on the market offering the appropriate C-mount adapter for the particular microscope.

C-mount cameras – USB 2.0 KERN ODC-1



ODC 132



ODC 152



USB-cable with micrometer slide

8

Features

- These USB 2.0 cameras give particular good images in demanding applications, such as, for example, in darkfield, phase contrast and with fluorescence applications through improved light sensitivity of the sensors.
- As well as the camera, the delivery includes our multi-lingual KERN Microscope VIS software, a USB cable and an object micrometer to calibrate the software.
- Please order the appropriate C-Mount or eyepiece adapter to fit your KERN microscope.

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	Price excl. of VAT ex works €
KERN								
ODC 132	3,1 MP	USB 2.0	5 - 30	CMOS	1/2"	colour	Win XP, Vista, 7, 8, 10	520,-
ODC 152	5,1 MP	USB 2.0	3.5 - 30	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	600,-
OBB-A 14 14 <small>NEW</small>	1× Eyepiece adapter (∅ 23,2 mm) for cameras from the ODC-1							140,-
OBB-A 14 16 <small>NEW</small>	1× Eyepiece adapter (∅ 30,0 mm) for cameras from the ODC-1							140,-
OBB-A 14 17 <small>NEW</small>	1× Eyepiece adapter (∅ 23,2 + 30,0 mm) for cameras from the ODC-1							175,-

NEW New model

C-mount cameras – USB 2.0/3.0 KERN ODC-82 · ODC-83



NEW



Features

- Through the proven CMOS technology, in connection with the USB 2.0 or USB 3.0 the images are shown quickly and clearly.
- These cameras are also ideal for more demanding applications, such as, for example, darkfield, phase contrast and for fluorescence applications.
- As well as the camera, the delivery includes our multi-lingual KERN Microscope VIS software, a USB cable, various eyepiece adapters and an object micrometer to calibrate the software.
- Please order the appropriate C-mount adapter to fit your KERN microscope now.

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	Price excl. of VAT ex works €
KERN								
ODC 822	1,3 MP	USB 2.0	15 – 48	CMOS	1/3"	colour	Win XP, Vista, 7, 8, 10	320,-
ODC 824	3,1 MP	USB 2.0	11,5 – 45	CMOS	1/2"	colour	Win XP, Vista, 7, 8, 10	390,-
ODC 825	5,1 MP	USB 2.0	6,8 – 55	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	430,-
ODC 831	3,1 MP	USB 3.0	27,3 – 53,3	CMOS	1/3"	colour	Win XP, Vista, 7, 8, 10	560,-
ODC 832	5,1 MP	USB 3.0	14,2 – 101,2	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	590,-

C-mount camera – HDMI KERN ODC-85



NEW




Scope of supplies

Features

- The ODC-851 HDMI microscope camera has been specially developed for direct HDMI connection to your HDMI compatible display device. The images can also be stored directly onto the SD card delivered with the device.
- As an alternative, a USB 2.0 connection is also still available to connect a laptop or PC.
- Power supply is from an external 12 V power unit.
- Scope of delivery: Camera, software, USB mouse, USB 2.0 cable, HDMI cable and SD card (4 GB)

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	Price excl. of VAT ex works €
KERN								
ODC 851	2 MP	HDMI, USB 2.0, SD	30 – 60	CMOS	1/2,8"	colour	Win XP, Vista, 7, 8, 10	1080,-

Eyepiece cameras – USB 2.0/3.0 KERN ODC-87 · ODC-88



ODC-87, ODC-88



Eyepiece camera fixed into the tube

STANDARD



Features

- With the KERN eyepiece cameras you can convert your standard microscope to a digital microscope, by replacing one eyepiece of your non-digital microscope with an eyepiece camera and connect this to your computer via USB.
- The universal eyepiece can be connected to the microscope as well as to a laptop or PC using the USB cable (2.0 or 3.0, see table).
- The power supply is through the USB cable, which means that no additional power supply is required.
- Your daily work is made significantly easier with the very best synchronisation, a high frame rate as well as stable image performance together with our software.
- As well as the camera, the delivery includes a simplified version of our multi-lingual KERN Microscope VIS software, a USB cable and an object micrometer to calibrate the software.

Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	Price excl. of VAT ex works €
KERN								
ODC 872	1,3 MP	USB 2.0	7,5 – 12,5	CMOS	1/3"	colour	Win XP, Vista, 7, 8, 10	200,-
ODC 874	3 MP	USB 2.0	3 – 7,5	CMOS	1/2,7"	colour	Win XP, Vista, 7, 8, 10	230,-
ODC 881	5 MP	USB 3.0	15 – 30	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	310,-

USB microscope – USB 2.0 KERN ODC-89



ODC 894



ODC 895

STANDARD



The digital USB microscope for rapid testing or for hobby use

Features

- The USB hand-held microscope is designed for rapid and simple observations. Ideally suited for coins, plants, insects and skin samples for all hobby scientists, children and students.
- With the USB microscope you can easily adjust the magnification to suit all conventional samples. The zoom range can be adjusted to a magnification of 10× as well as 200×.
- The eight LEDs fitted in the ring shape ensure strong and effective illumination of your sample. Use the adjustment wheel on the cable to control the illumination setting.
- As well as the camera, you will also find a simplified version of our multi-lingual KERN Microscope VIS software included with delivery.
- There are two stands available for you to use as a column.


Stand with integrating coaxial focusing:

- Work area: 150×80 mm
- Focus range: 51 mm
- Overall dimensions: 150×80×147 mm

Stand with focus wheel:

- Work area: 150×80mm
- Focus range: 60 mm
- Overall dimensions: 150×80×135 mm

Model	Resolution	Interface	FPS	Sensor	Sensor size	Supported operating system	Magnification levels	Focusing stand	Illumination	Price excl. of VAT ex works €
KERN										
ODC 894	2 MP	USB 2.0	15 – 30	CMOS	1/3,2"	Win XP, Vista, 7, 8, 10	10×, 200×	Coaxial	8× LED	230,-
ODC 895	2 MP	USB 2.0	15 – 30	CMOS	1/3,2"	Win XP, Vista, 7, 8, 10	10×, 200×	Focus wheel	8× LED	240,-

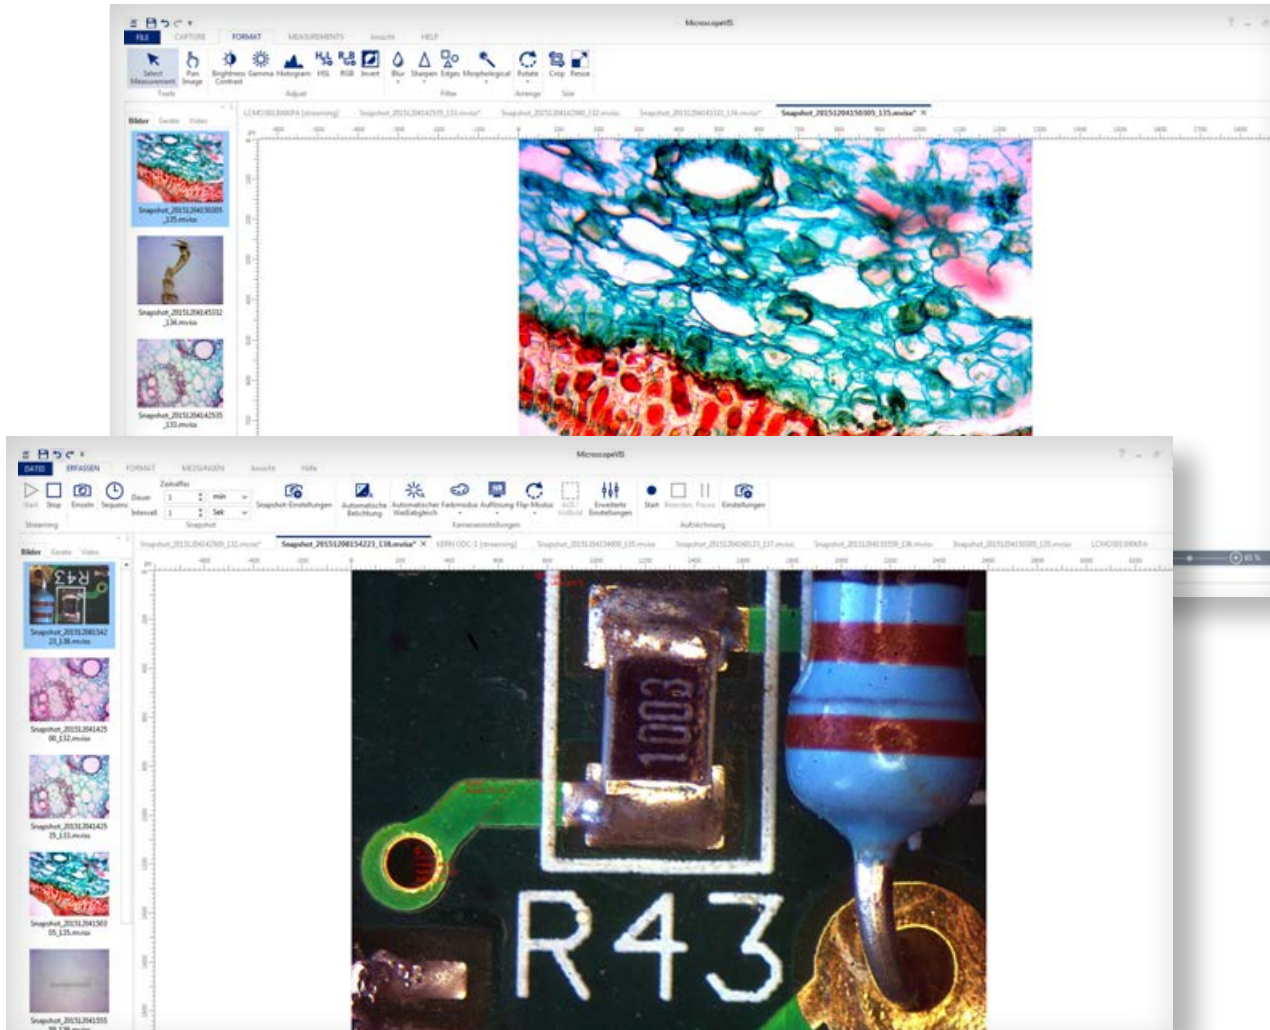

The digital specialist for measurement, counting and archiving

Features

- The VIS Microscope software (OXM 901) is a multi-lingual software, which we have developed specially for all available Kern microscope cameras.
- As well as the streaming function for the object to be viewed, the software also offers you an image snapshot function, as well as a video function.
- Various measuring functions such as, for example, functions for measuring distance, surfaces and angles and a manual counting function are available. In addition there are extensive image processing and documentation functions available, and of course an exporting function to Microsoft Office applications Word® and Excel®.

- With the display settings you can display different measurements, grid sizes, scales and rulers for the very best measuring procedure.
- Automatic white balance and automatic contrast adjustment can be performed quickly and easily, which enables efficient working procedures.
- As well as the software, a USB cable and an object micrometer are included with all KERN cameras as well as all digital microscopes.
- Please refer to the documentation for the software in the download area of our website www.kern-sohn.com for further details.

Technical data

- Can be used for Microsoft Windows XP, Windows Vista, Windows 7, Windows 8, 8.1 and Windows 10.
- Depending on the language setting of your Windows operating system the KERN VIS software will be identified and installed in the current language. This can be changed manually at any time.
- The software is available in the following languages: German, English, Spanish, Italian and French.



Refractometers

9	Analogue refractometers – type: hand-held	90
10	Digital refractometers – type: hand-held	96
11	Abbe refractometers – type: desktop	101



Daniel Junger
Manager KERN Optics

Tel. +49 [0] 7433 9933 - 155
Fax +49 [0] 7433 9933 - 149
daniel.junger@kern-sohn.com

Analogue refractometer KERN ORA



Refractive index measurement for laboratories and the industry

Features

- The KERN ORA refractometers are universal, maintenance free analogue handheld refractometers.
- The handy and robust design allows the easy, efficient and sustainable use in everyday life.
- Manually calculated conversions and errors of the user are avoided by multiple selectable scales.
- These scales are especially developed, exactly calculated and checked. They are also characterized by their thin and clear lines.
- The optical system and the prism cover are made of special material which allows a low-tolerance measuring.
- All ORA models are equipped with an eyepiece for easy and smooth setting for many different diopter strengths.
- The models marked with "ATC" have an automatic temperature compensation which enables accurate measurement at different ambient temperatures (10 °C to 30 °C).
- The following accessory-parts are included:
 - Storage box
 - Calibration liquid
 - Calibration block (if required)
 - Pipette
 - Small screwdriver
 - Cleaning tissue
- Further accessories are available optionally.

Technical data

- Die-cast housing of copper-aluminium alloy, chrome coated
- Measurement temperature without ATC: 20 °C
- Measurement temperature range with ATC: 10 °C – 30 °C
- Packing dimensions W×D×H 215×94×65 mm (depending on the model)
- Dimensions of the box: 205×75×55 mm (depending on the model)
- Product length: approx. 130 – 200 mm (depending on the model)
- Net weight approx. 135 – 600 g (depending on the model)

STANDARD



OPTION



Analogue refractometer KERN ORA

Scope of application: Sugar

The following models are particularly suitable for the measurement of the “BRIX” value. They are used to determine the sugar content in food, especially in fruit, vegetables, juice and soft drinks. In the same ideal way these refractometers serve for monitoring processes in the industry (coolant monitoring, oils, lubricants and fats).

The main scope of applications is:

- Industry: Monitoring of lubricants for process and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruits for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 10BB	Brix	0 - 10 %	0,1 %		80,-
ORA 10BA	Brix	0 - 10 %	0,1 %	✓	85,-
ORA 18BB	Brix	0 - 18 %	0,1 %		80,-
ORA 20BB	Brix	0 - 20 %	0,1 %		80,-
ORA 20BA	Brix	0 - 20 %	0,1 %	✓	85,-
ORA 32BB	Brix	0 - 32 %	0,2 %		80,-
ORA 32BA	Brix	0 - 32 %	0,2 %	✓	85,-
ORA 62BB	Brix	28 - 62 %	0,2 %		80,-
ORA 62BA	Brix	28 - 62 %	0,2 %	✓	85,-
ORA 82BB	Brix	45 - 82 %	0,5 %		80,-
ORA 80BB	Brix	0 - 80 %	0,5 %		80,-

Scope of application: Honey

The following models are particularly suitable for the measurement of the “BRIX” value, as well as the water content in honey and “degrees Baumé” to determine the relative density of liquids.

The main scope of applications is:

- Beekeeping
- Honey production

Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 3HB	Brix Baumé Water content	58 - 92 % 38 - 43 °Bé 12 - 27 %	0,5 % 0,5 °Bé 1 %		85,-
ORA 3HA	Brix Baumé Water content	58 - 92 % 38 - 43 °Bé 12 - 27 %	0,5 % 0,5 °Bé 1 %	✓	90,-
ORA 6HB	Water content	12 - 30 %	0,1 %		95,-
ORA 6HA	Water content	12 - 30 %	0,1 %	✓	100,-



Analogue refractometer KERN ORA

Scope of application: Salt

The following models are particularly suitable for the measurement and concentration control of the mass fraction of sodium chloride in water as well as of the content of NaCl (salt) in water. This is often used in the preparation and the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat.

The main scope of applications is:

- Food industry
- Restaurants and large-scale catering establishment
- Aquaristic: Fishkeepers/Fishfarmers in sea and sweetwater



Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 1SB	Salinity specific gravity	0 – 100 ‰ 1,000 – 1,070 sg	1 ‰ 0,001 sg		80,-
ORA 1SA	Salinity specific gravity	0 – 100 ‰ 1,000 – 1,070 sg	1 ‰ 0,001 sg	✓	85,-
ORA 2SB	Salt (NaCl)	0 – 28 %	0,2 %		80,-
ORA 2SA	Salt (NaCl)	0 – 28 %	0,2 %	✓	85,-
ORA 3SB	Salt (NaCl) Brix	0 – 28 % 0 – 32 %	0,2 % 0,2 %		80,-
ORA 3SA	Salt (NaCl) Brix	0 – 28 % 0 – 32 %	0,2 % 0,2 %	✓	85,-

Scope of application: Wine

The following models are particularly suitable for the measurement of the content of sugar in fruits. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes.

The main scope of applications is:

- Agriculture: Wine-growing and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Must balance

Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 1WB	Oechsle KMW (Babo) Brix	0 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,25 °KMW 0,2 %		80,-
ORA 1WA	Oechsle KMW (Babo) Brix	0 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,25 °KMW 0,2 %	✓	85,-
ORA 3WB	Oechsle Brix	30 – 140 °Oe 0 – 32 %	1 °Oe 0,2 %		80,-
ORA 3WA	Oechsle Brix	30 – 140 °Oe 0 – 32 %	1 °Oe 0,2 %	✓	85,-
ORA 7WB	Oechsle KMW (Babo) Brix	30 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,2 °KMW 0,2 %		80,-
ORA 7WA	Oechsle KMW (Babo) Brix	30 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,2 °KMW 0,2 %	✓	85,-
ORA 2AB	Vol (weight) Vol (weight)	0 – 50 % Vol 50 – 80 % Vol	1 % Vol 2,5 % Vol		80,-

Analogue refractometer KERN ORA

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.

The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)
- Veterinary



Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 2PB	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3600 nD	0,2 g/dl 0,002 sgU 0,0005 nD		80,-
ORA 2PA	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3600 nD	0,2 g/dl 0,002 sgU 0,0005 nD	✓	85,-
ORA 5PB <small>NEW</small>	Serum protein Urine (s. g. dog) Urine (s. g. cat)	2 - 14 g/dl 1,000 - 1,060 sgU 1,000 - 1,060 sgU	0,1 g/dl 0,001 sgU 0,001 sgU		80,-

NEW New model

Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue, glycol concentration (ethylene EG, propylene PG), battery fluid (BF), urea, the freezing point of fountain solution (CW) and the refractive index. Furthermore these models are suitable for the measurement of thermal exchange systems.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring
- Geothermal industry: Brine-concentration-measurement for ground heat
- Forestry/Lumbermen



Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 4FB	EG (G11/12) PG (G13) CW BF	-50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	1 °C 1 °C 5 °C 0,01 kg/l		80,-
ORA 4FA	EG (G11/12) PG (G13) CW BF	-50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	1 °C 1 °C 5 °C 0,01 kg/l	✓	85,-
ORA 1UB	Urea	0 - 40 %	0,2 %		80,-
ORA 1UA	Urea	0 - 40 %	0,2 %	✓	85,-
ORA 4UB	Urea EG (G11/12) PG (G13) CW BF	30 - 35 % -50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	0,2 % 1 °C 1 °C 5 °C 0,01 kg/l		80,-
ORA 4UA	Urea EG (G11/12) PG (G13) CW BF	30 - 35 % -50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	0,2 % 1 °C 1 °C 5 °C 0,01 kg/l	✓	85,-


Analogue refractometer KERN ORA

Scope of application: Expert applications

The following models have a special large measuring range for the refractive index and large divided scales for the measurement and clear reading of Brix values.

The main scope of applications is:

- Universal application, especially when extra large measuring ranges are required

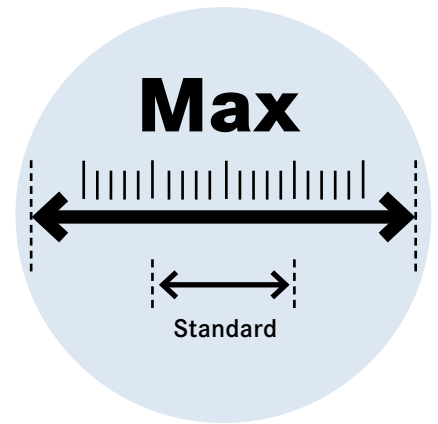

Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 80BE	Brix	0 – 50 % 50 – 80 %	0,5 % 0,5 %		140,-
ORA 90BE	Brix	0 – 42 % 42 – 71 % 71 – 90 %	0,2 % 0,2 % 0,2 %		315,-
ORA 1RE	Refractive index	1,333 – 1,405 nD 1,405 – 1,468 nD 1,468 – 1,517 nD	0,005 nD 0,005 nD 0,005 nD		320,-
ORA 4RR	Refractive index	1,440 – 1,520 nD	0,001 nD		85,-



ORA 4RR



ORA 90 BE/ORA 1RE



ORA 80BE

Scope of application: Gemmology/Jewellery

The Gem models have a special refracting-index range for jewellery. For this refractometer there is a nice leather bag in the scope of delivery included.

The main scope of applications is:

- Jewellers
- Training/Education
- Jewellery industry



Model	Scales	Measuring range	Division	ATC	Price excl. of VAT ex works €
KERN					
ORA 1GG	Refractive index	1,30 – 1,81 nD	0,01 nD		225,-



ORA 1GG

Analogue refractometer KERN ORA

Accessory parts: Analogue refractometer – ORA



Prism coverplate with LED
ORA-A1101



Calibration liquid/
Contact liquid



Leather bag
ORA-A2103



Calibration block

Model	Description	Price excl. of VAT ex works €
KERN		
ORA-A1101	Prism coverplate with integrated LED illumination	19,-
ORA-A2103	Leather bag for analog refractometers	19,-
ORA-A1001	Calibration liquid – distilled water Volume: 2,5 ml	19,-
ORA-A1002	Contact liquid – Clove oil (for Calibration value 19,6%) Volume: 2,5 ml	19,-
ORA-A1003	Calibration liquid – saturated salt solution Volume: 2,5 ml	19,-
ORA-A1004	Contact liquid – Clove oil (for Calibration value 78,8%) Volume: 2,5 ml	19,-
ORA-A1005	Calibration block for models ORA 82BB, ORA 3HA, ORA 3HB, ORA 6HA, ORA 6HB , ORA 4RR	19,-
ORA-A1107	Contact liquid – Alpha-Bromnaphthalene Volume: 2,5 ml	19,-
ORA-A1008	Calibration block for model ORA 1GG	25,-
ORA-2001	Prism coverplate (spare part)	19,-

Relationship overview – refractometer calibration (analogue)

Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number block
ORA 10BA; ORA 10BB; ORA 18BB; ORA 1RE; ORA 1SA; ORA 1SB; ORA 1UA; ORA 1UB; ORA 1WA; ORA 1WB; ORA 20BA; ORA 20BB; ORA 2AB; ORA 2PA; ORA 2PB; ORA 2SA; ORA 2SB; ORA 32BA; ORA 32BB; ORA 3SA; ORA 3SB; ORA 3WA; ORA 3WB; ORA 4FA; ORA 4FB; ORA 4UA; ORA 4UB; ORA 5PB; ORA 7WA; ORA 7WB; ORA 80BB; ORA 80BE; ORA 90BE	0 % Brix	distilled water	ORA-A1001	-	-
ORA 62BA; ORA 62BB	29,6 % Brix	saturated salt solution	ORA-A1003	-	-
ORA 3HA; ORA 3HB; ORA 82BB	78,8 % Brix	Clove oil CAS 8000-34-8	ORA-A1004	yes	ORA-A1005
ORA 4RR	1,4875 nD	Clove oil CAS 8000-34-8	ORA-A1004	yes	ORA-A1005
ORA 6HA; ORA 6HB	19,6 % Brix	Clove oil CAS 8000-34-8	ORA-A1002	yes	ORA-A1005
ORA 1GG	1,515 nD	Alpha-Bromnaphthalene CAS 90-11-9	ORA-A1107	yes	ORA-A1008

Digital refractometer KERN ORD



Transport and storage case



Battery compartment

Digital refractive index measurement for laboratories and the industry for multi-application

Features

- The KERN ORD refractometers are accurate and universal maintenance free digital handheld refractometers.
- The typical and practical design is suitable for a quick and convenient everyday use and is characterized by its easy-using and robustness.
- The large display is easy to read. Mistakes in reading are avoided.
- A large selection of models is available with single or multiple scales. This allows the use in various applications.
- The instrument comes with an optimized software that can show a result in different scales.
- The integrated automatic temperature compensation (ATC), avoids the manual conversion of the measurement. This allows a quick and efficient usage of the instrument.
- The following accessory-parts are included:
 - Calibration liquid
 - Pipette
 - Storage box
 - 2 × AAA batteries
 - Leather bag
 - Small screwdriver
 - Cleaning tissue

Technical data

- Measurement temperature: 10°C – 30°C
- Packing dimensions W×D×H 235×200×65 mm
- Overall dimensions W×D×H 133×65×38 mm
- Net weight approx. 200 g
- Power supply: 2 × AAA (1,5 V)
- Lifetime of the battery: 10000 measurements
- ATC (Automatic Temperature Compensation)
- Minimum sample volume: 2-3 drops
- Automatic energy management (turns off after 5 minutes)

Digital refractometer KERN ORD

Scope of application: Sugar

The following models are particularly suitable for the measurement of the “BRIX” value. They are used to determine the sugar content in food, especially in fruit, vegetables, juice and sweet or soft drinks. In the same ideal way, these refractometers serve in monitoring processes in the industry (coolant monitoring, oils, lubricants and fats). Alternatively, the display can be switched to show the refractive index.

The main scope of applications is:

- Industry: Monitoring of lubricants in machines and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 45BM	Brix Refractive index	0 - 45 % 1,3330 - 1,4098 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	340,-
ORD 92BM	Brix Refractive index	58 - 92 % 1,4370 - 1,5233 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	370,-
ORD 85BM	Brix Refractive index	0 - 85 % 1,3330 - 1,5100 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	395,-

Scope of application: Honey

The following models are particularly suitable for the measurement of the “BRIX” value, the water content in honey according to the International Honey Commission (IHC2002) and “degrees Baumé” to determine the relative density of liquids. Alternatively the display can be switched to show the refractive index.

The main scope of applications is:

- Beekeeping
- Honey production



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 92HM	Brix Baumé Water content Refractive index	58 - 92 % 38 - 43 °Bé 13 - 25 % 1,4370 - 1,5233 nD	± 0,2 % ± 0,1 °Bé ± 0,1 % ± 0,0003 nD	0,1 % 0,1 °Bé 0,1 % 0,0001 nD	370,-

Digital refractometer KERN ORD

Scope of application: Salt

The following models are particularly suitable to determine the concentration of NaCl (salt) in water. This is often used for the preparation and for the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat. Alternatively the display can be switched to show the refractive index.

The main scope of applications is:

- Food industry
- Restaurants, and large-scale catering establishment, canteens



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 1SM	Salt (NaCl) Refractive index	0 – 28 % 1,3330 – 1,3900 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	340,-
ORD 3SM	Brix Salt (NaCl) Refractive index	0 – 35 % 0 – 28 % 1,3330 – 1,3900 nD	± 0,2 % ± 0,2 % ± 0,0003 nD	0,1 % 0,1 % 0,0001 nD	340,-

Scope of application: Wine

The following models are particularly suitable for the measurement of the sugar content in fruit. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes.

The main scope of applications is:

- Agriculture: Wine-growing (viticulture) and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Most Waage

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 2WM	Mass SW Vol. AP Oechsle KMW (Babo)	0 – 35 % 0 – 22 % 30 – 150 °Oe 0 – 25 °KMW	± 0,2 % ± 0,1 % ± 1 °Oe ± 0,1 °KMW	0,1 % 0,1 % 1 °Oe 0,1 °KMW	340,-

Digital refractometer KERN ORD

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.

The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 1PM	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3990 nD	± 0,1 g/dl ± 0,001 sgU ± 0,0003 nD	0,1 g/dl 0,001 sgU 0,001 nD	340,-

Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue, glycol concentration (ethylene EG, propylene PG), battery fluid (BF), urea, the freezing point of fountain solution (CW) and the refractive index. Furthermore these models are suitable for the measurement of thermal exchange systems.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring
- Geothermal industry: Brine-concentration-measurement for ground heat
- Forestry/Lumbermen



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 2UM	EG PG BF CW	-50 - 0 °C -50 - 0 °C 1.00 - 1.50 kg/l -40 - 0 °C	± 0,5 °C ± 0,5 °C ± 0,01 kg/l ± 0,5 °C	0,1 °C 0,1 °C 0,01 kg/l 0,1 °C	340,-
ORD 5UM	EG PG Urea CW	-50 - 0 °C -50 - 0 °C 0 - 40 % -40 - 0 °C	± 0,5 °C ± 0,5 °C ± 0,2 % ± 0,5 °C	0,1 °C 0,1 °C 0,1 % 0,1 °C	340,-
ORD 6US	Urea	0 - 40 %	± 0,2 %	0,1 %	340,-


Digital refractometer KERN ORD

Scope of application: Expert applications

The following model has a special large measuring range for the refractive index.

The main scope of applications is:

- Universal measuring instrument, especially for applications with extra large measuring ranges

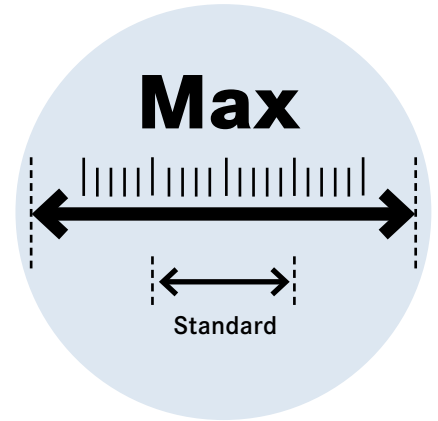

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORD 1RS	Refractive index	1,3330 - 1,5400 nD	± 0,0003 nD	0,0001 nD	430,-

Accessory parts: Digital refractometer – ORD

Model	Description	Price excl. of VAT ex works €
KERN		
ORA-A1001	Calibration liquid – distilled water Volume: 2,5 ml	19,-
ORA-A1006	Calibration liquid – Triethyl citrate Volume: 2,5 ml	19,-
ORD-A2104	Leather bag for digital refractometer (Spare part)	25,-



Calibration liquid/
Contact liquid

Relationship overview – refractometer calibration (digital)					
Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number block
ORD 45BM; ORD 85BM; ORD 1SM; ORD 3SM; ORD 2WM; ORD 1PM; ORD 1RS, ORD 2UM; ORD 5UM; ORD 6US	0 % Brix	distilled water	ORA-A1001	-	-
ORD 92BM; ORD 92HM	60 % Brix	Triethyl citrate CAS 77-93-0	ORA-A1006	-	-

Abbe refractometer KERN ORT-1



Refractive index measurement for pharmacy, laboratories and industry

Features

- The KERN ORT refractometers are universal analog Abbe refractometers.
- The handy and robust design allows the easy, efficient and sustainable use in everyday life
- The integrated scale allows the use in different applications and provides the best possible security to read the measurement results accurately.
- The scope of delivery includes:
 - Calibration solution
 - Calibration block
 - Pipette
 - Small screwdriver
 - Cleaning tissue
- Accessories are available as options

Technical data

- Measurement temperature: 20 °C
- Overall dimensions W×D×H
180×90×240 mm
- Packing dimensions W×D×H
350×130×270 mm
- Net weight approx. 1950 g

STANDARD



Abbe refractometer KERN ORT-1


Scope of application: Industry/Pharmacy/Laboratory

The following model is a simple yet highly reliable Abbe refractometer with a digital thermometer. Liquid, solid and pasty samples can be evaluated. This refractometer is robust, accurate and easy to use. Optionally a solide aluminium case for transport and storage is available. It measures the refractive index (nD).

The main scope of applications is:

- Sugar industry: for example cane sugar
- Pharmacy
- Beverage industry
- Food industry
- Chemical industry
- Oil industry/Refinery
- Laboratories
- Training

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORT 1RS	Brix Refractive index	0 - 95 % 1,3000 - 1,7000 nD	± 0,1 % ± 0,0002 nD	0,25 % 0,0005 nD	695,-

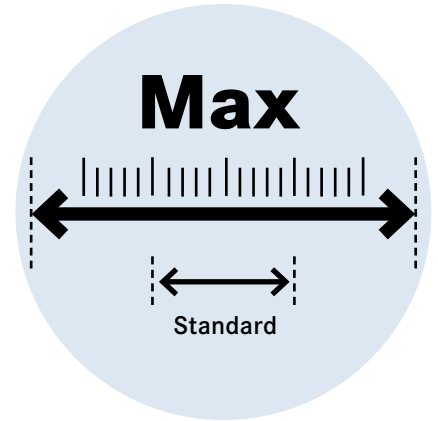

Accessory parts: Abbe refractometer – ORT

Model	Description	Price excl. of VAT ex works €
KERN		
ORA-A1102	Aluminium suitcase Dimension: 310×120×240 mm, weight: 1300 g	90,-
ORA-A2266	Digital thermometer (0 °C – 50 °C)	55,-
ORA-A2267	Calibration block for ORT 1RS	40,-
ORA-A1107	Contact liquid – Alpha-Bromonaphthalene Volume: 2,5 ml	25,-



Transport and storage case
ORA-A1102



Calibration block
ORA-A2267

Relationship overview – refractometer calibration (Abbe)

Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number block
ORT 1RS	engraved on the block (nD value)	Alpha-Bromnaphthalene CAS 90-11-9	ORA-A1107	yes	ORA-A2267