

ETI

ETI "PROFESSIONAL" SERIES 4-CELL STAINLESS STEEL PLATFORMS



Low profile STAINLESS STEEL electronic platforms with removable loading plate. Fitted with IP68 STAINLESS STEEL load cells. Suitable for creating scales and electronic weighing systems for all types of industrial and commercial applications. Standard version is with approved load cell.

Working in cooperation with:

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ
Tel. 0040-264566473 Fax. 0040-364-815440
office@cantare.com.ro

The best solution
for advanced industrial
applications

MAIN FEATURES

- Fitted with 4 STAINLESS STEEL shear-beam OIML approved load cells each with 350 Ohm input resistance with protection against dust and immersion according to IP68 standards.
- Stainless steel bearing tubular structure, with removable stainless steel plate (except for the ELCI models which have a non removable plate) and IP67 junction box housing.
- Adjustable, stainless steel shock-proof jointed feet and level.
- Up to 15 Vdc power supply.
- Hermetic junction box and wiring cables with sheathing according to IP67 standards, and shielded 5m long 6-pin cable with connectors for connection to the indicator.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Connection to the indicator and calibration with CE-M 3000e single range or 3000e+3000e dual range approval.
- High resolution models for internal factory use.


OPTIONS FOR ATEX VERSION

- CCATEX: ATEX certificate for each load cell.
- JB4QA: ATEX certified junction box.
- DCATEXMECH: Declaration of conformity of the whole system composed of PLATFORM + JUNCTION BOX + LOAD CELLS (only if the platform is ordered without the weight indicator; otherwise, refer to the certifications available for the indicator to which it will be connected).

EXTRAS AVAILABLE

- Indicator support stand.
- Frames for flush floor installation.
- Access ramps.
- Models with special sizes and capacities.

DETAIL 1

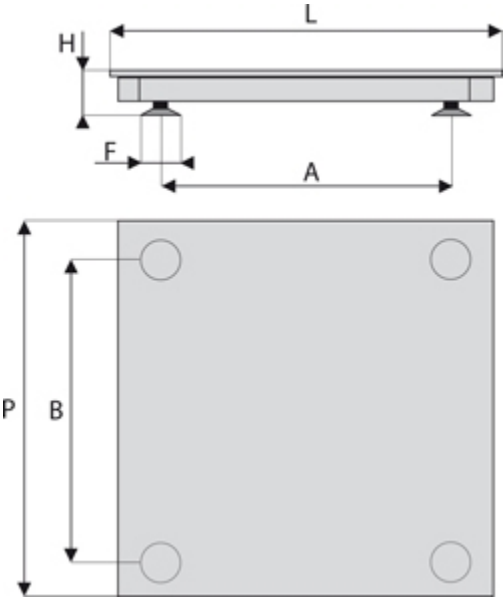

Mod. / Dim.	L	P	H	A	B	F
ELCI	800	800	90	650	650	75
ETAI	1000	1000	90	850	850	75
ETMI	1000	1250	90	850	1070	75
ETBI	1250	1250	90	1070	1070	75
ETDI	1250	1500	115	1070	1320	75
ETEI	1500	1500	115	1320	1320	75
ETFI	1500	2000	130	1300	1800	75
ETGI	1500	2000	150	1300	1800	100
ETHI	1500	2500	180	1280	2280	100
ETLI	2000	2500	180	1780	2280	100

dimensions in mm

VERSIONS

Versioni disponibili

Codice	l x w x h (mm)	N° celle	Max (kg)	d (g)	 (g) *	 2R (g) *	d HR (g) *
ELCI3	800x800x90	4x300kg	300	50	100	--	20
ELCI6	800x800x90	4x500kg	600	100	200	100-200	50
ELCI15	800x800x90	4x1000kg	1500	200	500	200-500	100
ETAI3	1000x1000x90	4x300kg	300	50	100	--	20
ETAI6	1000x1000x90	4x500kg	600	100	200	100-200	50
ETAI15	1000x1000x90	4x1000kg	1500	200	500	200-500	100
ETMI3	1000x1250x90	4x300kg	300	50	100	--	20
ETMI6	1000x1250x90	4x500kg	600	100	200	100-200	50
ETMI15	1000x1250x90	4x1000kg	1500	200	500	200-500	100
ETBI3	1250x1250x90	4x500kg	300	50	100	--	20
ETBI6	1250x1250x90	4x500kg	600	100	200	100-200	50
ETBI15	1250x1250x90	4x1000kg	1500	200	500	200-500	100
ETDI6	1250x1500x115	4x500kg	600	100	200	100-200	50
ETDI15	1250x1500x115	4x1000kg	1500	200	500	200-500	100
ETDI30	1250x1500x115	4x2000kg	3000	500	1000	500-1000	200
ETEI6	1500x1500x115	4x500kg	600	100	200	100-200	50
ETEI15	1500x1500x115	4x1000kg	1500	200	500	200-500	100
ETEI30	1500x1500x115	4x2000kg	3000	500	1000	500-1000	200
ETFI6	1500x2000x130	4x500kg	600	100	200	100-200	50
ETFI15	1500x2000x130	4x1000kg	1500	200	500	200-500	100
ETFI30	1500x2000x130	4x2000kg	3000	500	1000	500-1000	200
ETGI60	1500x2000x150	4x3000kg	6000	1000	2000	1000-2000	500
ETHI30	1500x2500x180	4x3000kg	3000	500	1000	--	200
ETHI60	1500x2500x180	4x3000kg	6000	1000	2000	1000-2000	500
ETHI100	1500x2500x180	4x5000kg	10000	2000	5000	2000-5000	1000
ETLI30	2000x2500x180	4x3000kg	3000	500	1000	--	200
ETLI60	2000x2500x180	4x3000kg	6000	1000	2000	1000-2000	500
ETLI100	2000x2500x180	4x5000kg	10000	2000	5000	2000-5000	1000

(*) Divisioni ottenibili solo con le relative opzioni.



www.diniargeo.com



DINI AR GEO
FRANCE sarl
Nogent-sur-Marne

DINI AR GEO
GMBH
Sinsheim - Germany

DINI AR GEO
UK Ltd
Taunton - United Kingdom

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China

DINI AR GEO
WEIGHBRIDGES
Calto (RO) - Italy



HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy



SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNICAL ASSISTANCE SERVICE